



TOWEL RAILS
LIVING ROOM RADIATORS

HYDRONIC & ELECTRIC

P R I C E L I S T
NEW PRODUCTS 2026

COLORS



STANDARD



RAL 9010 - R01
BIANCO
PURE WHITE



RAL 9016 - R02
BIANCO TRAFFICO
TRAFFIC WHITE



COLOR
GREEN



CLASSIC


Must have selection colors



RAL 9001 - R14
CREMA
CREAM



T11
BIANCO OPACO
MATT WHITE



T10
BEIGE OPACO
MATT BEIGE




RAL 1013 - R40
PEARL WHITE



S17
BAHAMA BEIGE



RAL 9005 - R13
NERO
JET BLACK



RAL 7001 - R21
GRIGIO ARGENTO
SILVER GREY



T19
BRITISH GREY



S07
GRAFITE
GRAPHITE



F43
GREY ANTRACITE



RAL 1021 - R05
GIALLO ACCESO
YELLOW RAPE



H27
ROSSO VIVO
BRIGHT RED




RAL 3003 - R08
ROSSO RUBINO
RUBY RED



RAL 5017 - R18
BLU OLTREMARE
OVERSEAS BLUE



RAL 7030 - R22
GRIGIO PIETRA
STONE GREY



F30
WHITE SAND



F25
QUARTZ DUST



F31
CORTEN BROWN



F36
TERRA



RAL 8017 - R09
TESTA DI MORO
DARK BROWN



F23
SPARKLING GREY



F04
GRIGIO GRAFITE
GRAPHITE GREY



F15
NERO BRILLANTE MET.
METAL SPARKLING BLACK



F24
BLACK STAR



T01
NERO OPACO
MATT BLACK



RAL 6019 - R26
WEISSGRÜN
LIGHT GREEN



F45
SAGE GREEN



F14
EFFETTO BRONZO ANTICO
OLD BRONZE EFFECT

Colors, like features, follow the changes of emotions.
(Pablo Picasso)



SPECIAL

Innovative and modern colors



F20
MILKY



S03
PERGAMON






















T15
TELA OPACO
TELA



T20
WHITE GREY



F09
GRIGIO ALBA MET.
GRAPHITE LIGHT GREY

	 NEW			 NEW
S02 MANHATTAN	F52 MARRAKECH LIGHT	H48 TORTORA DOVE	T12 GRIGIO CHIARO OPACO MATT LIGHT GREY	T23 POWDER
 NEW	 NEW	 NEW	 NEW	
S22 PERLAGE	F46 VELVETY SAND	F07 EFFETTO ARGENTO SILVER EFFECT	T24 NABUK	F38 SANDSTONE
	 NEW	 NEW	 NEW	 NEW
T17 ACAI MATT	S27 VIRGINIA LEAF	S24 BRIGHT COPPER	S25 VINTAGE COPPER	F49 NEW LIGHT CORAL
		 NEW		
F34 RED SAND	F35 FOREST GREEN	S23 JAZZ BRASS	F41 AMBER GOLD	F22 ORO CLASSICO CLASSIC GOLD
 NEW			 NEW	 NEW
F51 POZZOLANA	F39 BALMORAL GREY	F44 CLAY	S29 SMOKY QUARTZ	F50 HIGHLAND
	 NEW		 NEW	
H56 PIETRA LAVICA LAVIC STONE	S28 ANVIL	F26 DARK ALUMINIUM	F48 BASALT	F27 MOONSHINE
 NEW				 NEW
S26 ANODIC SILVER	F32 GREY SKY	H09 LAGO LAKE	F37 DENIM BLUE	S30 CAST IRON
				 NEW
F33 EMERALD SAND	F06 NERO RUVIDO MET. METAL ROUGH BLACK	M01 GOLD BLACK	W02 CARBONE CARBON	F53 SILVER LOOK

For a more accurate consultation of the colors, please refer to CORDIVARI COLOR SYSTEM.

Cordivari company has a proven industrial tradition and is now one of the most important manufacturers in the heating and plumbing industry in Italy. Founded in 1972 by Ercole Cordivari, the company is producing calorifiers & buffer tanks, solar thermal systems, compressed air receivers, design radiators and fan coil units.

Cordivari plants are situated on an area of 370.000 square meters and employs more than 700 employees. All products are designed and manufactured in Italy at the Cordivari facilities, ensuring total "Made in Italy" quality. Thanks to its development strategies, to new technologies and to the training of new human focused resources, Cordivari is equipped with modern structures and advanced production processes.

Sustainability-oriented choices allow for productive and research activities to be carried out in full respect for people and environment. The company operates according to the UNI EN ISO 14001 Environmental Management System and the UNI EN ISO 45001 Safety Management System, in addition to the UNI EN ISO 9001 Quality Management System, which ensures the full quality and reliability of the products. The highly qualified management, the constant research for innovative solutions and the extremely customer-oriented company policy, stands for the leading market position and the exclusive know-how in the field of integrated heating systems, that the Cordivari group has acquired. All this is the result of a continuous commitment to achieve Customer Satisfaction.



Cav. Ercole Cordivari

OUR KNOW-HOW

Thanks to the experience gained in over 40 years of activity, the Cordivari company has contributed to the evolution of the sector introducing innovative solutions on the market, oriented towards design, savings and domestic comfort. Cordivari has been the protagonist of the evolution of the design and functionality of the heating terminals thanks to the introduction of innovations in the field of technics, processes and materials.

At the end of the 80s it was the first company to introduce on the market a decorative radiator made of stainless steel, from which a whole line of products was born, and over the years has become a "cult" of the sector and a hallmark of the company. Over the years, the study of materials has been complemented by a continuous research in design and finishes, always aware of trends in architecture and building techniques.

Today the Cordivari range of radiators is the most complete on the market, with over 100 models that explore every material, ranging from tubular to towel warmers, from decorative radiators to heating bodies designed in collaboration with the most prestigious international representatives.



QUALITY AND SUSTAINABILITY

Choose serenity.

Today, more than ever, those who choose a Cordivari product choose serenity!

With the introduction of the new ErP Ecodesign standards, we have chosen to offer you the certainty of performance and reliability.

The creation of the Cordivari LAB represents this precise choice.


Since 2015, the company has equipped itself with a state-of-the-art laboratory and testing area, capable of testing any product or system, measuring and certifying its performance.

Through severe procedures, ruled by European standards, and complex instruments, Cordivari is the only Italian manufacturer able in performing accurate internal tests on 100% of the products, in compliance with European regulations.





ISO 9001
Quality System



ISO 14001
Environmental System



ISO 45001
Workplace Safety System

Quality, safety, and environment as a vision

Awareness for the future



Sustainability Report



Codice di condotta fornitori


Code of Conduct for Suppliers

CORDIVARI

Code of Conduct

Shared ethics with partners throughout the supply chain

Focus on sustainability throughout the product life cycle

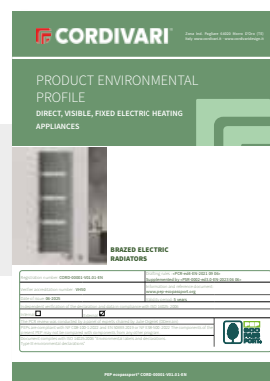

EPD according to ISO 14025

COMPLETE SYSTEMS FOR THE **GREEN** HOME

Cordivari, a leading company in the sector, has constantly evolved, updated, and transformed itself, introducing and flanking its historical products with systems and solutions that are the result of research and development and that today represent strategic assets for the company.


The production approach is oriented towards high-efficiency systems designed to optimize the living comfort and energy efficiency of buildings, through different business units that are perfectly interconnected, such as the radiators and towel warmers division, solar thermal systems, water recovery and treatment, DHW cylinders and Heat Pump systems. The company vision is committed to total responsibility and sustainability.

Internal organization and relevant production processes are supporting this vision, allowing the products to fulfill the requirements of efficiency and sustainability throughout their life cycle.


By developing its offer for the markets, Cordivari is using patented solutions able to combine comfort, energy performance, wellness and savings, through the use of the best industrial technologies based on renewable sources and a responsible use of energy and environmental resources.




Radiators and Towel Rails

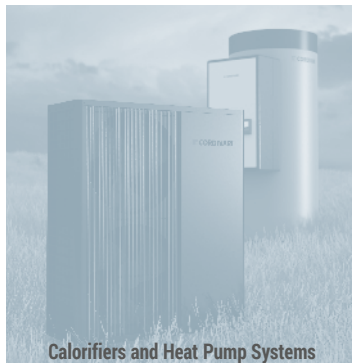

Calorifiers and Heat Pump Systems

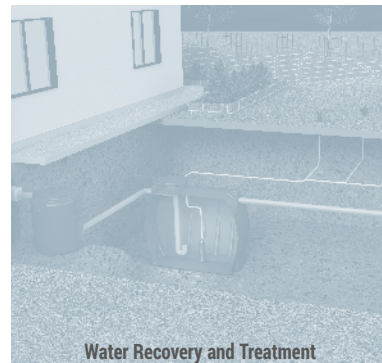

Water Recovery and Treatment

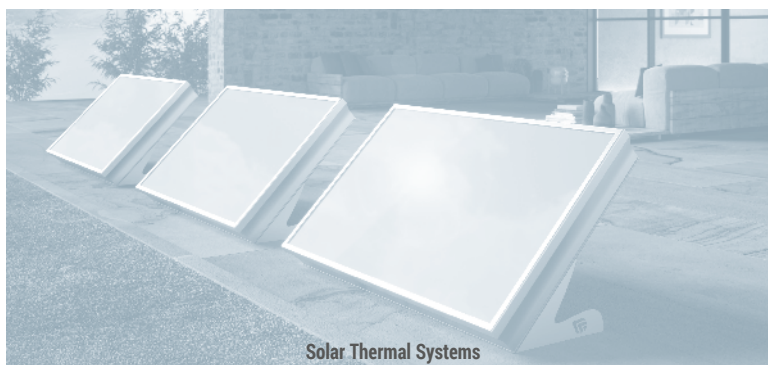

Solar Thermal Systems

	MODEL		
	Alessandra CL 50	new	16
	Alessandra CL 50 Electric With heating element for smart home systems and Wi-Fi Tech digital thermostat	new	32
	Alessandra CL 70	new	18
	Alessandra CL 70 Electric With heating element for smart home systems and Wi-Fi Tech digital thermostat	new	34
	Claudia® Electric With heating element for smart home systems and Wi-Fi Tech digital thermostat		38
	Dory Electric With heating element for smart home systems and Wi-Fi Tech digital thermostat		48
	Elen 18 Electric polished stainless steel With heating element for smart home systems and Wi-Fi Tech digital thermostat		58
	Federica DX Electric With heating element for smart home systems and Wi-Fi Tech digital thermostat		54
	Federica SX Electric With heating element for smart home systems and Wi-Fi Tech digital thermostat		56
	Gloria 22 Electric With heating element for smart home systems and Wi-Fi Tech digital thermostat		46
	Kelly 5010 DX Electric With heating element for smart home systems and Wi-Fi Tech digital thermostat		50
	KELLY 5010 SX Electric With heating element for smart home systems and Wi-Fi Tech digital thermostat		52
	Laura CL 22	new	20
	Laura CL 22 Electric With heating element for smart home systems and Wi-Fi Tech digital thermostat	new	36
	Leila Electric polished stainless steel With heating element for smart home systems and Wi-Fi Tech digital thermostat		62
	Loretta Electric With Square thermostat	new	64
	Lucy 18 Electric With heating element for smart home systems and Wi-Fi Tech digital thermostat		44
	Naïke St Electric With heating element for smart home systems and Wi-Fi Tech digital thermostat		42
	Rosy 70 horizontal	new	24
	Rosy 70 tandem horizontal	new	28
	Rosy 70 tandem vertical	new	26
	Rosy 70 vertical	new	22
	Sandy Electric polished stainless steel With heating element for smart home systems and Wi-Fi Tech digital thermostat		60



Hot Water Radiators

TOWEL RAILS & LIVING RADIATORS

14



TOWEL RAILS & LIVING RADIATORS



Electric Radiators

WI-FI & SMART HOME

30



ELECTRIC RADIATORS
WI-FI & SMART HOME

ACCESSORIES

66

ACCESSORIES

HOT WATER RADIATORS **TOWEL RAILS & LIVING RADIATORS**





TOWEL RAILS &
LIVING RADIATORS

ELECTRIC RADIATORS
WI-FI & SMART HOME

ACCESSORIES

ALESSANDRA CL 50

WARRANTY 5 YEARS

new



Color: F36 Terra

FEATURES

P. max: 5 bar

T. max: 110°C

Functioning: hot water

Connections: n° 2 x 1/2" G - 1 x 1/2" G

MATERIAL:

- Ø 30 mm collectors in painted mild steel.
- 50x10 mm horizontal heating elements in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included. The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

Cardboard angular and profiles protected by a recyclable film in polyethylene. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart on pages 2 and 3.

CERTIFICATES



AVAILABLE FUNCTIONS

- ☒ Hot water
- ☒ Electric
- ☒ Dual energy

AVAILABLE ACCESSORIES



Kristal valve Total Color, angled with thermostatic option, colored




Total Color, Kristal valve, angled pipe centres 50 mm Right or Left with thermostatic option, colored




Thermostatic head Kristal TC Fully colored

Complete list, codes, prices, and details of the Accessories from page 68.



Detail of the 50 mm pipe-centres version.

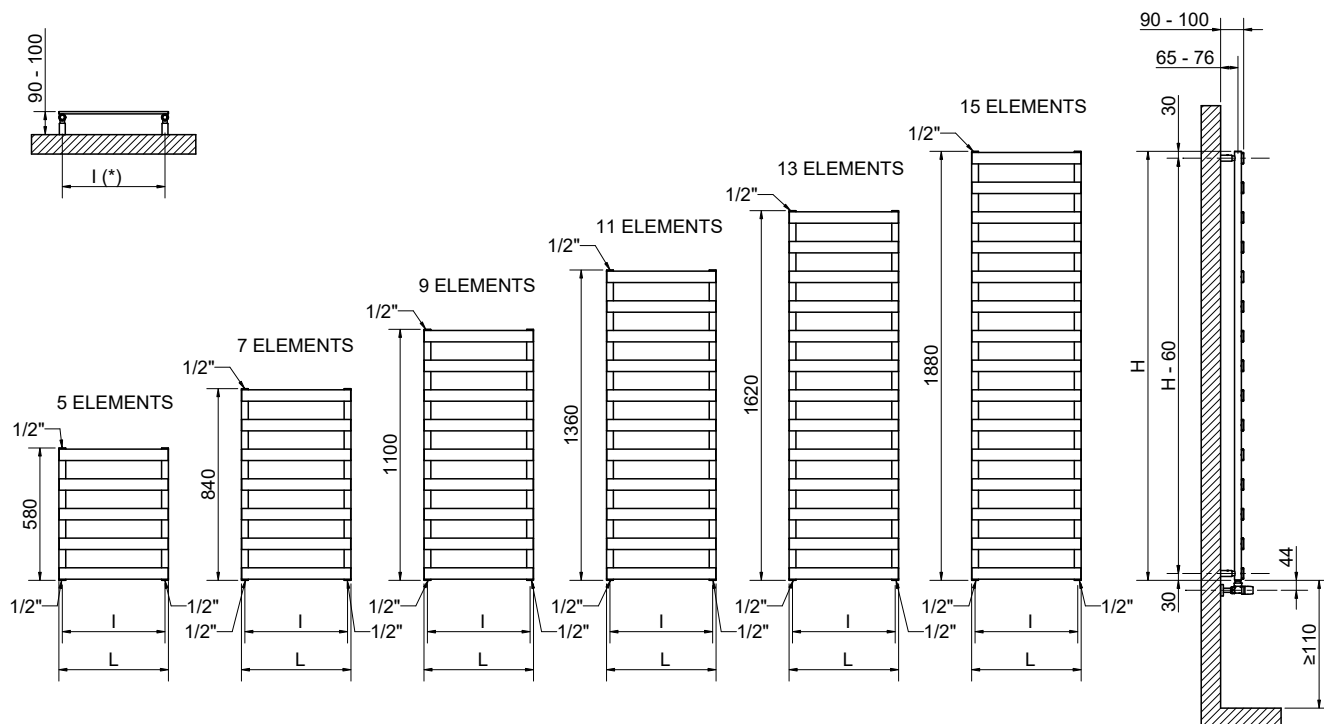

(*) The fixing kit has the same pipe centre (l) as the radiator

ALESSANDRA CL 50

				Price [€]							Thermal output					
Height	Width	Pipe Centres	Art. nr.				Art. nr.				Dry Weight	Surface	Water content	Δt 50°C	Δt 30°C	Exp.
[mm]	L [mm]	I [mm]	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Kg]	[m²]	[lt]	[Watt]	[Watt]	n
580	400	370	3551426100378	332,00	432,00	482,00	3551426100384	432,00	532,00	582,00	3,8	0,2	1,4	216	117	1,1966
	430	400	3551426100294	334,00	434,00	484,00	3551426100318	434,00	534,00	584,00	4,0	0,4	1,5	225	122	1,1970
	480	450	3551426100295	338,00	438,00	488,00	3551426100319	438,00	538,00	588,00	4,3	0,4	1,6	240	131	1,1878
	530	500	3551426100296	342,00	442,00	492,00	3551426100320	442,00	542,00	592,00	4,6	0,4	1,7	255	140	1,1785
840	400	370	3551426100379	376,00	476,00	526,00	3551426100385	476,00	576,00	626,00	5,0	0,3	2,0	299	163	1,1900
	430	400	3551426100298	378,00	478,00	528,00	3551426100322	478,00	578,00	628,00	5,4	0,5	2,1	311	169	1,1888
	480	450	3551426100299	382,00	482,00	532,00	3551426100323	482,00	582,00	632,00	5,8	0,6	2,2	331	180	1,1854
	530	500	3551426100300	386,00	486,00	536,00	3551426100324	486,00	586,00	636,00	6,2	0,6	2,4	351	192	1,1820
1100	400	370	3551426100380	403,00	503,00	553,00	3551426100386	503,00	603,00	653,00	6,3	0,4	2,6	378	207	1,1794
	430	400	3551426100302	405,00	505,00	555,00	3551426100326	505,00	605,00	655,00	6,8	0,7	2,7	394	216	1,1805
	480	450	3551426100303	409,00	509,00	559,00	3551426100327	509,00	609,00	659,00	7,3	0,7	2,9	420	230	1,1829
	530	500	3551426100304	413,00	513,00	563,00	3551426100328	513,00	613,00	663,00	7,8	0,8	3,0	447	244	1,1854
1360	400	370	3551426100381	431,00	531,00	581,00	3551426100387	531,00	631,00	681,00	7,6	0,5	3,2	457	248	1,1958
	430	400	3551426100306	433,00	533,00	583,00	3551426100330	533,00	633,00	683,00	8,2	0,8	3,3	477	259	1,1937
	480	450	3551426100307	438,00	538,00	588,00	3551426100331	538,00	638,00	688,00	8,8	0,9	3,5	510	278	1,1918
	530	500	3551426100308	443,00	543,00	593,00	3551426100332	543,00	643,00	693,00	9,4	1,0	3,7	544	296	1,1895
1620	400	370	3551426100382	461,00	561,00	611,00	3551426100388	561,00	661,00	711,00	8,8	0,6	3,8	534	286	1,2236
	430	400	3551426100310	463,00	563,00	613,00	3551426100334	563,00	663,00	713,00	9,5	1,0	4,0	559	302	1,2068
	480	450	3551426100311	467,00	567,00	617,00	3551426100335	567,00	667,00	717,00	10,2	1,1	4,2	602	326	1,2002
	530	500	3551426100312	473,00	573,00	623,00	3551426100336	573,00	673,00	723,00	11,0	1,1	4,4	644	350	1,1936
1880	400	370	3551426100383	466,00	566,00	616,00	3551426100389	566,00	666,00	716,00	10,1	0,7	4,4	610	325	1,2352
	430	400	3551426100314	468,00	568,00	618,00	3551426100338	568,00	668,00	718,00	10,9	1,1	4,6	642	343	1,2266
	480	450	3551426100315	473,00	573,00	623,00	3551426100339	573,00	673,00	723,00	11,7	1,2	4,9	695	372	1,2210
	530	500	3551426100316	479,00	579,00	629,00	3551426100340	579,00	679,00	729,00	12,5	1,3	5,1	748	402	1,2153

The codes shown in the table refer to the R01 White color models

For output at different ΔT, please refer to the following formula: desired output = output at ΔT 50 x (Desired ΔT/50)ⁿ

ALESSANDRA CL 70

WARRANTY 5 YEARS



new



Color: S25 Vintage Copper

FEATURES

P. max: 5 bar

T. max: 110°C

Functioning: hot water

Connections: n° 2 x 1/2" G - 1 x 1/2" G

MATERIAL:

- Ø 38 mm collectors in painted mild steel.
- 70x11 mm horizontal heating elements in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included. The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

Cardboard angular and profiles protected by a recyclable film in polyethylene. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart on pages 2 and 3.

CERTIFICATES



AVAILABLE FUNCTIONS

- ☒ Hot water
- ☒ Electric
- ☒ Dual energy

AVAILABLE ACCESSORIES



Kristal valve Total Color, angled with thermostatic option, colored




Total Color, Kristal valve, angled pipe centres 50 mm Right or Left with thermostatic option, colored





Thermostatic head Kristal TC Fully colored

Complete list, codes, prices, and details of the Accessories from page 68.



Detail of the 50 mm pipe-centres version.

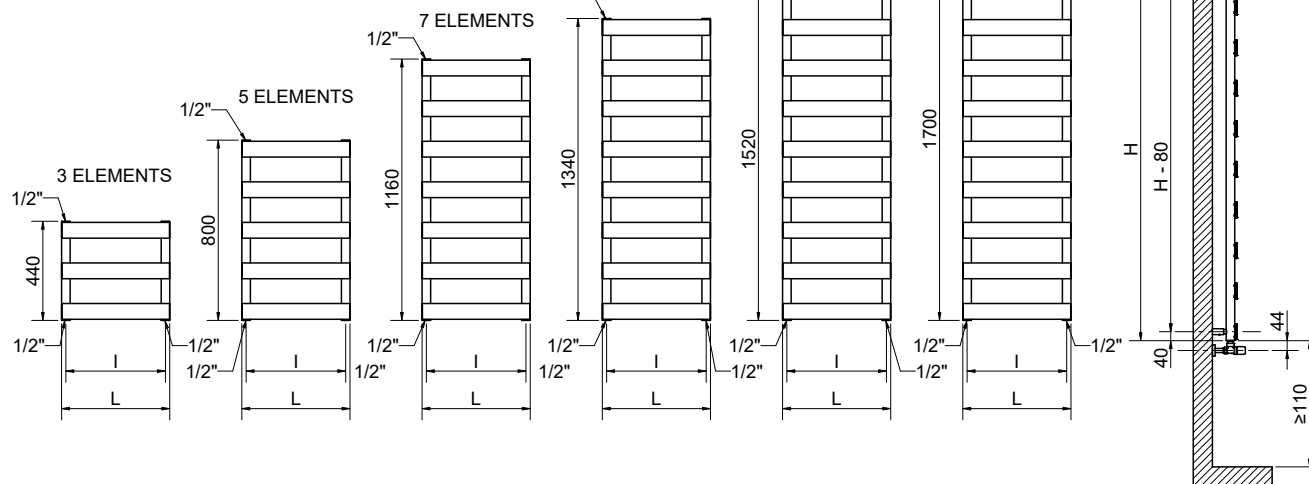

(*) The fixing kit has the same pipe centre (l) as the radiator

ALESSANDRA CL 70

				Price [€]							Thermal output					
Height	Width	Pipe Centres	Art. nr.				Art. nr.				Dry Weight	Surface	Water content	Δt 50°C	Δt 30°C	Exp.
[mm]	L [mm]	I [mm]	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Kg]	[m²]	[lt]	[Watt]	[Watt]	n
440	400	362	3551426100390	318,00	418,00	468,00	3551426100396	418,00	518,00	568,00	3,9	0,3	1,5	181	99	1,187
	430	392	3551426100342	320,00	420,00	470,00	3551426100360	420,00	520,00	570,00	4,0	0,3	1,6	190	103	1,1912
	480	442	3551426100343	324,00	424,00	474,00	3551426100361	424,00	524,00	574,00	4,3	0,3	1,7	205	111	1,1979
	530	492	3551426100344	328,00	428,00	478,00	3551426100362	428,00	528,00	578,00	4,6	0,4	1,7	219	118	1,2046
800	400	362	3551426100391	359,00	459,00	509,00	3551426100397	459,00	559,00	609,00	6,1	0,5	2,7	291	157	1,2130
	430	392	3551426100345	361,00	461,00	511,00	3551426100363	461,00	561,00	611,00	6,4	0,5	2,8	305	164	1,2118
	480	442	3551426100346	365,00	465,00	515,00	3551426100364	465,00	565,00	615,00	6,9	0,6	2,9	328	177	1,2098
	530	492	3551426100347	369,00	469,00	519,00	3551426100365	469,00	569,00	619,00	7,3	0,6	3,0	351	189	1,2077
1160	400	362	3551426100392	404,00	504,00	554,00	3551426100398	504,00	604,00	654,00	8,4	0,7	3,8	402	216	1,2128
	430	392	3551426100348	406,00	506,00	556,00	3551426100366	506,00	606,00	656,00	8,8	0,8	3,9	421	227	1,2106
	480	442	3551426100349	410,00	510,00	560,00	3551426100367	510,00	610,00	660,00	9,4	0,8	4,1	453	244	1,2073
	530	492	3551426100350	414,00	514,00	564,00	3551426100368	514,00	614,00	664,00	10,1	0,9	4,3	484	262	1,2037
1340	400	362	3551426100393	430,00	530,00	580,00	3551426100399	530,00	630,00	680,00	9,5	0,8	4,4	459	247	1,2170
	430	392	3551426100351	432,00	532,00	582,00	3551426100369	532,00	632,00	682,00	10,0	0,9	4,5	481	259	1,2100
	480	442	3551426100352	437,00	537,00	587,00	3551426100370	537,00	637,00	687,00	10,7	0,9	4,7	517	279	1,2161
	530	492	3551426100353	442,00	542,00	592,00	3551426100371	542,00	642,00	692,00	11,4	1,0	4,9	553	299	1,2021
1520	400	362	3551426100394	439,00	539,00	589,00	3551426100400	539,00	639,00	689,00	10,7	0,9	5,0	518	279	1,2145
	430	392	3551426100354	441,00	541,00	591,00	3551426100372	541,00	641,00	691,00	11,1	1,0	5,1	543	292	1,2130
	480	442	3551426100355	445,00	545,00	595,00	3551426100373	545,00	645,00	695,00	12,0	1,1	5,3	584	315	1,2109
	530	492	3551426100356	450,00	550,00	600,00	3551426100374	550,00	650,00	700,00	12,8	1,1	5,6	625	337	1,2088
1700	400	362	3551426100395	447,00	547,00	597,00	3551426100401	547,00	647,00	697,00	11,8	1,1	5,6	579	311	1,2162
	430	392	3551426100357	449,00	549,00	599,00	3551426100375	549,00	649,00	699,00	12,3	1,1	5,7	607	326	1,2160
	480	442	3551426100358	454,00	554,00	604,00	3551426100376	554,00	654,00	704,00	13,2	1,2	6,0	653	351	1,2158
	530	492	3551426100359	460,00	560,00	610,00	3551426100377	560,00	660,00	710,00	14,2	1,3	6,2	699	375	1,2155

The codes shown in the table refer to the R01 White color models

For output at different ΔT, please refer to the following formula: desired output = output at ΔT 50 x (Desired Δt/50)ⁿ

LAURA CL 22

WARRANTY 5 YEARS



new



Color: RAL 9005 - R13 Jet Black

FEATURES

P. max: **8 bar**

T. max: **110°C**

Functioning: **hot water**

Connections: **n° 2 x 1/2" G - 1 x 1/2" G**

MATERIAL:

- Ø 30 mm collectors in painted mild steel.
- Ø 22 mm horizontal heating elements in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included. The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

Cardboard angular and profiles protected by a recyclable film in polyethylene. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart on pages 2 and 3.

CERTIFICATES



AVAILABLE FUNCTIONS

- ☒ Hot water
- ☒ Electric
- ☒ Dual energy

AVAILABLE ACCESSORIES



Kristal valve Total Color, angled with thermostatic option, colored




Total Color, Kristal valve, angled pipe centres 50 mm Right or Left with thermostatic option, colored





Thermostatic head Kristal TC Fully colored

Complete list, codes, prices, and details of the Accessories from page 68.



Detail of the 50 mm pipe-centres version.

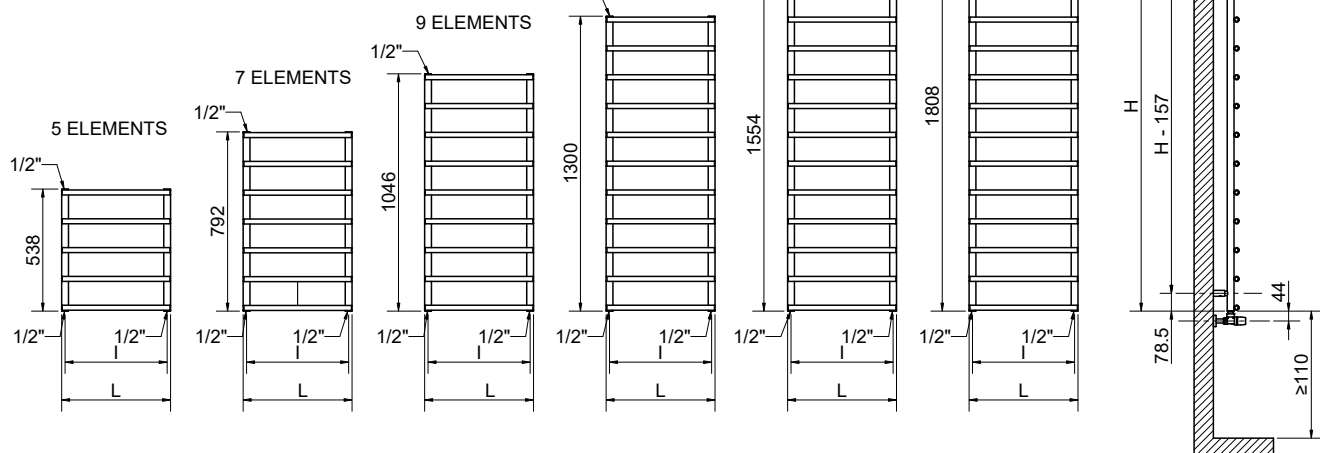

(*) The fixing kit has the same pipe centre (l) as the radiator

LAURA CL 22

				Price [€]							Thermal output					
Height	Width	Pipe Centres	Art. nr.				Art. nr.				Dry Weight	Surface	Water content	Δt 50°C	Δt 30°C	Exp.
[mm]	L [mm]	I [mm]	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Kg]	[m²]	[lt]	[Watt]	[Watt]	n
538	400	370	3551666100274	253,00	353,00	403,00	3551666100280	353,00	453,00	503,00	2,9	0,2	1,2	173	93	1,209
	430	400	3551666100238	255,00	355,00	405,00	3551666100256	355,00	455,00	505,00	2,9	0,3	1,3	181	98	1,2113
	480	450	3551666100239	260,00	360,00	410,00	3551666100257	360,00	460,00	510,00	3,1	0,3	1,4	195	105	1,2150
	530	500	3551666100240	263,00	363,00	413,00	3551666100258	363,00	463,00	513,00	3,3	0,3	1,4	209	112	1,2187
792	400	370	3551666100275	256,00	356,00	406,00	3551666100281	356,00	456,00	506,00	3,8	0,3	1,2	242	131	1,1965
	430	400	3551666100241	258,00	358,00	408,00	3551666100259	358,00	458,00	508,00	3,9	0,4	1,9	253	138	1,1957
	480	450	3551666100242	270,00	370,00	420,00	3551666100260	370,00	470,00	520,00	4,1	0,4	2,0	272	148	1,1947
	530	500	3551666100243	273,00	373,00	423,00	3551666100261	373,00	473,00	523,00	4,3	0,4	2,1	290	158	1,1937
1046	400	370	3551666100276	293,00	393,00	443,00	3551666100282	393,00	493,00	543,00	4,7	0,5	2,3	311	170	1,1840
	430	400	3551666100244	295,00	395,00	445,00	3551666100262	395,00	495,00	545,00	4,9	0,5	2,4	325	178	1,1802
	480	450	3551666100245	299,00	399,00	449,00	3551666100263	399,00	499,00	549,00	5,2	0,5	2,6	348	191	1,1744
	530	500	3551666100246	302,00	402,00	452,00	3551666100264	402,00	502,00	552,00	5,4	0,5	2,7	371	204	1,1687
1300	400	370	3551666100277	313,00	413,00	463,00	3551666100283	413,00	513,00	563,00	5,6	0,5	2,9	379	206	1,1960
	430	400	3551666100247	315,00	415,00	465,00	3551666100265	415,00	515,00	565,00	5,8	0,6	3,0	396	215	1,1938
	480	450	3551666100248	317,00	417,00	467,00	3551666100266	417,00	517,00	567,00	6,2	0,6	3,2	424	231	1,1910
	530	500	3551666100249	320,00	420,00	470,00	3551666100267	420,00	520,00	570,00	6,5	0,7	3,3	452	246	1,1881
1554	400	370	3551666100278	327,00	427,00	477,00	3551666100284	427,00	527,00	577,00	6,6	0,7	3,4	448	242	1,2072
	430	400	3551666100250	329,00	429,00	479,00	3551666100268	429,00	529,00	579,00	6,8	0,7	3,6	468	252	1,2073
	480	450	3551666100251	332,00	432,00	482,00	3551666100269	432,00	532,00	582,00	7,2	0,7	3,7	501	271	1,2075
	530	500	3551666100252	338,00	438,00	488,00	3551666100270	438,00	538,00	588,00	7,6	0,8	3,9	535	289	1,2076
1808	400	370	3551666100279	345,00	445,00	495,00	3551666100285	445,00	545,00	595,00	7,5	0,8	4,0	517	280	1,1998
	430	400	3551666100253	347,00	447,00	497,00	3551666100271	447,00	547,00	597,00	7,8	0,8	4,1	541	293	1,1981
	480	450	3551666100254	349,00	449,00	499,00	3551666100272	449,00	549,00	599,00	8,2	0,8	4,3	581	315	1,1954
	530	500	3551666100255	353,00	453,00	503,00	3551666100273	453,00	553,00	603,00	8,7	0,9	4,6	621	338	1,1927

The codes shown in the table refer to the R01 White color models

For output at different ΔT, please refer to the following formula: desired output = output at ΔT 50 x (Desired Δt/50)ⁿ

ROSY 70

VERTICAL

WARRANTY 5 YEARS



new



Color: S27 Virginia Leaf

Height H [mm]	400	500	600	700	800	1000	1200	1400	1500
Therm. output per el. $\Delta t = 50\text{ °C}$ [Watt]	38,0	45,9	53,6	61,3	68,9	84,0	99,0	114,1	121,7
Therm. output per el. $\Delta t = 30\text{ °C}$ [Watt]	19,7	23,7	27,7	31,5	35,3	42,8	50,6	58,5	62,4
Dry Weight per element [kg]	0,865	1,049	1,233	1,416	1,601	1,968	2,336	2,704	2,888
Water content [lt]	0,305	0,359	0,413	0,466	0,52	0,627	0,734	0,841	0,895
Element surface [m ²]	0,079	0,095	0,112	0,128	0,144	0,177	0,209	0,241	0,257
Exponent n	1,2860	1,2914	1,2967	1,3021	1,3075	1,3183	1,3138	1,3093	1,3070
Pipe Centres I [mm] (V3-V4 only)	342	442	542	642	742	942	1142	1342	1442

For output at different ΔT , please refer to the following formula: $\text{desired output} = \text{output at } \Delta T 50 \times (\text{Desired } \Delta T / 50)^n$

Height H [mm]	1600	1700	1800	1900	2000	2100	2200	2300	2500
Therm. output per el. $\Delta t = 50\text{ °C}$ [Watt]	129,3	137	144,7	152,5	160,3	168,2	176,1	184,1	200,3
Therm. output per el. $\Delta t = 30\text{ °C}$ [Watt]	66,4	70,4	74,5	78,4	82,4	86,4	90,5	94,6	102,8
Dry Weight per element [kg]	3,071	3,255	3,439	3,623	3,807	3,991	4,174	4,358	4,726
Water content [lt]	0,949	1,002	1,056	1,109	1,163	1,217	1,27	1,324	1,431
Element surface [m ²]	0,274	0,29	0,306	0,322	0,338	0,355	0,371	0,387	0,419
Exponent n	1,3047	1,3025	1,3002	1,3010	1,3018	1,3027	1,3035	1,3043	1,3059
Pipe Centres I [mm] (V3-V4 only)	1542	1642	1742	1842	1942	2042	2142	2242	2442

AVAILABLE ACCESSORIES



Complete list, codes, prices, and details of the Accessories from page 68.

MATERIAL:

- Ø 30 mm horizontal collectors in painted mild steel.
- 70x11 mm vertical heating elements in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included.

PACKAGING:

Cardboard angular and profiles protected by a recyclable film in polyethylene. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).


COLORS:

See color chart on pages 2 and 3.


CERTIFICATES




STANDARD CONNECTIONS WITHOUT SURCHARGE



SPECIAL CONNECTIONS (SURCHARGE € 62,00)

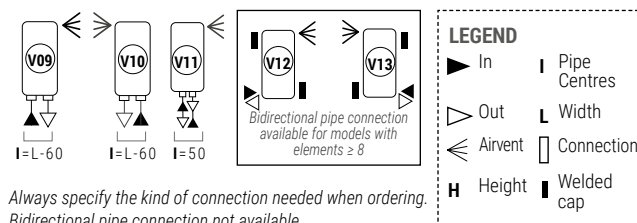


Always specify the kind of connection needed when ordering.
Bidirectional pipe connection not available.

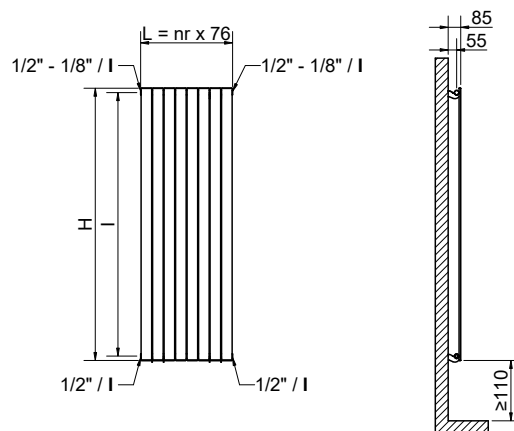

(*) The fixing kit has the same pipe centre (I) as the radiator

Quotes for Kristal valves



FEATURES	
P. max:	5 bar
Functioning:	hot water
T. max:	110°C
Connections:	n° 2 x 1/2" G - 1 x 1/8" G

HOW TO ORDER THE ROSY 70 VERTICAL RADIATOR					
Radiator model E.g.: ROSY 70 VERTICAL	Nr of Elements E.g.: 12 elements	Height in mm Example: 1500 mm	Connection variant Example: connection V01	Color code E.g.: R01 - White	Constant value
R070	12	150	V01	R01	A

Example of article code creation

R070 ROSY 70 VERTICAL
12 12 elements (see table below)
150 Height 1500 mm (see table below)
V01 Connection V01 (see next page)
R01 Color R01 - White (see color chart)
A Constant value

The article code will be:
R070 12 150 V01 R01 A

Height H [mm]		400		500		600		700		800		1000		1200		1400		1500	
Width L [mm]	N° El.	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]
228	3	114	259,00	138	261,00	161	262,00	184	264,00	207	267,00	252	273,00	297	290,00	342	323,00	365	327,00
304	4	152	290,50	184	293,00	214	294,50	245	297,50	276	301,50	336	308,50	396	329,00	456	365,00	487	371,00
380	5	190	322,00	230	325,00	268	327,00	307	331,00	345	336,00	420	344,00	495	368,00	571	407,00	609	415,00
456	6	228	353,50	275	357,00	322	359,50	368	364,50	413	370,50	504	379,50	594	407,00	685	449,00	730	459,00
532	7	266	385,00	321	389,00	375	392,00	429	398,00	482	405,00	588	415,00	693	446,00	799	491,00	852	503,00
608	8	304	416,50	367	421,00	429	424,50	490	431,50	551	439,50	672	450,50	792	485,00	913	533,00	974	547,00
684	9	342	448,00	413	453,00	482	457,00	552	465,00	620	474,00	756	486,00	891	524,00	1027	575,00	1095	591,00
760	10	380	479,50	459	485,00	536	489,50	613	498,50	689	508,50	840	521,50	990	563,00	1141	617,00	1217	635,00
836	11	418	511,00	505	517,00	590	522,00	674	532,00	758	543,00	924	557,00	1089	602,00	1255	659,00	1339	679,00
912	12	456	542,50	551	549,00	643	554,50	736	565,50	827	577,50	1008	592,50	1188	641,00	1369	701,00	1460	723,00
988	13	494	574,00	597	581,00	697	587,00	797	599,00	896	612,00	1092	628,00	1287	680,00	1483	743,00	1582	767,00
1064	14	532	605,50	643	613,00	750	619,50	858	632,50	965	646,50	1176	663,50	1386	719,00	1597	785,00	1704	811,00
1140	15	570	637,00	689	645,00	804	652,00	920	666,00	1034	681,00	1260	699,00	1485	758,00	1712	827,00	1826	855,00
1216	16	608	668,50	734	677,00	858	684,50	981	699,50	1102	715,50	1344	734,50	1584	797,00	1826	869,00	1947	899,00
1292	17	646	700,00	780	709,00	911	717,00	1042	733,00	1171	750,00	1428	770,00	1683	836,00	1940	911,00	2069	943,00
1368	18	684	731,50	826	741,00	965	749,50	1103	766,50	1240	784,50	1512	805,50	1782	875,00	2054	953,00	2191	987,00
1444	19	722	763,00	872	773,00	1018	782,00	1165	800,00	1309	819,00	1596	841,00	1881	914,00	2168	995,00	2312	1.031,00
1520	20	760	794,50	918	805,00	1072	814,50	1226	833,50	1378	853,50	1680	876,50	1980	953,00	2282	1.037,00	2434	1.075,00
1596	21	798	826,00	964	837,00	1126	847,00	1287	867,00	1447	888,00	1764	912,00	2079	992,00	2396	1.079,00	2556	1.119,00
1672	22	836	857,50	1010	869,00	1179	879,50	1349	900,50	1516	922,50	1848	947,50	2178	1.031,00	2510	1.121,00	2677	1.163,00
1748	23	874	889,00	1056	901,00	1233	912,00	1410	934,00	1585	957,00	1932	983,00	2277	1.070,00	2624	1.163,00	2799	1.207,00
1824	24	912	920,50	1102	933,00	1286	944,50	1471	967,50	1654	991,50	2016	1.018,50	2376	1.109,00	2738	1.205,00	2921	1.251,00

All intermediate sizes are available for widths from 3 to 24 elements and heights from 400 to 2500 mm.
Prices are referred to color WHITE R01 version and STANDARD connection.

Height H [mm]		1600		1700		1800		1900		2000		2100		2200		2300		2500	
Width L [mm]	N° El.	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]
228	3	388	328,00	411	329,00	434	336,00	458	339,00	481	342,00	505	461,00	528	466,00	552	475,00	601	490,00
304	4	517	373,00	548	375,00	579	383,00	610	387,00	641	391,00	673	511,00	704	517,00	736	527,00	801	543,00
380	5	647	418,00	685	421,00	724	430,00	763	435,00	802	440,00	841	561,00	881	568,00	921	579,00	1002	596,00
456	6	776	463,00	822	467,00	868	477,00	915	483,00	962	489,00	1009	611,00	1057	619,00	1105	631,00	1202	649,00
532	7	905	508,00	959	513,00	1013	524,00	1068	531,00	1122	538,00	1177	661,00	1233	670,00	1289	683,00	1402	702,00
608	8	1034	553,00	1096	559,00	1158	571,00	1220	579,00	1282	587,00	1346	711,00	1409	721,00	1473	735,00	1602	755,00
684	9	1164	598,00	1233	605,00	1302	618,00	1373	627,00	1443	636,00	1514	761,00	1585	772,00	1657	787,00	1803	808,00
760	10	1293	643,00	1370	651,00	1447	665,00	1525	675,00	1603	685,00	1682	811,00	1761	823,00	1841	839,00	2003	861,00
836	11	1422	688,00	1507	697,00	1592	712,00	1678	723,00	1763	734,00	1850	861,00	1937	874,00	2025	891,00	2203	914,00
912	12	1552	733,00	1644	743,00	1736	759,00	1830	771,00	1924	783,00	2018	911,00	2113	925,00	2209	943,00	2404	967,00
988	13	1681	778,00	1781	789,00	1881	806,00	1983	819,00	2084	832,00	2187	961,00	2289	976,00	2393	995,00	2604	1.020,00
1064	14	1810	823,00	1918	835,00	2026	853,00	2135	867,00	2244	881,00	2355	1.011,00	2465	1.027,00	2577	1.047,00	2804	1.073,00
1140	15	1940	868,00	2055	881,00	2171	900,00	2288	915,00	2405	930,00	2523	1.061,00	2642	1.078,00	2762	1.099,00	3005	1.126,00
1216	16	2069	913,00	2192	927,00	2315	947,00	2440	963,00	2565	979,00	2691	1.111,00	2818	1.129,00	2946	1.151,00	3205	1.179,00
1292	17	2198	958,00	2329	973,00	2460	994,00	2593	1.011,00	2725	1.028,00	2859	1.161,00	2994	1.180,00	3130	1.203,00	3405	1.232,00
1368	18	2327	1.003,00	2466	1.019,00	2605	1.041,00	2745	1.059,00	2885	1.077,00	3028	1.211,00	3170	1.231,00	3314	1.255,00	3605	1.285,00
1444	19	2457	1.048,00	2603	1.065,00	2749	1.088,00	2898	1.107,00	3046	1.126,00	3196	1.261,00	3346	1.282,00	3498	1.307,00	3806	1.338,00
1520	20	2586	1.093,00	2740	1.111,00	2894	1.135,00	3050	1.155,00	3206	1.175,00	3364	1.311,00	3522	1.333,00	3682	1.359,00	4006	1.391,00
1596	21	2715	1.138,00	2877	1.157,00	3039	1.182,00	3203	1.203,00	3366	1.224,00	3532	1.361,00	3698	1.384,00	3866	1.411,00	4206	1.444,00
1672	22	2845	1.183,00	3014	1.203,00	3183	1.229,00	3355	1.251,00	3527	1.273,00	3700	1.411,00	3874	1.435,00	4050	1.463,00	4407	1.497,00
1748	23	2974	1.228,00	3151	1.249,00	3328	1.276,00	3508	1.299,00	3687	1.322,00	3869	1.461,00	4050	1.486,00	4234	1.515,00	4607	1.550,00
1824	24	3103	1.273,00	3288	1.295,00	3473	1.323,00	3660	1.347,00	3847	1.371,00	4037	1.511,00	4226	1.537,00	4418	1.567,00	4807	1.603,00

ROSY 70

HORIZONTAL

WARRANTY 5 YEARS

new



MATERIAL:

- Ø 30 mm vertical collectors in painted mild steel.
- 70x11 mm horizontal heating elements in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

Cardboard angular and profiles protected by a recyclable film in polyethylene. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).


COLORS:

See color chart on pages 2 and 3.


CERTIFICATES



STANDARD CONNECTIONS WITHOUT SURCHARGE




SPECIAL CONNECTIONS (SURCHARGE € 62,00)



LEGEND


- ▶ In Pipe Centres
- ◀ Out L Width
- ≡ Airvent Connection
- H Height Welded cap

Always specify the kind of connection needed when ordering.
Bidirectional pipe connection not available.

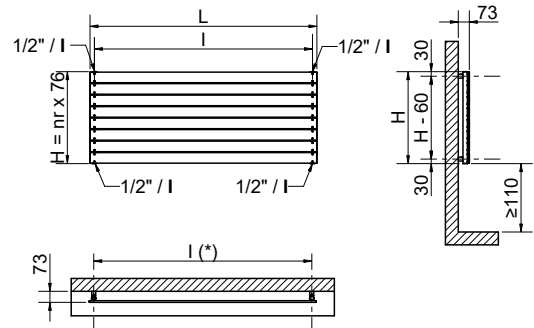

(*) The fixing kit has the same pipe centre (I) as the radiator

Quotes for Kristal valves



Width L [mm]	400	500	600	700	800	1000	1200	1400	1500
Dry Weight per element [kg]	0,865	1,049	1,233	1,416	1,601	1,968	2,336	2,704	2,888
Water content [lt]	0,305	0,359	0,413	0,466	0,52	0,627	0,734	0,841	0,895
Element surface [m²]	0,079	0,095	0,112	0,128	0,144	0,177	0,209	0,241	0,257
Pipe Centres I [mm] (H1 only)	342	442	542	642	742	942	1142	1342	1442

For output at different ΔT , please refer to the following formula: $\text{desired output} = \text{output at } \Delta T 50 \times (\text{Desired } \Delta T / 50)^n$

Width L [mm]	1600	1700	1800	1900	2000	2100	2200	2300	2500
Dry Weight per element [kg]	3,071	3,255	3,439	3,623	3,807	3,991	4,174	4,358	4,726
Water content [lt]	0,949	1,002	1,056	1,109	1,163	1,217	1,27	1,324	1,431
Element surface [m²]	0,274	0,29	0,306	0,322	0,338	0,355	0,371	0,387	0,419
Pipe Centres I [mm] (H1 only)	1542	1642	1742	1842	1942	2042	2142	2242	2442

AVAILABLE ACCESSORIES



Kristal valve Total Color,
angled with thermostatic
option, colored

Complete list, codes, prices, and details of the Accessories from page 68.

FEATURES	
P. max:	5 bar
Functioning:	hot water
T. max:	110°C
Connections:	n° 2 x 1/2" G - 1 x 1/2" G

HOW TO ORDER THE ROSY 70 HORIZONTAL RADIATOR

Radiator model E.g.: ROSY 70 HORIZONTAL	Nr of Elements E.g.: 12 elements	Width in mm Example: 1500 mm	Connection variant Example: connection H01	Color code E.g.: R01 - White	Constant value
R070	12	150	H01	R01	A

Example of article code creation

R070 ROSY 70 Horizontal
12 12 elements (see table below)
150 Width 1500 mm (see table below)
H01 Connection H01 (see next page)
R01 Color R01 - White (see color chart)
A Constant value

The article code will be:

R070 12 150 H01 R01 A

Width L [mm]		400		500		600		700		800		1000		1200		1400		1500		OUTPUT PER LINEAR METER		Exp. n
Height H [mm]	N° El.	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt=30°C		
228	3	110	259,00	138	261,00	165	262,00	193	264,00	220	267,00	275	273,00	330	290,00	386	323,00	413	327,00	147		1,2271
304	4	144	290,50	180	293,00	216	294,50	252	297,50	288	301,50	360	308,50	432	329,00	504	365,00	540	371,00	192		1,2252
380	5	177	322,00	221	325,00	265	327,00	309	331,00	353	336,00	442	344,00	530	368,00	618	407,00	662	415,00	236		1,2233
456	6	209	353,50	261	357,00	313	359,50	365	364,50	417	370,50	521	379,50	626	407,00	730	449,00	782	459,00	279		1,2214
532	7	240	385,00	300	389,00	360	392,00	420	398,00	479	405,00	599	415,00	719	446,00	839	491,00	899	503,00	321		1,2195
608	8	270	416,50	338	421,00	405	424,50	473	431,50	540	439,50	675	450,50	810	485,00	945	533,00	1013	547,00	363		1,2176
684	9	300	448,00	375	453,00	450	457,00	525	465,00	600	474,00	750	486,00	900	524,00	1050	575,00	1125	591,00	403		1,2157
760	10	329	479,50	411	485,00	493	489,50	576	498,50	658	508,50	822	521,50	987	563,00	1151	617,00	1233	635,00	442		1,2138
836	11	357	511,00	447	517,00	536	522,00	625	532,00	715	543,00	893	557,00	1072	602,00	1251	659,00	1340	679,00	480		1,2175
912	12	385	542,50	481	549,00	578	554,50	674	565,50	770	577,50	963	592,50	1155	641,00	1348	701,00	1444	723,00	516		1,2213
988	13	412	574,00	516	581,00	619	587,00	722	599,00	825	612,00	1031	628,00	1237	680,00	1443	743,00	1547	767,00	551		1,2250
1064	14	439	605,50	549	613,00	659	619,50	768	632,50	878	646,50	1098	663,50	1317	719,00	1537	785,00	1646	811,00	586		1,2287
1140	15	465	637,00	581	645,00	698	652,00	814	666,00	930	681,00	1163	699,00	1395	758,00	1628	827,00	1744	855,00	620		1,2324
1216	16	491	668,50	613	677,00	736	684,50	859	699,50	981	715,50	1227	734,50	1472	797,00	1717	869,00	1840	899,00	652		1,2361
1292	17	516	700,00	645	709,00	774	717,00	903	733,00	1032	750,00	1290	770,00	1548	836,00	1806	911,00	1935	943,00	685		1,2399
1368	18	540	731,50	675	741,00	810	749,50	945	766,50	1080	784,50	1349	805,50	1619	875,00	1889	953,00	2024	987,00	714		1,2468
1444	19	572	763,00	715	773,00	858	782,00	1001	800,00	1144	819,00	1430	841,00	1716	914,00	2001	995,00	2144	1.031,00	754		1,2536
1520	20	605	794,50	757	805,00	908	814,50	1059	833,50	1211	853,50	1513	876,50	1816	953,00	2118	1.037,00	2270	1.075,00	795		1,2605
1596	21	640	826,00	800	837,00	960	847,00	1120	867,00	1280	888,00	1600	912,00	1920	992,00	2240	1.079,00	2400	1.119,00	843		1,2541
1672	22	676	857,50	846	869,00	1015	879,50	1184	900,50	1353	922,50	1691	947,50	2029	1.031,00	2367	1.121,00	2537	1.163,00	894		1,2476
1748	23	714	889,00	893	901,00	1071	912,00	1250	934,00	1429	957,00	1786	983,00	2143	1.070,00	2500	1.163,00	2679	1.207,00	947		1,2411
1824	24	754	920,50	942	933,00	1131	944,50	1319	967,50	1508	991,50	1884	1.018,50	2261	1.109,00	2638	1.205,00	2827	1.251,00	1003		1,2346

All intermediate sizes for heights from 3 to 24 Elements and widths from 400 to 2500 mm.

Prices are referred to color WHITE R01 version and STANDARD connection.

Width L [mm]		1600		1700		1800		1900		2000		2100		2200		2300		2500		OUTPUT PER LINEAR METER		Exp. n
Height H [mm]	N° El.	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt=30°C		
228	3	441	328,00	468	329,00	496	336,00	523	339,00	551	342,00	578	461,00	606	466,00	633	475,00	689	490,00	147		1,2271
304	4	576	373,00	611	375,00	647	383,00	683	387,00	719	391,00	755	511,00	791	517,00	827	527,00	899	543,00	192		1,2252
380	5	707	418,00	751	421,00	795	430,00	839	435,00	883	440,00	927	561,00	972	568,00	1016	579,00	1104	596,00	236		1,2233
456	6	834	463,00	886	467,00	939	477,00	991	483,00	1043	489,00	1095	611,00	1147	619,00	1199	631,00	1304	649,00	279		1,2214
532	7	959	508,00	1019	513,00	1079	524,00	1139	531,00	1199	538,00	1259	661,00	1318	670,00	1378	683,00	1498	702,00	321		1,2195
608	8	1080	553,00	1148	559,00	1216	571,00	1283	579,00	1351	587,00	1418	711,00	1486	721,00	1553	735,00	1688	755,00	363		1,2176
684	9	1200	598,00	1274	605,00	1349	618,00	1424	627,00	1499	636,00	1574	761,00	1649	772,00	1724	787,00	1874	808,00	403		1,2157
760	10	1316	643,00	1398	651,00	1480	665,00	1562	675,00	1645	685,00	1727	811,00	1809	823,00	1891	839,00	2056	861,00	442		1,2138
836	11	1429	688,00	1519	697,00	1608	712,00	1697	723,00	1787	734,00	1876	861,00	1965	874,00	2055	891,00	2234	914,00	480		1,2175
912	12	1541	733,00	1637	743,00	1733	759,00	1830	771,00	1926	783,00	2022	911,00	2118	925,00	2215	943,00	2407	967,00	516		1,2213
988	13	1650	778,00	1753	789,00	1856	806,00	1959	819,00	2062	832,00	2165	961,00	2268	976,00	2371	995,00	2578	1.020,00	551		1,2250
1064	14	1756	823,00	1866	835,00	1976	853,00	2085	867,00	2195	881,00	2305	1.011,00	2415	1.027,00	2524	1.047,00	2744	1.073,00	586		1,2287
1140	15	1860	868,00	1977	881,00	2093	900,00	2209	915,00	2326	930,00	2442	1.061,00	2558	1.078,00	2674	1.099,00	2907	1.126,00	620		1,2324
1216	16	1963	913,00	2085	927,00	2208	947,00	2331	963,00	2453	979,00	2576	1.111,00	2699	1.129,00	2821	1.151,00	3067	1.179,00	652		1,2361
1292	17	2064	958,00	2193	973,00	2322	994,00	2451	1.011,00	2580	1.028,00	2709	1.161,00	2838	1.180,00	2967	1.203,00	3225	1.232,00	685		1,2399
1368	18	2159	1.003,00	2294	1.019,00	2429	1.041,00	2564	1.059,00	2699	1.077,00	2834	1.211,00	2969	1.231,00	3104	1.255,00	3374	1.285,00	714		1,2468
1444	19	2287	1.048,00	2430	1.065,00	2573	1.088,00	2716	1.107,00	2859	1.126,00	3002	1.261,00	3145	1.282,00	3288	1.307,00	3574	1.338,00	754		1,2536
1520	20	2421	1.093,00	2572	1.111,00	2724	1.135,00	2875	1.155,00	3026	1.175,00	3178	1.311,00	3329	1.333,00	3480	1.359,00	3783	1.391,00	795		1,2605
1596	21	2560	1.138,00	2721	1.157,00	2881	1.182,00	3041	1.203,00	3201	1.224,00	3361	1.361,00	3521	1.384,00	3681	1.411,00	4001	1.444,00	843		1,2541
1672	22	2706	1.183,00	2875	1.203,00	3044	1.229,00	3213	1.251,00	3382	1.273,00	3551	1.411,00	3720	1.435,00	3889	1.463,00	4228	1.497,00	894		1,2476
1748	23	2857	1.228,00	3036	1.249,00	3214	1.276,00	3393	1.299,00	3571	1.322,00	3750	1.461,00	3929	1.486,00	4107	1.515,00	4464	1.550,00	947		1,2411
1824	24	3015	1.273,00	3203	1.295,00	3392	1.323,00	3580	1.347,00	3769	1.371,00	3957	1.511,00	4146	1.537,00	4334	1.567,00	4711	1.603,00	1003		1,2346

ROSY 70

TANDEM VERTICAL

WARRANTY 5 YEARS

new




Color: RAL 8017 - R09 Dark brown

Height H [mm]	500	558	600	658	700	800	858	958	1000
Therm. output per el. $\Delta t = 50\text{ °C}$ [Watt]	67,9	74,6	79,4	86	90,7	101,9	108,2	119,1	123,7
Therm. output per el. $\Delta t = 30\text{ °C}$ [Watt]	34,8	38,3	40,7	44,1	46,5	52,1	55,3	60,8	63,1
Dry Weight per element [kg]	2,01	2,22	2,38	2,59	2,74	3,11	3,32	3,69	3,85
Water content [lt]	0,654	0,716	0,761	0,827	0,869	0,979	1,038	1,145	1,19
Element surface [m ²]	0,181	0,199	0,213	0,232	0,245	0,278	0,297	0,329	0,343
Exponent n	1,3048	1,3062	1,3073	1,3087	1,3098	1,3123	1,3137	1,3162	1,3173
Pipe Centres I [mm] (V3-V4 only)	442	500	542	600	642	742	800	900	942

For output at different ΔT , please refer to the following formula: **desired output = output at ΔT 50 x (Desired $\Delta T/50$)ⁿ**

Height H [mm]	1200	1400	1600	1800	1900	2000	2200	2300	2500
Therm. output per el. $\Delta t = 50\text{ °C}$ [Watt]	145,0	165,9	186,6	207	217,2	227,3	247,4	257,4	277,3
Therm. output per el. $\Delta t = 30\text{ °C}$ [Watt]	73,4	83,4	93,5	103,9	109	114,2	124,4	129,5	139,7
Dry Weight per element [kg]	4,58	5,32	6,05	6,79	7,16	7,52	8,26	8,63	9,36
Water content [lt]	1,405	1,619	1,833	2,048	2,155	2,262	2,477	2,589	2,798
Element surface [m ²]	0,407	0,472	0,537	0,602	0,634	0,667	0,731	0,769	0,829
Exponent n	1,33201	1,34671	1,35281	1,35031	1,34901	1,34781	1,34531	1,34401	1,3415
Pipe Centres I [mm] (V3-V4 only)	1142	1342	1542	1742	1842	1942	2142	2242	2442

AVAILABLE ACCESSORIES

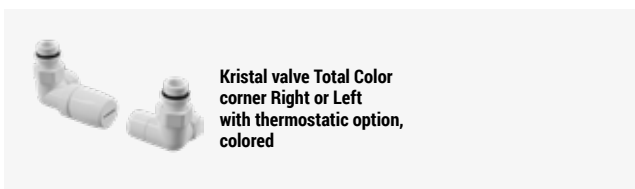

Kristal valve Total Color
corner Right or Left
with thermostatic option,
colored

Complete list, codes, prices, and details of the Accessories from page 68.

MATERIAL:

- Ø 30 mm horizontal collectors in painted mild steel.
- 70x11 mm double vertical heating elements in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included.

PACKAGING:

Cardboard angular and profiles protected by a recyclable film in polyethylene. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).


COLORS:

See color chart on pages 2 and 3.



CERTIFICATES




STANDARD CONNECTIONS WITHOUT SURCHARGE



SPECIAL CONNECTIONS (SURCHARGE € 62,00)

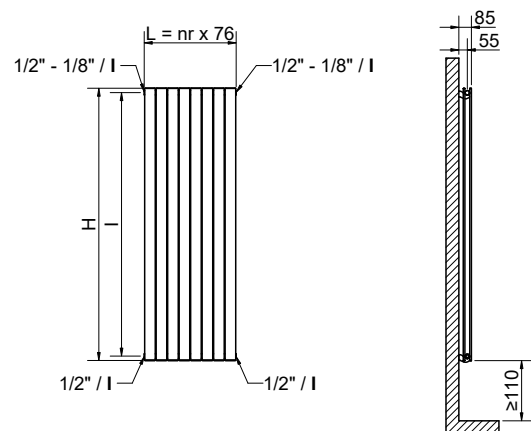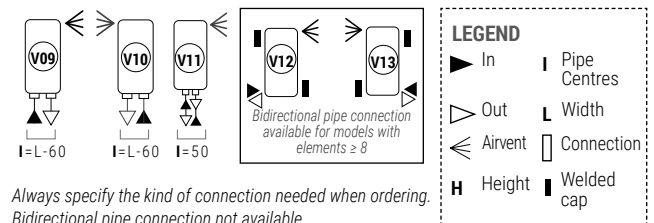

Quotes for Kristal valves



FEATURES

P. max: 5 bar

Functioning: hot water

T. max: 110°C

Connections: n° 2 x 1/2" G - 1 x 1/8" G

HOW TO ORDER THE ROSY 70 TANDEM VERTICAL RADIATOR

Radiator model E.g.: ROSY 70 TANDEM VERTICAL	Nr of Elements E.g.: 12 elements	Height in mm Example: 1400 mm	Connection variant Example: connection V01	Color code E.g.: R01 - White	Constant value
RT70	12	140	V01	R01	A

Example of article code creation

RT70 ROSY 70 TANDEM VERTICAL
12 12 elements (see table below)
140 Height 1400 mm (see table below)
V01 Connection V01 (see next page)
R01 Color R01 - White (see color chart)
A Constant value


The article code will be:

RT70 12 140 V01 R01 A

Height H [mm]		500		558		600		658		700		800		858		958		1000	
Width L [mm]	N° El.	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]
228	3	204	382,00	224	389,00	238	393,00	258	415,00	272	429,00	306	440,00	325	442,00	357	445,00	371	458,00
304	4	272	427,00	298	436,00	318	441,00	344	464,00	363	479,00	408	491,50	433	494,50	476	498,50	495	512,50
380	5	340	472,00	373	483,00	397	489,00	430	513,00	454	529,00	510	543,00	541	547,00	596	552,00	619	567,00
456	6	407	517,00	448	530,00	476	537,00	516	562,00	544	579,00	611	594,50	649	599,50	715	605,50	742	621,50
532	7	475	562,00	522	577,00	556	585,00	602	611,00	635	629,00	713	646,00	757	652,00	834	659,00	866	676,00
608	8	543	607,00	597	624,00	635	633,00	688	660,00	726	679,00	815	697,50	866	704,50	953	712,50	990	730,50
684	9	611	652,00	671	671,00	715	681,00	774	709,00	816	729,00	917	749,00	974	757,00	1072	766,00	1113	785,00
760	10	679	697,00	746	718,00	794	729,00	860	758,00	907	779,00	1019	800,50	1082	809,50	1191	819,50	1237	839,50
836	11	747	742,00	821	765,00	873	777,00	946	807,00	998	829,00	1121	852,00	1190	862,00	1310	873,00	1361	894,00
912	12	815	787,00	895	812,00	953	825,00	1032	856,00	1088	879,00	1223	903,50	1298	914,50	1429	926,50	1484	948,50
988	13	883	832,00	970	859,00	1032	873,00	1118	905,00	1179	929,00	1325	955,00	1407	967,00	1548	980,00	1608	1.003,00

All intermediate sizes are available for widths from 3 to 13 elements and heights from 500 to 2500 mm.

Prices are referred to color WHITE R01 version and STANDARD connection.



Replacement heights are marked in grey color.

Height H [mm]		1200		1400		1600		1800		1900		2000		2200		2300		2500	
Width L [mm]	N° El.	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]
228	3	435	466,00	498	467,00	560	497,00	621	523,00	652	526,00	682	531,00	742	537,00	772	553,00	832	635,00
304	4	580	521,50	664	527,00	746	559,00	828	587,00	869	593,00	909	605,00	990	616,00	1030	638,00	1109	727,00
380	5	725	577,00	830	587,00	933	621,00	1035	651,00	1086	660,00	1137	679,00	1237	695,00	1287	723,00	1387	819,00
456	6	870	632,50	995	647,00	1120	683,00	1242	715,00	1303	727,00	1364	753,00	1484	774,00	1544	808,00	1664	911,00
532	7	1015	688,00	1161	707,00	1306	745,00	1449	779,00	1520	794,00	1591	827,00	1732	853,00	1802	893,00	1941	1.003,00
608	8	1160	743,50	1327	767,00	1493	807,00	1656	843,00	1738	861,00	1818	901,00	1979	932,00	2059	978,00	2218	1.095,00
684	9	1305	799,00	1493	827,00	1679	869,00	1863	907,00	1955	928,00	2046	975,00	2227	1.011,00	2317	1.063,00	2496	1.187,00
760	10	1450	854,50	1659	887,00	1866	931,00	2070	971,00	2172	995,00	2273	1.049,00	2474	1.090,00	2574	1.148,00	2773	1.279,00
836	11	1595	910,00	1825	947,00	2053	993,00	2277	1.035,00	2389	1.062,00	2500	1.123,00	2721	1.169,00	2831	1.233,00	3050	1.371,00
912	12	1740	965,50	1991	1.007,00	2239	1.055,00	2484	1.099,00	2606	1.129,00	2728	1.197,00	2969	1.248,00	3089	1.318,00	3328	1.463,00
988	13	1885	1.021,00	2157	1.067,00	2426	1.117,00	2691	1.163,00	2824	1.196,00	2955	1.271,00	3216	1.327,00	3346	1.403,00	3605	1.555,00

ROSY 70

TANDEM HORIZONTAL

WARRANTY 5 YEARS

new



Color: S30 Cast Iron

Width L [mm]	400	500	600	700	800	1000	1200	1400	1500
Dry Weight per element [kg]	1,60	2,01	2,38	2,74	3,11	3,85	4,58	5,32	5,65
Water content [lt]	0,520	0,654	0,761	0,869	0,979	1,190	1,405	1,619	1,699
Element surface [m ²]	0,144	0,181	0,213	0,245	0,278	0,343	0,407	0,472	0,500
Pipe Centres I [mm] (H1 only)	342	442	542	642	742	942	1142	1342	1442

For output at different ΔT , please refer to the following formula: **desired output = output at ΔT 50 x (Desired $\Delta T/50$)ⁿ**

Width L [mm]	1600	1700	1800	1900	2000	2200	2300	2500
Dry Weight per element [kg]	6,05	6,38	6,79	7,16	7,52	8,26	8,63	9,36
Water content [lt]	1,833	1,913	2,048	2,155	2,262	2,477	2,589	2,798
Element surface [m ²]	0,537	0,565	0,602	0,634	0,667	0,731	0,769	0,829
Pipe Centres I [mm] (H1 only)	1542	1642	1742	1842	1942	2142	2242	2442

AVAILABLE ACCESSORIES



Kristal valve Total Color,
angled with thermostatic
option, colored

Complete list, codes, prices, and details of the Accessories from page 68.

MATERIAL:

- Ø 30 mm vertical collectors in painted mild steel.
- 70x11 mm double row of horizontal heating elements in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

Cardboard angular and profiles protected by a recyclable film in polyethylene. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).


COLORS:

See color chart on pages 2 and 3.


CERTIFICATES



STANDARD CONNECTIONS WITHOUT SURCHARGE




SPECIAL CONNECTIONS (SURCHARGE € 62,00)




LEGEND

- ▶ In Pipe Centres
- ◀ Out L Width
- ≡ Airvent Connection
- H Height Welded cap

Always specify the kind of connection needed when ordering.
Bidirectional pipe connection not available.

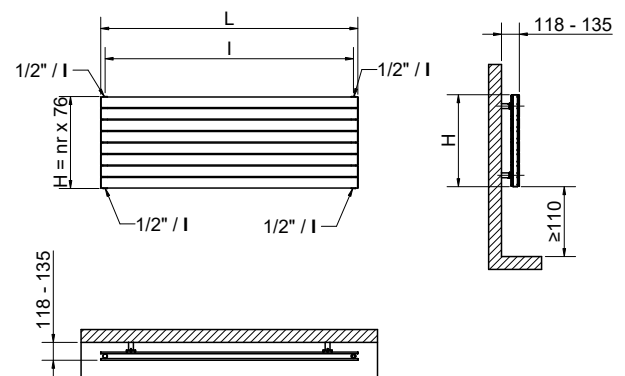

Quotes for Kristal valves



FEATURES

P. max: 5 bar

Functioning: hot water

T. max: 110°C

Connections: n° 2 x 1/2" G - 1 x 1/2" G

HOW TO ORDER THE ROSY 70 TANDEM HORIZONTAL RADIATOR

Radiator model E.g.: ROSY 70 TANDEM HORIZONTAL	Nr of Elements E.g.: 12 elements	Width in mm Example: 1500 mm	Connection variant Example: connection H01	Color code E.g.: R01 - White	Constant value
RT70	12	150	H01	R01	A

Example of article code creation

RT70 ROSY 70 TANDEM Horizontal
12 12 elements (see table below)
150 Width 1500 mm (see table below)
H01 Connection H01 (see next page)
R01 Color R01 - White (see color chart)
A Constant value

The article code will be:

RT70 12 150 H01 R01 A

Width L [mm]		400		500		600		700		800		1000		1200		1400		1500		OUTPUT PER LINEAR METER		Exp. n
Height H [mm]	N° El.	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt=30°C		
228	3	183	380,00	229	382,00	275	393,00	321	429,00	367	440,00	458	458,00	550	466,00	641	467,00	687	487,00	248		1,2026
304	4	229	424,00	286	427,00	343	441,00	401	479,00	458	491,50	572	512,50	687	521,50	801	527,00	858	548,00	310		1,2029
380	5	273	468,00	342	472,00	410	489,00	478	529,00	547	543,00	683	567,00	820	577,00	956	587,00	1025	609,00	370		1,2032
456	6	317	512,00	396	517,00	476	537,00	555	579,00	634	594,50	793	621,50	951	632,50	1110	647,00	1189	670,00	429		1,2035
532	7	361	556,00	451	562,00	541	585,00	631	629,00	721	646,00	902	676,00	1082	688,00	1263	707,00	1353	731,00	488		1,2038
608	8	405	600,00	506	607,00	607	633,00	708	679,00	809	697,50	1011	730,50	1214	743,50	1416	767,00	1517	792,00	547		1,2041
684	9	449	644,00	561	652,00	673	681,00	785	729,00	897	749,00	1122	785,00	1346	799,00	1570	827,00	1682	853,00	603		1,2156
760	10	493	688,00	617	697,00	740	729,00	863	779,00	987	800,50	1233	839,50	1480	854,50	1726	887,00	1850	914,00	659		1,2270
836	11	539	732,00	673	742,00	808	777,00	942	829,00	1077	852,00	1346	894,00	1616	910,00	1885	947,00	2020	975,00	715		1,2385
912	12	585	776,00	731	787,00	877	825,00	1023	879,00	1169	903,50	1462	948,50	1754	965,50	2046	1.007,00	2192	1.036,00	772		1,2500
988	13	632	820,00	789	832,00	947	873,00	1105	929,00	1263	955,00	1579	1.003,00	1895	1.021,00	2210	1.067,00	2368	1.097,00	829		1,2615

All intermediate sizes for heights from 3 a 13 elements and widths from 400 to 2500 mm.

Prices are referred to color WHITE R01 version and STANDARD connection.

Width L [mm]		1600		1700		1800		1900		2000		2200		2300		2500		OUTPUT PER LINEAR METER		Exp. n
Height H [mm]	N° El.	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt 50°C	Price [€]	Watt Δt=30°C		
228	3	733	497,00	779	517,00	825	523,00	871	526,00	916	531,00	1008	537,00	1054	553,00	1146	635,00	248		1,2026
304	4	916	559,00	973	580,00	1030	587,00	1087	593,00	1145	605,00	1259	616,00	1316	638,00	1431	727,00	310		1,2029
380	5	1093	621,00	1161	643,00	1230	651,00	1298	660,00	1366	679,00	1503	695,00	1571	723,00	1708	819,00	370		1,2032
456	6	1268	683,00	1348	706,00	1427	715,00	1506	727,00	1585	753,00	1744	774,00	1823	808,00	1982	911,00	429		1,2035
532	7	1443	745,00	1533	769,00	1623	779,00	1713	794,00	1804	827,00	1984	853,00	2074	893,00	2255	1.003,00	488		1,2038
608	8	1618	807,00	1719	832,00	1820	843,00	1921	861,00	2023	901,00	2225	932,00	2326	978,00	2528	1.095,00	547		1,2041
684	9	1795	869,00	1907	895,00	2019	907,00	2131	928,00	2243	975,00	2468	1.011,00	2580	1.063,00	2804	1.187,00	603		1,2156
760	10	1973	931,00	2096	958,00	2220	971,00	2343	995,00	2466	1.049,00	2713	1.090,00	2836	1.148,00	3083	1.279,00	659		1,2270
836	11	2154	993,00	2289	1.021,00	2424	1.035,00	2558	1.062,00	2693	1.123,00	2962	1.169,00	3097	1.233,00	3366	1.371,00	715		1,2385
912	12	2338	1.055,00	2485	1.084,00	2631	1.099,00	2777	1.129,00	2923	1.197,00	3215	1.248,00	3361	1.318,00	3654	1.463,00	772		1,2500
988	13	2526	1.117,00	2684	1.147,00	2842	1.163,00	3000	1.196,00	3158	1.271,00	3473	1.327,00	3631	1.403,00	3947	1.555,00	829		1,2615

ELECTRIC RADIATORS **WI-FI & SMART HOME**





TOWEL RAILS &
LIVING RADIATORS

ELECTRIC RADIATORS
WI-FI & SMART HOME

ACCESSORIES

ALESSANDRA CL 50 ELECTRIC



WITH WI-FI TECH DIGITAL THERMOSTAT

WITH ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS

new



Color: S23 Jazz Brass

FEATURES

Class protection: CLASS 1

Minimum ingress protection: IP 54 (Home automation)

Minimum ingress protection: IP 24 (Wi-Fi Tech digital thermostat)

Power supply: 230 Vac 50Hz (Home automation)

Power supply: 230 Vac 50Hz (Wi-Fi Tech digital thermostat)

Seasonal energy efficiency η_s : 49,5% (Wi-Fi Tech digital thermostat)

MATERIAL:

- Ø 30 mm collectors in painted mild steel.
- 50x10 mm horizontal heating elements in painted mild steel.
- Heat transfer fluid.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by recyclable cardboard box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart on pages 2 and 3.

ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS VERSION, WITHOUT PLUG:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable in White R01 for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Grey with chrome cap for all remaining colors.


VERSION WITH CABLE COVER:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable.
- Painted metal cable cover in matching radiator color.

VERSION WITH WI-FI TECH THERMOSTAT:

- Immersed electric heating element; regulation by a built-in Wi-Fi room chronothermostat.
- Thermostat finish: WHITE for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Black for radiators in R13 Black and T01 Matt Black; Chrome for all remaining colors.
- 1100 mm electric cable with Schuko plug.








HOW TO PLACE ELECTRIC RADIATORS



The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must always be installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical controls are accessible to anyone using the shower or bath.



Electric radiators for smart home systems, with a nominal thermal output greater than 250 W, must be used exclusively with a home automation management system or an external thermostat featuring control functions capable of ensuring a seasonal energy efficiency higher than 46%, as required by EU Regulation 2024/1103.

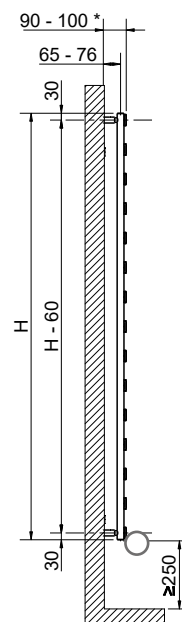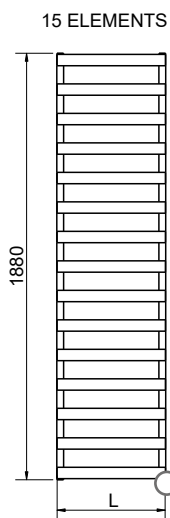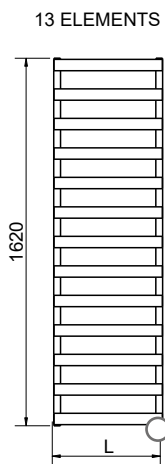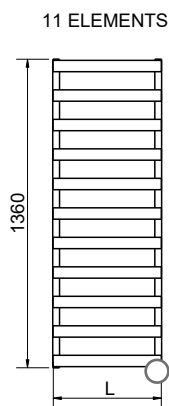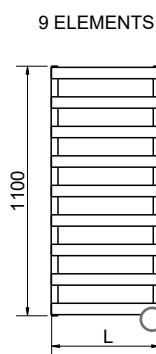

(**) Pipe center (I) measure of the fixing kit

TOWEL RAILS &
LIVING RADIATORS

ELECTRIC RADIATORS
WI-FI & SMART HOME

ACCESSORIES



CABLE COVER



* For models with cable cover, the distance from the wall is fixed at 96 mm.

ALESSANDRA CL 50 ELECTRIC FOR SMART HOME SYSTEMS WITH CABLE COVER

			CABLE COVER RIGHT				CABLE COVER LEFT					
Height	Width	Fixing kit center distance	Art. nr.	Price [€]			Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	I [mm] (**)	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
840	480	450	3581426100402	520,00	620,00	670,00	3581426100397	520,00	620,00	670,00	300	8,5
1100	480	450	3581426100403	563,00	663,00	713,00	3581426100398	563,00	663,00	713,00	400	10,7
1360	480	450	3581426100404	595,00	695,00	745,00	3581426100399	595,00	695,00	745,00	500	12,8
1620	480	450	3581426100405	632,00	732,00	782,00	3581426100400	632,00	732,00	782,00	600	15,0
1880	480	450	3581426100406	648,00	748,00	798,00	3581426100401	648,00	748,00	798,00	700	17,1





HEATING ELEMENT WITHOUT PLUG



ALESSANDRA CL 50 ELECTRIC FOR SMART HOME SYSTEMS

			HEATING ELEMENT WITHOUT PLUG RIGHT				HEATING ELEMENT WITHOUT PLUG LEFT					
Height	Width	Fixing kit center distance	Art. nr.	Price [€]			Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	I [mm] (**)	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
840	480	450	3581426100392	470,00	570,00	620,00	3581426100387	470,00	570,00	620,00	300	8,5
1100	480	450	3581426100393	513,00	613,00	663,00	3581426100388	513,00	613,00	663,00	400	10,7
1360	480	450	3581426100394	545,00	645,00	695,00	3581426100389	545,00	645,00	695,00	500	12,8
1620	480	450	3581426100395	582,00	682,00	732,00	3581426100390	582,00	682,00	732,00	600	15,0
1880	480	450	3581426100396	598,00	698,00	748,00	3581426100391	598,00	698,00	748,00	700	17,1





WI-FI TECH DIGITAL THERMOSTAT



ALESSANDRA CL 50 ELECTRIC WITH WI-FI TECH DIGITAL THERMOSTAT

			WI-FI TECH DIGITAL THERMOSTAT RIGHT				WI-FI TECH DIGITAL THERMOSTAT LEFT					
Height	Width	Fixing kit center distance	Art. nr.	Price [€]			Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	I [mm] (**)	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
840	480	450	3581426100412	617,00	717,00	767,00	3581426100407	617,00	717,00	767,00	300	8,5
1100	480	450	3581426100413	660,00	760,00	810,00	3581426100408	660,00	760,00	810,00	400	10,7
1360	480	450	3581426100414	692,00	792,00	842,00	3581426100409	692,00	792,00	842,00	500	12,8
1620	480	450	3581426100415	729,00	829,00	879,00	3581426100410	729,00	829,00	879,00	600	15,0
1880	480	450	3581426100416	745,00	845,00	895,00	3581426100411	745,00	845,00	895,00	700	17,1



The codes shown in the table refer to the R01 White color models.

ALESSANDRA CL 70 ELECTRIC



WITH WI-FI TECH DIGITAL THERMOSTAT

WITH ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS

new



Color: T24 Nabuk

FEATURES

Class protection: CLASS 1

Minimum ingress protection: IP 54 (Home automation)

Minimum ingress protection: IP 24 (Wi-Fi Tech digital thermostat)

Power supply: 230 Vac 50Hz (Home automation)

Power supply: 230 Vac 50Hz (Wi-Fi Tech digital thermostat)

Seasonal energy efficiency η_s : 49,5% (Wi-Fi Tech digital thermostat)

MATERIAL:

- Ø 38 mm collectors in painted mild steel.
- 70x11 mm horizontal heating elements in painted mild steel.
- Heat transfer fluid.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by recyclable cardboard box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart on pages 2 and 3.

ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS VERSION, WITHOUT PLUG:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable in White R01 for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Grey with chrome cap for all remaining colors.


VERSION WITH CABLE COVER:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable.
- Painted metal cable cover in matching radiator color.

VERSION WITH WI-FI TECH THERMOSTAT:

- Immersed electric heating element; regulation by a built-in Wi-Fi room chronothermostat.
- Thermostat finish: White for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Black for radiators in R13 Black and T01 Matt Black; Chrome for all remaining colors.
- 1100 mm electric cable with Schuko plug.


HOW TO PLACE ELECTRIC RADIATORS




The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must always be installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical controls are accessible to anyone using the shower or bath.




Electric radiators for smart home systems, with a nominal thermal output greater than 250 W, must be used exclusively with a home automation management system or an external thermostat featuring control functions capable of ensuring a seasonal energy efficiency higher than 46%, as required by EU Regulation 2024/1103.




5 ELEMENTS




7 ELEMENTS





8 ELEMENTS

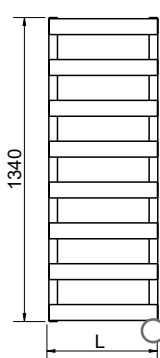

9 ELEMENTS

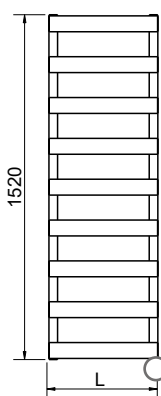

10 ELEMENTS

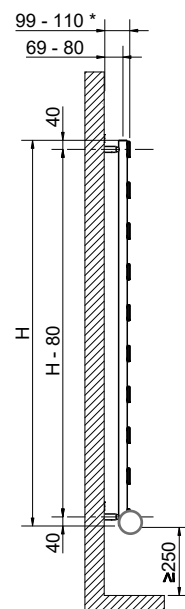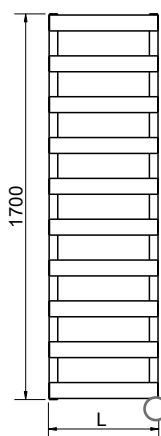

(**) Pipe center (l) measure of the fixing kit



CABLE COVER



* For models with cable cover, the distance from the wall is fixed at 101 mm.

ALESSANDRA CL 70 ELECTRIC FOR SMART HOME SYSTEMS WITH CABLE COVER

			CABLE COVER RIGHT				CABLE COVER LEFT					
Height	Width	Fixing kit center distance	Art. nr.	Price [€]			Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	I [mm] (**)	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
800	480	442	3581426100372	503,00	603,00	653,00	3581426100367	503,00	603,00	653,00	300	10,2
1160	480	442	3581426100373	564,00	664,00	714,00	3581426100368	564,00	664,00	714,00	400	14,0
1340	480	442	3581426100374	594,00	694,00	744,00	3581426100369	594,00	694,00	744,00	500	15,9
1520	480	442	3581426100375	610,00	710,00	760,00	3581426100370	610,00	710,00	760,00	600	17,8
1700	480	442	3581426100376	629,00	729,00	779,00	3581426100371	629,00	729,00	779,00	600	19,7





HEATING ELEMENT WITHOUT PLUG



ALESSANDRA CL 70 ELECTRIC FOR SMART HOME SYSTEMS

			HEATING ELEMENT WITHOUT PLUG RIGHT				HEATING ELEMENT WITHOUT PLUG LEFT					
Height	Width	Fixing kit center distance	Art. nr.	Price [€]			Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	I [mm] (**)	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
800	480	442	3581426100362	453,00	553,00	603,00	3581426100357	453,00	553,00	603,00	300	10,2
1160	480	442	3581426100363	514,00	614,00	664,00	3581426100358	514,00	614,00	664,00	400	14,0
1340	480	442	3581426100364	544,00	644,00	694,00	3581426100359	544,00	644,00	694,00	500	15,9
1520	480	442	3581426100365	560,00	660,00	710,00	3581426100360	560,00	660,00	710,00	600	17,8
1700	480	442	3581426100366	579,00	679,00	729,00	3581426100361	579,00	679,00	729,00	600	19,7





WI-FI TECH DIGITAL THERMOSTAT



ALESSANDRA CL 70 ELECTRIC WITH WI-FI TECH DIGITAL THERMOSTAT

			WI-FI TECH DIGITAL THERMOSTAT RIGHT				WI-FI TECH DIGITAL THERMOSTAT LEFT					
Height	Width	Fixing kit center distance	Art. nr.	Price [€]			Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	I [mm] (**)	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
800	480	442	3581426100382	600,00	700,00	750,00	3581426100377	600,00	700,00	750,00	300	10,2
1160	480	442	3581426100383	661,00	761,00	811,00	3581426100378	661,00	761,00	811,00	400	14,0
1340	480	442	3581426100384	691,00	791,00	841,00	3581426100379	691,00	791,00	841,00	500	15,9
1520	480	442	3581426100385	707,00	807,00	857,00	3581426100380	707,00	807,00	857,00	600	17,8
1700	480	442	3581426100386	726,00	826,00	876,00	3581426100381	726,00	826,00	876,00	600	19,7



The codes shown in the table refer to the R01 White color models.

LAURA CL 22 ELECTRIC



WITH WI-FI TECH DIGITAL THERMOSTAT

WITH ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS

new



Color: T01 Matt Black

FEATURES

Class protection: CLASS 1
Minimum ingress protection: IP 54 (Home automation)
Minimum ingress protection: IP 24 (Wi-Fi Tech digital thermostat)
Power supply: 230 Vac 50Hz (Home automation)
Power supply: 230 Vac 50Hz (Wi-Fi Tech digital thermostat)
Seasonal energy efficiency η_s : 49,5% (Wi-Fi Tech digital thermostat)

MATERIAL:

- Ø 30 mm collectors in painted mild steel.
- Ø 22 mm horizontal heating elements in painted mild steel.
- Heat transfer fluid.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by recyclable cardboard box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart on pages 2 and 3.

ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS VERSION, WITHOUT PLUG:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable in White R01 for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Grey with chrome cap for all remaining colors.


VERSION WITH CABLE COVER:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable.
- Painted metal cable cover in matching radiator color.

VERSION WITH WI-FI TECH THERMOSTAT:

- Immersed electric heating element; regulation by a built-in Wi-Fi room chronothermostat.
- Thermostat finish: WHITE for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Black for radiators in R13 Black and T01 Matt Black; Chrome for all remaining colors.
- 1100 mm electric cable with Schuko plug.








HOW TO PLACE ELECTRIC RADIATORS



The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must always be installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical controls are accessible to anyone using the shower or bath.



Electric radiators for smart home systems, with a nominal thermal output greater than 250 W, must be used exclusively with a home automation management system or an external thermostat featuring control functions capable of ensuring a seasonal energy efficiency higher than 46%, as required by EU Regulation 2024/1103.

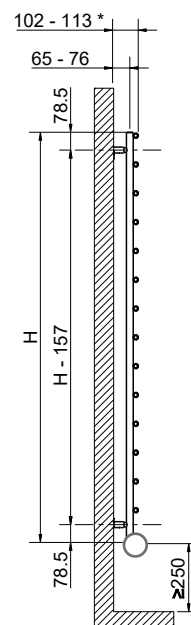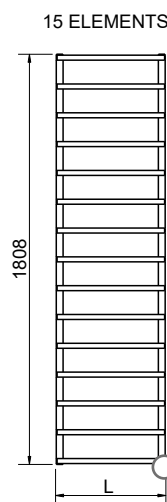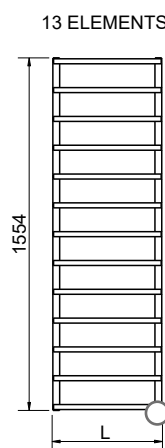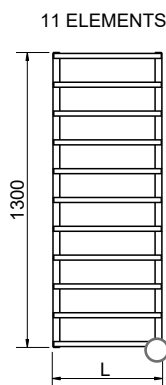

(**) Pipe center (l) measure of the fixing kit



CABLE COVER



* For models with cable cover, the distance from the wall is fixed at 108 mm.

LAURA CL 22 ELECTRIC FOR SMART HOME SYSTEMS WITH CABLE COVER

Height	Width	Fixing kit center distance	CABLE COVER RIGHT				CABLE COVER LEFT				Output	Weight
			Art. nr.	Price [€]	Price [€]	Price [€]	Art. nr.	Price [€]	Price [€]	Price [€]		
[mm]	L [mm]	l [mm] (**)	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
792	480	450	3581666110034	408,00	508,00	558,00	3581666110029	408,00	508,00	558,00	300	6,6
1046	480	450	3581666110035	453,00	553,00	603,00	3581666110030	453,00	553,00	603,00	300	8,2
1300	480	450	3581666110036	474,00	574,00	624,00	3581666110031	474,00	574,00	624,00	400	9,8
1554	480	450	3581666110037	497,00	597,00	647,00	3581666110032	497,00	597,00	647,00	500	11,4
1808	480	450	3581666110038	524,00	624,00	674,00	3581666110033	524,00	624,00	674,00	600	13,1





HEATING ELEMENT WITHOUT PLUG



LAURA CL 22 ELECTRIC FOR SMART HOME SYSTEMS

Height	Width	Fixing kit center distance	HEATING ELEMENT WITHOUT PLUG RIGHT				HEATING ELEMENT WITHOUT PLUG LEFT				Output	Weight
			Art. nr.	Price [€]	Price [€]	Price [€]	Art. nr.	Price [€]	Price [€]	Price [€]		
[mm]	L [mm]	l [mm] (**)	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
792	480	450	3581666110024	358,00	458,00	508,00	3581666110019	358,00	458,00	508,00	300	6,6
1046	480	450	3581666110025	403,00	503,00	553,00	3581666110020	403,00	503,00	553,00	300	8,2
1300	480	450	3581666110026	424,00	524,00	574,00	3581666110021	424,00	524,00	574,00	400	9,8
1554	480	450	3581666110027	447,00	547,00	597,00	3581666110022	447,00	547,00	597,00	500	11,4
1808	480	450	3581666110028	474,00	574,00	624,00	3581666110023	474,00	574,00	624,00	600	13,1





WI-FI TECH DIGITAL THERMOSTAT



LAURA CL 22 ELECTRIC WITH WI-FI TECH DIGITAL THERMOSTAT

Height	Width	Fixing kit center distance	WI-FI TECH DIGITAL THERMOSTAT RIGHT				WI-FI TECH DIGITAL THERMOSTAT LEFT				Output	Weight
			Art. nr.	Price [€]	Price [€]	Price [€]	Art. nr.	Price [€]	Price [€]	Price [€]		
[mm]	L [mm]	l [mm] (**)	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
792	480	450	3581666110044	505,00	605,00	655,00	3581666110039	505,00	605,00	655,00	300	6,6
1046	480	450	3581666110045	550,00	650,00	700,00	3581666110040	550,00	650,00	700,00	300	8,2
1300	480	450	3581666110046	571,00	671,00	721,00	3581666110041	571,00	671,00	721,00	400	9,8
1554	480	450	3581666110047	594,00	694,00	744,00	3581666110042	594,00	694,00	744,00	500	11,4
1808	480	450	3581666110048	621,00	721,00	771,00	3581666110043	621,00	721,00	771,00	600	13,1



The codes shown in the table refer to the R01 White color models.

WITH ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS



Color: S27 Virginia Leaf

FEATURES

Class protection: CLASS 1

Minimum ingress protection: IP 54 (Home automation)

Power supply: 230 Vac 50Hz (Home automation)

MATERIAL:

- 30x40 mm vertical collectors in painted mild steel.
- Ø 25 mm horizontal heating elements in painted mild steel.
- Heat transfer fluid.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by recyclable cardboard box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart on pages 2 and 3.

ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS VERSION, WITHOUT PLUG:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable in WHITE R01 for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Grey with chrome cap for all remaining colors.

VERSION WITH CABLE COVER:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable without plug.
- Painted metal cable cover in matching radiator color.




Radiator

☒ REVERSIBLE

The Claudia Electric radiator can be installed with the heating element on the right or left side, as required.

HOW TO PLACE ELECTRIC RADIATORS



The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must always be installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical controls are accessible to anyone using the shower or bath.



Electric radiators for smart home systems, with a nominal thermal output greater than 250 W, must be used exclusively with a home automation management system or an external thermostat featuring control functions capable of ensuring a seasonal energy efficiency higher than 46%, as required by EU Regulation 2024/1103.

AVAILABLE ACCESSORIES


Complete list, codes, prices, and details of the accessories from page 68.




Kit 2 colored hooks




Towel bar in painted mild steel




19 ELEMENTS





29 ELEMENTS



35 ELEMENTS

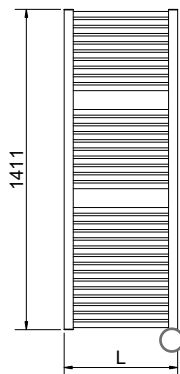

44 ELEMENTS

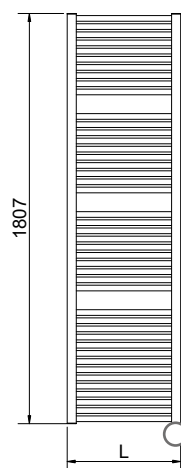


CABLE COVER



* For models with cable cover, the distance from the wall is fixed at 78 mm.

CLAUDIA® ELECTRIC FOR SMART HOME SYSTEMS WITH CABLE COVER

		CABLE COVER RIGHT/LEFT					
Height	Width	Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
763	400	3581356100230	325,50	425,50	475,50	400	11
	500	3581356100231	326,55	426,55	476,55	500	13
	600	3581356100232	342,30	442,30	492,30	600	15
1195	400	3581356100233	376,95	476,95	526,95	600	16
	450	3581356100234	389,55	489,55	539,55	600	17
	500	3581356100235	395,85	495,85	545,85	700	19
1411	600	3581356100236	411,60	511,60	561,60	900	21
	400	3581356100237	409,50	509,50	559,50	700	19
	500	3581356100238	420,00	520,00	570,00	900	22
1807	600	3581356100239	431,55	531,55	581,55	900	25
	400	3581356100240	441,00	541,00	591,00	900	23
	500	3581356100241	472,50	572,50	622,50	900	27
	600	3581356100242	527,10	627,10	677,10	1200	31




HEATING ELEMENT WITHOUT PLUG



CLAUDIA® ELECTRIC FOR SMART HOME SYSTEMS

		HEATING ELEMENT WITHOUT PLUG RIGHT/LEFT					
Height	Width	Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
763	400	3581356100204	273,00	373,00	423,00	400	11
	500	3581356100205	274,05	374,05	424,05	500	13
	600	3581356100206	289,80	389,80	439,80	600	15
1195	400	3581356100207	324,45	424,45	474,45	600	16
	450	3581356100208	337,05	437,05	487,05	600	17
	500	3581356100209	343,35	443,35	493,35	700	19
1411	600	3581356100210	359,10	459,10	509,10	900	21
	400	3581356100211	357,00	457,00	507,00	700	19
	500	3581356100212	367,50	467,50	517,50	900	22
1807	600	3581356100213	379,05	479,05	529,05	900	25
	400	3581356100214	388,50	488,50	538,50	900	23
	500	3581356100215	420,00	520,00	570,00	900	27
	600	3581356100216	474,60	574,60	624,60	1200	31



The codes shown in the table refer to the R01 White color models.

WITH WI-FI TECH DIGITAL THERMOSTAT



Color: F53 Silver Look

FEATURES

Class protection: CLASS 1

Minimum ingress protection: IP 24 (Wi-Fi Tech digital thermostat)

Power supply: 230 Vac 50Hz (Wi-Fi Tech digital thermostat)

Seasonal energy efficiency η_s : 49,5% (Wi-Fi Tech digital thermostat)

MATERIAL:

- 30x40 mm vertical collectors in painted mild steel.
- Ø 25 mm horizontal heating elements in painted mild steel.
- Heat transfer fluid.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by recyclable cardboard box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart on pages 2 and 3.


VERSION WITH WI-FI TECH THERMOSTAT:

- Immersed electric heating element; regulation by a built-in Wi-Fi room chronothermostat.
- Thermostat finish: WHITE for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Black for radiators in R13 Black and T01 Matt Black; Chrome for all remaining colors.
- 1100 mm electric cable with Schuko plug.



For other thermostat models available, please refer to the "Cordivari Radiators and Towel Rails" price list catalogue.

HOW TO PLACE ELECTRIC RADIATORS



The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must always be installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical controls are accessible to anyone using the shower or bath.



Electric radiators for smart home systems, with a nominal thermal output greater than 250 W, must be used exclusively with a home automation management system or an external thermostat featuring control functions capable of ensuring a seasonal energy efficiency higher than 46%, as required by EU Regulation 2024/1103.

AVAILABLE ACCESSORIES







Complete list, codes, prices, and details of the accessories from page 68.



Kit 2 colored hooks





Towel bar in painted mild steel

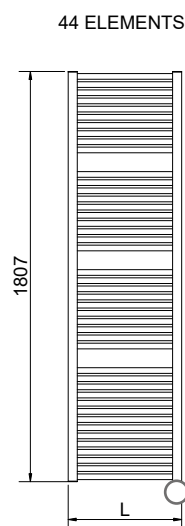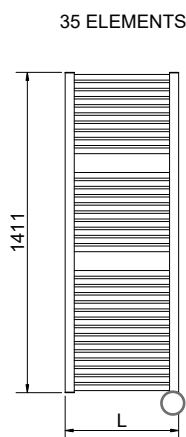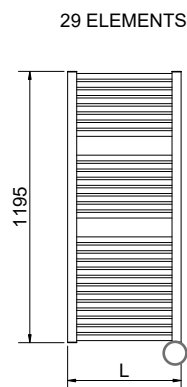

CLAUDIA® ELECTRIC WITH WI-FI TECH DIGITAL THERMOSTAT

		WI-FI TECH DIGITAL THERMOSTAT RIGHT				WI-FI TECH DIGITAL THERMOSTAT LEFT					
Height	Width	Art. nr.	Price [€]			Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]		R01 White	CLASSIC Color	SPECIAL Color		R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
763	400	3581356100269	437,85	537,85	587,85	3581356100256	437,85	537,85	587,85	400	11
	500	3581356100270	438,90	538,90	588,90	3581356100257	438,90	538,90	588,90	500	13
	600	3581356100271	454,65	554,65	604,65	3581356100258	454,65	554,65	604,65	600	15
1195	400	3581356100272	489,30	589,30	639,30	3581356100259	489,30	589,30	639,30	600	16
	450	3581356100273	501,90	601,90	651,90	3581356100260	501,90	601,90	651,90	600	17
	500	3581356100274	508,20	608,20	658,20	3581356100261	508,20	608,20	658,20	700	19
1411	600	3581356100275	523,95	623,95	673,95	3581356100262	523,95	623,95	673,95	900	21
	400	3581356100276	521,85	621,85	671,85	3581356100263	521,85	621,85	671,85	700	19
	500	3581356100277	532,35	632,35	682,35	3581356100264	532,35	632,35	682,35	900	22
1807	600	3581356100278	543,90	643,90	693,90	3581356100265	543,90	643,90	693,90	900	25
	400	3581356100279	553,35	653,35	703,35	3581356100266	553,35	653,35	703,35	900	23
	500	3581356100280	584,85	684,85	734,85	3581356100267	584,85	684,85	734,85	900	27
	600	3581356100281	639,45	739,45	789,45	3581356100268	639,45	739,45	789,45	1200	31



NAIKE ST ELECTRIC



WITH WI-FI TECH DIGITAL THERMOSTAT

WITH ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS



Color: F34 Red Sand

FEATURES

Class protection: CLASS 1

Minimum ingress protection: IP 54 (Home automation)

Minimum ingress protection: IP 24 (Wi-Fi Tech digital thermostat)

Power supply: 230 Vac 50Hz (Home automation)

Power supply: 230 Vac 50Hz (Wi-Fi Tech digital thermostat)

Seasonal energy efficiency η_s : 49,5% (Wi-Fi Tech digital thermostat)

MATERIAL:

- 30x30 mm collectors in painted mild steel.
- 15x20 mm horizontal heating elements in painted mild steel.
- Heat transfer fluid.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by recyclable cardboard box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart on pages 2 and 3.

ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS VERSION, WITHOUT PLUG:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable in White R01 for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Grey with chrome cap for all remaining colors.

VERSION WITH CABLE COVER:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable.
- Painted metal cable cover in matching radiator color.


VERSION WITH WI-FI TECH THERMOSTAT:

- Immersed electric heating element; regulation by a built-in Wi-Fi room chronothermostat.
- Thermostat finish: WHITE for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Black for radiators in R13 Black and T01 Matt Black; Chrome for all remaining colors.
- 1100 mm electric cable with Schuko plug.



For other thermostat models available, please refer to the "Cordivari Radiators and Towel Rails" price list catalogue.







HOW TO PLACE ELECTRIC RADIATORS



The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must always be installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical controls are accessible to anyone using the shower or bath.



Electric radiators for smart home systems, with a nominal thermal output greater than 250 W, must be used exclusively with a home automation management system or an external thermostat featuring control functions capable of ensuring a seasonal energy efficiency higher than 46%, as required by EU Regulation 2024/1103.

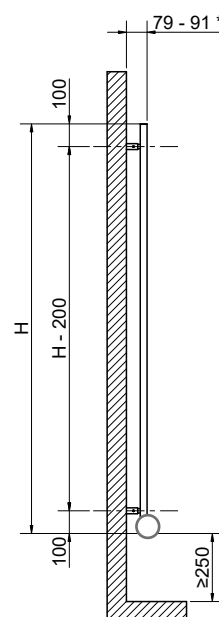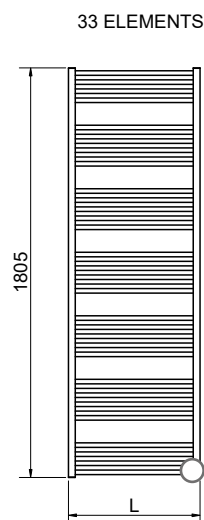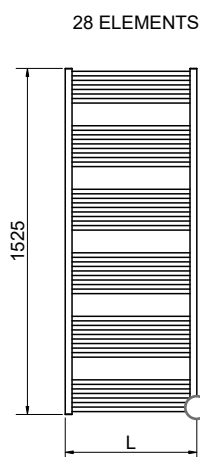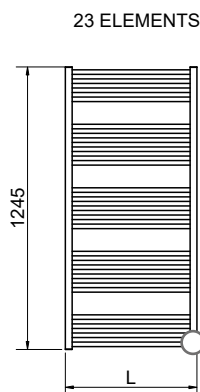

(**) Pipe center (l) measure of the fixing kit



CABLE COVER



* For models with cable cover, the distance from the wall is fixed at 86 mm.

NAIKE ST ELECTRIC FOR SMART HOME SYSTEMS WITH CABLE COVER

			CABLE COVER RIGHT				CABLE COVER LEFT					
Height	Width	Fixing kit center distance	Art. nr.	Price [€]			Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	I [mm] (**)	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
965	580	550	3581826100034	452,55	552,55	602,55	3581826100030	452,55	552,55	602,55	500	10,5
1245	580	550	3581826100035	579,60	679,60	729,60	3581826100031	579,60	679,60	729,60	600	13,1
1525	580	550	3581826100036	722,40	822,40	872,40	3581826100032	722,40	822,40	872,40	700	16,2
1805	580	550	3581826100037	857,85	957,85	1.007,85	3581826100033	857,85	957,85	1.007,85	900	18,7





HEATING ELEMENT WITHOUT PLUG





NAIKE ST ELECTRIC FOR SMART HOME SYSTEMS

			HEATING ELEMENT WITHOUT PLUG RIGHT				HEATING ELEMENT WITHOUT PLUG LEFT					
Height	Width	Fixing kit center distance	Art. nr.	Price [€]			Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	I [mm] (**)	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
965	580	550	3581826100026	400,05	500,05	550,05	3581826100022	400,05	500,05	550,05	500	10,5
1245	580	550	3581826100027	527,10	627,10	677,10	3581826100023	527,10	627,10	677,10	600	13,1
1525	580	550	3581826100028	669,90	769,90	819,90	3581826100024	669,90	769,90	819,90	700	16,2
1805	580	550	3581826100029	805,35	905,35	955,35	3581826100025	805,35	905,35	955,35	900	18,7

WI-FI TECH
DIGITAL THERMOSTAT

NAIKE ST ELECTRIC WITH WI-FI TECH DIGITAL THERMOSTAT

			WI-FI TECH DIGITAL THERMOSTAT RIGHT				WI-FI TECH DIGITAL THERMOSTAT LEFT					
Height	Width	Fixing kit center distance	Art. nr.	Price [€]			Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	I [mm] (**)	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
965	580	550	3581826100042	543,90	643,90	693,90	3581826100038	543,90	643,90	693,90	500	10,5
1245	580	550	3581826100043	670,95	770,95	820,95	3581826100039	670,95	770,95	820,95	600	13,1
1525	580	550	3581826100044	813,75	913,75	963,75	3581826100040	813,75	913,75	963,75	700	16,2
1805	580	550	3581826100045	949,20	1.049,20	1.099,20	3581826100041	949,20	1.049,20	1.099,20	900	18,7



The codes shown in the table refer to the R01 White color models.

LUCY 18 ELECTRIC



WITH WI-FI TECH DIGITAL THERMOSTAT

WITH ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS



Color: T17 Acai Matt

FEATURES

Class protection: CLASS 1

Minimum ingress protection: IP 54 (Home automation)

Minimum ingress protection: IP 24 (Wi-Fi Tech digital thermostat)

Power supply: 230 Vac 50Hz (Home automation)

Power supply: 230 Vac 50Hz (Wi-Fi Tech digital thermostat)

Seasonal energy efficiency η_s : 49,5% (Wi-Fi Tech digital thermostat)

MATERIAL:

- Ø 30 mm collectors in painted mild steel.
- Ø 18 mm horizontal heating elements in painted mild steel.
- Heat transfer fluid.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by recyclable cardboard box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart on pages 2 and 3.

ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS VERSION, WITHOUT PLUG:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable in White R01 for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Grey with chrome cap for all remaining colors.

VERSION WITH CABLE COVER:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable.
- Painted metal cable cover in matching radiator color.


VERSION WITH WI-FI TECH THERMOSTAT:

- Immersed electric heating element; regulation by a built-in Wi-Fi room chronothermostat.
- Thermostat finish: White for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Black for radiators in R13 Black and T01 Matt Black; Chrome for all remaining colors.
- 1100 mm electric cable with Schuko plug.



For other thermostat models available, please refer to the "Cordivari Radiators and Towel Rails" price list catalogue.

HOW TO PLACE ELECTRIC RADIATORS



The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must always be installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical controls are accessible to anyone using the shower or bath.



Electric radiators for smart home systems, with a nominal thermal output greater than 250 W, must be used exclusively with a home automation management system or an external thermostat featuring control functions capable of ensuring a seasonal energy efficiency higher than 46%, as required by EU Regulation 2024/1103.

AVAILABLE ACCESSORIES







Complete list, codes, prices, and details of the accessories from page 68.



Kit 2 colored hooks



Towel bar in painted mild steel

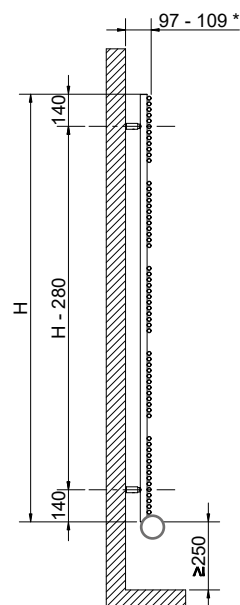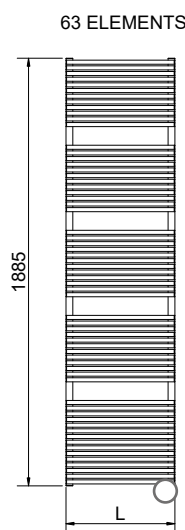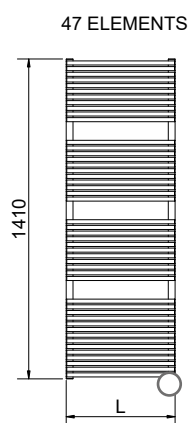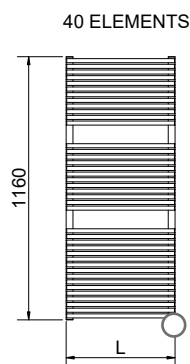

(**) Pipe center (l) measure of the fixing kit



CABLE COVER



* For models with cable cover, the distance from the wall is fixed at 108 mm.

LUCY 18 ELECTRIC FOR SMART HOME SYSTEMS WITH CABLE COVER

			CABLE COVER RIGHT				CABLE COVER LEFT					
Height	Width	Fixing kit center distance	Art. nr.	Price [€]			Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	I [mm] (**)	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
760	480	450	3581406100264	520,80	620,80	670,80	3581406100260	520,80	620,80	670,80	500	14
1160	480	450	3581406100265	620,55	720,55	770,55	3581406100261	620,55	720,55	770,55	700	22
1410	480	450	3581406100266	688,80	788,80	838,80	3581406100262	688,80	788,80	838,80	900	26
1885	480	450	3581406100267	855,75	955,75	1.005,75	3581406100263	855,75	955,75	1.005,75	1200	30





HEATING ELEMENT WITHOUT PLUG



LUCY 18 ELECTRIC FOR SMART HOME SYSTEMS

			HEATING ELEMENT WITHOUT PLUG RIGHT				HEATING ELEMENT WITHOUT PLUG LEFT					
Height	Width	Fixing kit center distance	Art. nr.	Price [€]			Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	I [mm] (**)	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
760	480	450	3581406100256	468,30	568,30	618,30	3581406100252	468,30	568,30	618,30	500	14
1160	480	450	3581406100257	568,05	668,05	718,05	3581406100253	568,05	668,05	718,05	700	22
1410	480	450	3581406100258	636,30	736,30	786,30	3581406100254	636,30	736,30	786,30	900	26
1885	480	450	3581406100259	803,25	903,25	953,25	3581406100255	803,25	903,25	953,25	1200	30





WI-FI TECH DIGITAL THERMOSTAT



LUCY 18 ELECTRIC WITH WI-FI TECH DIGITAL THERMOSTAT

			WI-FI TECH DIGITAL THERMOSTAT RIGHT				WI-FI TECH DIGITAL THERMOSTAT LEFT					
Height	Width	Fixing kit center distance	Art. nr.	Price [€]			Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	I [mm] (**)	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
760	480	450	3581406100272	612,15	712,15	762,15	3581406100268	612,15	712,15	762,15	500	14
1160	480	450	3581406100273	711,90	811,90	861,90	3581406100269	711,90	811,90	861,90	700	22
1410	480	450	3581406100274	780,15	880,15	930,15	3581406100270	780,15	880,15	930,15	900	26
1885	480	450	3581406100275	947,10	1.047,10	1.097,10	3581406100271	947,10	1.047,10	1.097,10	1200	30



The codes shown in the table refer to the R01 White color models.

GLORIA 22 ELECTRIC



WITH WI-FI TECH DIGITAL THERMOSTAT

WITH ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS



FEATURES

Class protection: CLASS 1

Minimum ingress protection: IP 54 (Home automation)

Minimum ingress protection: IP 24 (Wi-Fi Tech digital thermostat)

Power supply: 230 Vac 50Hz (Home automation)

Power supply: 230 Vac 50Hz (Wi-Fi Tech digital thermostat)

Seasonal energy efficiency η_s : 49,5% (Wi-Fi Tech digital thermostat)

MATERIAL:

- Ø 30 mm collectors in painted mild steel.
- Ø 22 mm horizontal heating elements in painted mild steel.
- Heat transfer fluid.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by recyclable cardboard box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart on pages 2 and 3.

ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS VERSION, WITHOUT PLUG:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable in White R01 for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Grey with chrome cap for all remaining colors.

VERSION WITH CABLE COVER:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable.
- Painted metal cable cover in matching radiator color.


VERSION WITH WI-FI TECH THERMOSTAT:

- Immersed electric heating element; regulation by a built-in Wi-Fi room chronothermostat.
- Thermostat finish: WHITE for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Black for radiators in R13 Black and T01 Matt Black; Chrome for all remaining colors.
- 1100 mm electric cable with Schuko plug.



For other thermostat models available, please refer to the "Cordivari Radiators and Towel Rails" price list catalogue.







HOW TO PLACE ELECTRIC RADIATORS



The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must always be installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical controls are accessible to anyone using the shower or bath.



Electric radiators for smart home systems, with a nominal thermal output greater than 250 W, must be used exclusively with a home automation management system or an external thermostat featuring control functions capable of ensuring a seasonal energy efficiency higher than 46%, as required by EU Regulation 2024/1103.

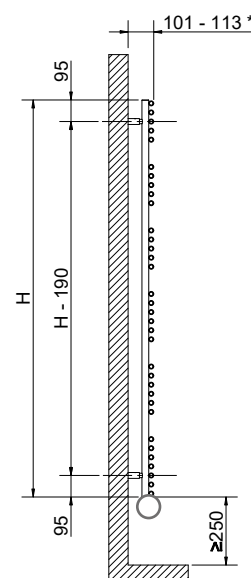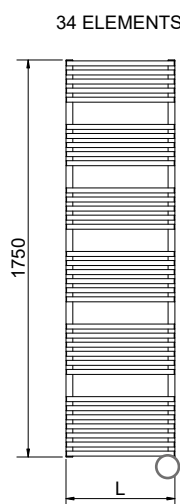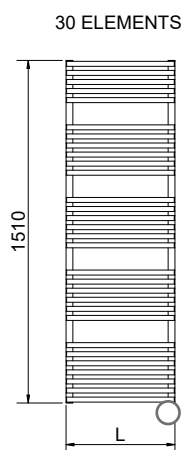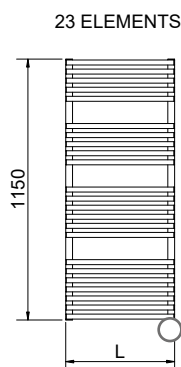

(**) Pipe center (l) measure of the fixing kit

TOWEL RAILS &
LIVING RADIATORS

ELECTRIC RADIATORS
WI-FI & SMART HOME

ACCESSORIES



CABLE COVER



* For models with cable cover, the distance from the wall is fixed at 108 mm.

GLORIA 22 ELECTRIC FOR SMART HOME SYSTEMS WITH CABLE COVER

			CABLE COVER RIGHT				CABLE COVER LEFT					
Height	Width	Fixing kit center distance	Art. nr.	Price [€]			Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	I [mm] (**)	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
790	430	400	3581666100056	472,50	572,50	622,50	3581666100052	472,50	572,50	622,50	400	10
1150	580	550	3581666100057	576,45	676,45	726,45	3581666100053	576,45	676,45	726,45	700	17
1510	580	550	3581666100058	622,65	722,65	772,65	3581666100054	622,65	722,65	772,65	900	22
1750	580	550	3581666100059	703,50	803,50	853,50	3581666100055	703,50	803,50	853,50	1200	25





HEATING ELEMENT WITHOUT PLUG



GLORIA 22 ELECTRIC FOR SMART HOME SYSTEMS

			HEATING ELEMENT WITHOUT PLUG RIGHT				HEATING ELEMENT WITHOUT PLUG LEFT					
Height	Width	Fixing kit center distance	Art. nr.	Price [€]			Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	I [mm] (**)	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
790	430	400	3581666100048	420,00	520,00	570,00	3581666100044	420,00	520,00	570,00	400	10
1150	580	550	3581666100049	523,95	623,95	673,95	3581666100045	523,95	623,95	673,95	700	17
1510	580	550	3581666100050	570,15	670,15	720,15	3581666100046	570,15	670,15	720,15	900	22
1750	580	550	3581666100051	651,00	751,00	801,00	3581666100047	651,00	751,00	801,00	1200	25





WI-FI TECH DIGITAL THERMOSTAT



GLORIA 22 ELECTRIC WITH WI-FI TECH DIGITAL THERMOSTAT

			WI-FI TECH DIGITAL THERMOSTAT RIGHT				WI-FI TECH DIGITAL THERMOSTAT LEFT					
Height	Width	Fixing kit center distance	Art. nr.	Price [€]			Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	I [mm] (**)	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
790	430	400	3581666100064	565,95	665,95	715,95	3581666100060	565,95	665,95	715,95	400	10
1150	580	550	3581666100065	669,90	769,90	819,90	3581666100061	669,90	769,90	819,90	700	17
1500	580	550	3581666100066	716,10	816,10	866,10	3581666100062	716,10	816,10	866,10	900	22
1750	580	550	3581666100067	796,95	896,95	946,95	3581666100063	796,95	896,95	946,95	1200	25



The codes shown in the table refer to the R01 White color models.

WITH WI-FI TECH DIGITAL THERMOSTAT

WITH ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS



Color: T11 Matt White

FEATURES

Class protection: CLASS 1

Minimum ingress protection: IP 54 (Home automation)

Minimum ingress protection: IP 24 (Wi-Fi Tech digital thermostat)

Power supply: 230 Vac 50Hz (Home automation)

Power supply: 230 Vac 50Hz (Wi-Fi Tech digital thermostat)

Seasonal energy efficiency η_s : 49,5% (Wi-Fi Tech digital thermostat)

MATERIAL:

- Ø 30 mm collectors in painted mild steel.
- 50x10 mm horizontal heating elements in painted mild steel.
- Heat transfer fluid.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by recyclable cardboard box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart on pages 2 and 3.

ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS VERSION, WITHOUT PLUG:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable in White R01 for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Grey with chrome cap for all remaining colors.

VERSION WITH CABLE COVER:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable.
- Painted metal cable cover in matching radiator color.


VERSION WITH WI-FI TECH THERMOSTAT:

- Immersed electric heating element; regulation by a built-in Wi-Fi room chronothermostat.
- Thermostat finish: WHITE for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Black for radiators in R13 Black and T01 Matt Black; Chrome for all remaining colors.
- 1100 mm electric cable with Schuko plug.



For other thermostat models available, please refer to the "Cordivari Radiators and Towel Rails" price list catalogue.

HOW TO PLACE ELECTRIC RADIATORS



The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must always be installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical controls are accessible to anyone using the shower or bath.



Electric radiators for smart home systems, with a nominal thermal output greater than 250 W, must be used exclusively with a home automation management system or an external thermostat featuring control functions capable of ensuring a seasonal energy efficiency higher than 46%, as required by EU Regulation 2024/1103.

AVAILABLE ACCESSORIES







Complete list, codes, prices, and details of the accessories from page 68.



Kit 2 colored hooks



Towel bar in painted mild steel

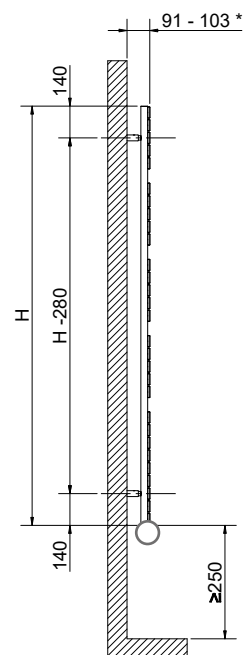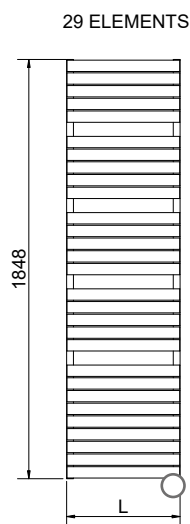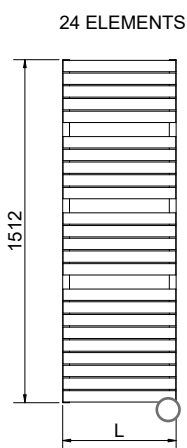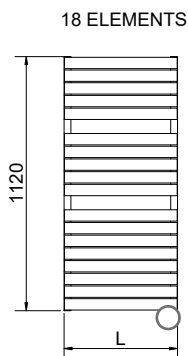

(**) Pipe center (l) measure of the fixing kit



CABLE COVER



* For models with cable cover, the distance from the wall is fixed at 96 mm.

DORY ELECTRIC FOR SMART HOME SYSTEMS WITH CABLE COVER

			CABLE COVER RIGHT				CABLE COVER LEFT					
Height	Width	Fixing kit center distance	Art. nr.	Price [€]			Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	I [mm] (**)	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
784	500	470	3581426100345	527,10	627,10	677,10	3581426100341	527,10	627,10	677,10	500	15
1120	500	470	3581426100346	623,70	723,70	773,70	3581426100342	623,70	723,70	773,70	700	21
1512	500	470	3581426100347	739,20	839,20	889,20	3581426100343	739,20	839,20	889,20	900	28
1848	600	570	3581426100348	871,50	971,50	1.021,50	3581426100344	871,50	971,50	1.021,50	1200	38





HEATING ELEMENT WITHOUT PLUG



DORY ELECTRIC FOR SMART HOME SYSTEMS

			HEATING ELEMENT WITHOUT PLUG RIGHT				HEATING ELEMENT WITHOUT PLUG LEFT					
Height	Width	Fixing kit center distance	Art. nr.	Price [€]			Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	I [mm] (**)	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
784	500	470	3581426100337	474,60	574,60	624,60	3581426100333	474,60	574,60	624,60	500	15
1120	500	470	3581426100338	571,20	671,20	721,20	3581426100334	571,20	671,20	721,20	700	21
1512	500	470	3581426100339	686,70	786,70	836,70	3581426100335	686,70	786,70	836,70	900	28
1848	600	570	3581426100340	819,00	919,00	969,00	3581426100336	819,00	919,00	969,00	1200	38





WI-FI TECH DIGITAL THERMOSTAT



DORY ELECTRIC WITH WI-FI TECH DIGITAL THERMOSTAT

			WI-FI TECH DIGITAL THERMOSTAT RIGHT				WI-FI TECH DIGITAL THERMOSTAT LEFT					
Height	Width	Fixing kit center distance	Art. nr.	Price [€]			Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	I [mm] (**)	R01 White	R01 White	CLASSIC Color	SPECIAL Color	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
784	500	470	3581426100353	620,55	720,55	770,55	3581426100349	620,55	720,55	770,55	500	15
1120	500	470	3581426100354	717,15	817,15	867,15	3581426100350	717,15	817,15	867,15	700	21
1512	500	470	3581426100355	832,65	932,65	982,65	3581426100351	832,65	932,65	982,65	900	28
1848	600	570	3581426100356	964,95	1.064,95	1.114,95	3581426100352	964,95	1.064,95	1.114,95	1200	38



The codes shown in the table refer to the R01 White color models.

KELLY 5010 DX ELECTRIC



WITH WI-FI TECH DIGITAL THERMOSTAT

WITH ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS



Color: F44 Clay

FEATURES

Class protection: CLASS 1

Minimum ingress protection: IP 54 (Home automation)

Minimum ingress protection: IP 24 (Wi-Fi Tech digital thermostat)

Power supply: 230 Vac 50Hz (Home automation)

Power supply: 230 Vac 50Hz (Wi-Fi Tech digital thermostat)

Seasonal energy efficiency η_s : 49,5% (Wi-Fi Tech digital thermostat)

MATERIAL:

- Ø 38 mm collectors in painted mild steel.
- 50x10 mm horizontal heating elements in painted mild steel.
- Heat transfer fluid.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by recyclable cardboard box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart on pages 2 and 3.

ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS VERSION, WITHOUT PLUG:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable in White R01 for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Grey with chrome cap for all remaining colors.

VERSION WITH CABLE COVER:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable.
- Painted metal cable cover in matching radiator color.


VERSION WITH WI-FI TECH THERMOSTAT:

- Immersed electric heating element; regulation by a built-in Wi-Fi room chronothermostat.
- Thermostat finish: WHITE for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Black for radiators in R13 Black and T01 Matt Black; Chrome for all remaining colors.
- 1100 mm electric cable with Schuko plug.



For other thermostat models available, please refer to the "Cordivari Radiators and Towel Rails" price list catalogue.


HOW TO PLACE ELECTRIC RADIATORS




The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must always be installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical controls are accessible to anyone using the shower or bath.




Electric radiators for smart home systems, with a nominal thermal output greater than 250 W, must be used exclusively with a home automation management system or an external thermostat featuring control functions capable of ensuring a seasonal energy efficiency higher than 46%, as required by EU Regulation 2024/1103.




12 ELEMENTS





18 ELEMENTS

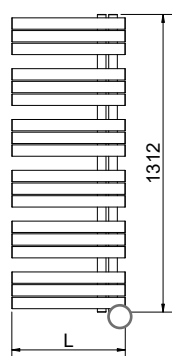

21 ELEMENTS

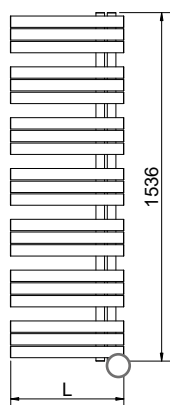

24 ELEMENTS

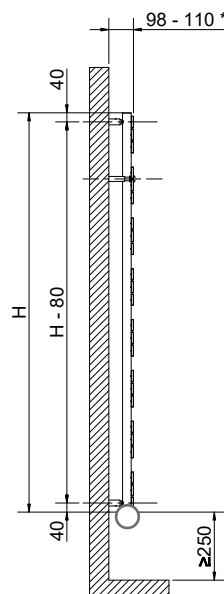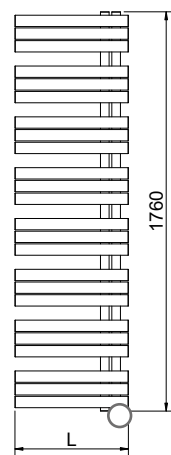


CABLE COVER



* For models with cable cover, the distance from the wall is fixed at 100 mm.

KELLY 5010 DX ELECTRIC FOR SMART HOME SYSTEMS WITH CABLE COVER

		CABLE COVER RIGHT					
Height	Width	Art. nr.	Price [€]			Output	Weight
			R01 White	CLASSIC Color	SPECIAL Color		
864	500	3581726100266	591,15	691,15	741,15	500	13
	600	3581726100267	614,25	714,25	764,25	600	15
1312	500	3581726100268	705,60	805,60	855,60	700	19
1536	500	3581726100270	791,70	891,70	941,70	900	23
1760	600	3581726100273	862,05	962,05	1.012,05	1200	26




HEATING ELEMENT WITHOUT PLUG



KELLY 5010 DX ELECTRIC FOR SMART HOME SYSTEMS

		HEATING ELEMENT WITHOUT PLUG RIGHT					
Height	Width	Art. nr.	Price [€]			Output	Weight
			R01 White	CLASSIC Color	SPECIAL Color		
864	500	3581726100250	538,65	638,65	688,65	500	13
	600	3581726100251	561,75	661,75	711,75	600	15
1312	500	3581726100252	653,10	753,10	803,10	700	19
1536	500	3581726100254	739,20	839,20	889,20	900	23
1760	600	3581726100257	809,55	909,55	959,55	1200	26




WI-FI TECH DIGITAL THERMOSTAT



KELLY 5010 DX ELECTRIC WITH WI-FI TECH DIGITAL THERMOSTAT

		WI-FI TECH DIGITAL THERMOSTAT RIGHT					
Height	Width	Art. nr.	Price [€]			Output	Weight
			R01 White	CLASSIC Color	SPECIAL Color		
864	500	3581726100282	611,10	711,10	761,10	500	13
	600	3581726100283	634,20	734,20	784,20	600	15
1312	500	3581726100284	725,55	825,55	875,55	700	19
1536	500	3581726100286	811,65	911,65	961,65	900	23
1760	600	3581726100289	882,00	982,00	1.032,00	1200	26



The codes shown in the table refer to the R01 White color models.

KELLY 5010 SX ELECTRIC



WITH WI-FI TECH DIGITAL THERMOSTAT

WITH ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS



Color: T19 British Grey

FEATURES

Class protection: CLASS 1

Minimum ingress protection: IP 54 (Home automation)

Minimum ingress protection: IP 24 (Wi-Fi Tech digital thermostat)

Power supply: 230 Vac 50Hz (Home automation)

Power supply: 230 Vac 50Hz (Wi-Fi Tech digital thermostat)

Seasonal energy efficiency η_s : 49,5% (Wi-Fi Tech digital thermostat)

MATERIAL:

- Ø 38 mm collectors in painted mild steel.
- 50x10 mm horizontal heating elements in painted mild steel.
- Heat transfer fluid.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by recyclable cardboard box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart on pages 2 and 3.

ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS VERSION, WITHOUT PLUG:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable in White R01 for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Grey with chrome cap for all remaining colors.

VERSION WITH CABLE COVER:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable.
- Painted metal cable cover in matching radiator color.


VERSION WITH WI-FI TECH THERMOSTAT:

- Immersed electric heating element; regulation by a built-in Wi-Fi room chronothermostat.
- Thermostat finish: WHITE for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Black for radiators in R13 Black and T01 Matt Black; Chrome for all remaining colors.
- 1100 mm electric cable with Schuko plug.



For other thermostat models available, please refer to the "Cordivari Radiators and Towel Rails" price list catalogue.







HOW TO PLACE ELECTRIC RADIATORS



The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must always be installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical controls are accessible to anyone using the shower or bath.



Electric radiators for smart home systems, with a nominal thermal output greater than 250 W, must be used exclusively with a home automation management system or an external thermostat featuring control functions capable of ensuring a seasonal energy efficiency higher than 46%, as required by EU Regulation 2024/1103.

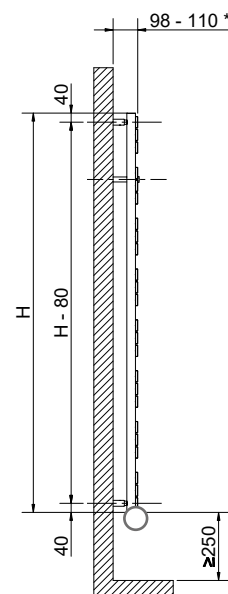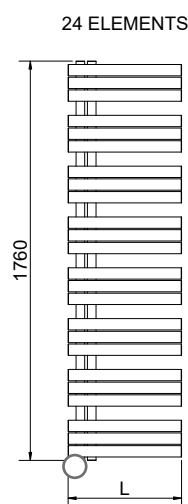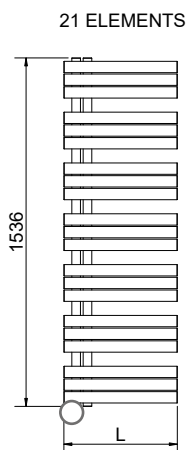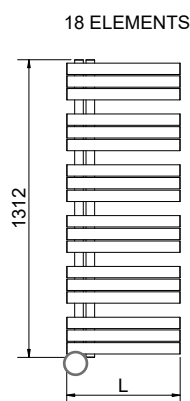


CABLE COVER



* For models with cable cover, the distance from the wall is fixed at 100 mm.

KELLY 5010 SX ELECTRIC FOR SMART HOME SYSTEMS WITH CABLE COVER

		CABLE COVER LEFT					
Height	Width	Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
864	500	3581726100274	591,15	691,15	741,15	500	13
	600	3581726100275	614,25	714,25	764,25	600	15
1312	500	3581726100276	705,60	805,60	855,60	700	19
1536	500	3581726100278	791,70	891,70	941,70	900	23
1760	600	3581726100281	862,05	962,05	1.012,05	1200	26




HEATING ELEMENT WITHOUT PLUG



KELLY 5010 SX ELECTRIC FOR SMART HOME SYSTEMS

		HEATING ELEMENT WITHOUT PLUG LEFT					
Height	Width	Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
864	500	3581726100258	538,65	638,65	688,65	500	13
	600	3581726100259	561,75	661,75	711,75	600	15
1312	500	3581726100260	653,10	753,10	803,10	700	19
1536	500	3581726100262	739,20	839,20	889,20	900	23
1760	600	3581726100265	809,55	909,55	959,55	1200	26




WI-FI TECH DIGITAL THERMOSTAT



KELLY 5010 SX ELECTRIC WITH WI-FI TECH DIGITAL THERMOSTAT

		WI-FI TECH DIGITAL THERMOSTAT LEFT					
Height	Width	Art. nr.	Price [€]			Output	Weight
[mm]	L [mm]	R01 White	R01 White	CLASSIC Color	SPECIAL Color	[Watt]	[Kg]
864	500	3581726100290	611,10	711,10	761,10	500	13
	600	3581726100291	634,20	734,20	784,20	600	15
1312	500	3581726100292	725,55	825,55	875,55	700	19
1536	500	3581726100294	811,65	911,65	961,65	900	23
1760	600	3581726100297	882,00	982,00	1.032,00	1200	26



FEDERICA DX ELECTRIC



WITH WI-FI TECH DIGITAL THERMOSTAT

WITH ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS



Color: RAL 9010 - R01 White

FEATURES

Class protection: CLASS 1

Minimum ingress protection: IP 54 (Home automation)

Minimum ingress protection: IP 24 (Wi-Fi Tech digital thermostat)

Power supply: 230 Vac 50Hz (Home automation)

Power supply: 230 Vac 50Hz (Wi-Fi Tech digital thermostat)

Seasonal energy efficiency η_s : 49,5% (Wi-Fi Tech digital thermostat)

MATERIAL:

- Ø 38 mm collectors in painted mild steel.
- Ø 38 mm horizontal heating elements in painted mild steel.
- Heat transfer fluid.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by recyclable cardboard box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart on pages 2 and 3.

ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS VERSION, WITHOUT PLUG:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable in White R01 for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; GREY with chrome cap for all remaining colors.

VERSION WITH CABLE COVER:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable.
- Painted metal cable cover in matching radiator color.


VERSION WITH WI-FI TECH THERMOSTAT:

- Immersed electric heating element; regulation by a built-in Wi-Fi room chronothermostat.
- Thermostat finish: WHITE for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Black for radiators in R13 Black and T01 Matt Black; Chrome for all remaining colors.
- 1100 mm electric cable with Schuko plug.



For other thermostat models available, please refer to the "Cordivari Radiators and Towel Rails" price list catalogue.


HOW TO PLACE ELECTRIC RADIATORS



The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must always be installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical controls are accessible to anyone using the shower or bath.



Electric radiators for smart home systems, with a nominal thermal output greater than 250 W, must be used exclusively with a home automation management system or an external thermostat featuring control functions capable of ensuring a seasonal energy efficiency higher than 46%, as required by EU Regulation 2024/1103.

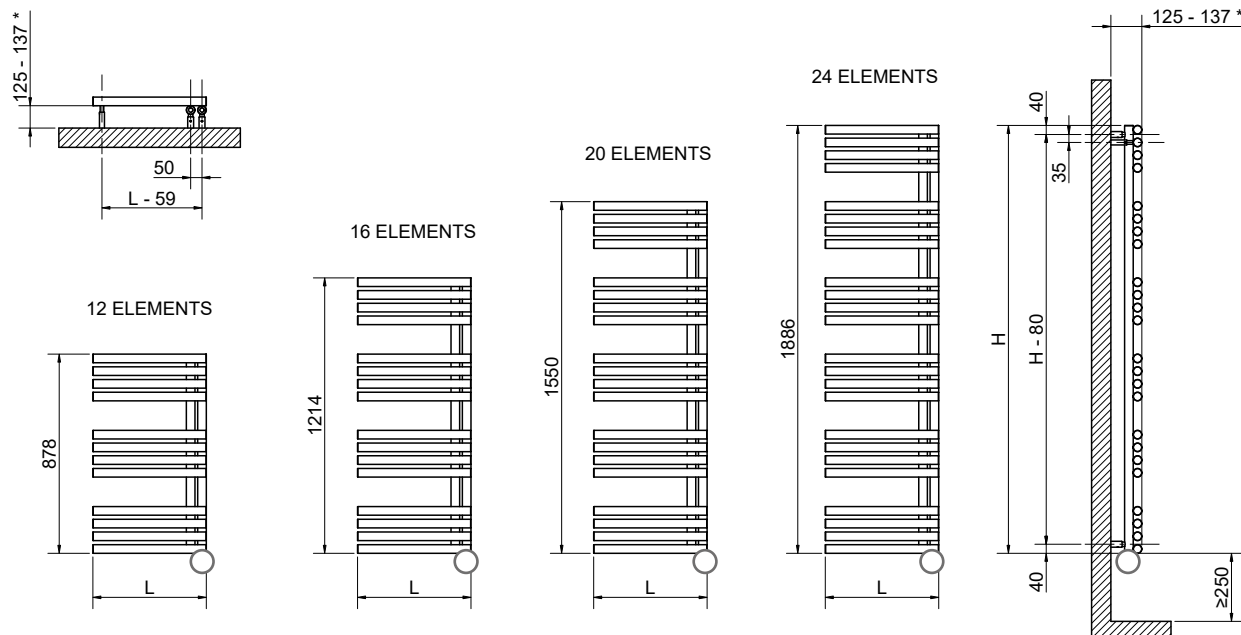


CABLE COVER



* For models with cable cover, the distance from the wall is fixed at 128 mm.

FEDERICA DX ELECTRIC FOR SMART HOME SYSTEMS WITH CABLE COVER

Height [mm]	Width L [mm]	CABLE COVER RIGHT				Output [Watt]	Weight [Kg]
		Art. nr.	Price [€]	Price [€]	Price [€]		
		R01 White	R01 White	CLASSIC Color	SPECIAL Color		
878	500	3581726100314	648,90	748,90	798,90	400	10,4
	600	3581726100315	664,65	764,65	814,65	500	11,9
1214	500	3581726100316	708,75	808,75	858,75	600	13,7
	600	3581726100317	723,45	823,45	873,45	700	15,5
1550	500	3581726100318	766,50	866,50	916,50	700	16,9
	600	3581726100319	781,20	881,20	931,20	700	19,2
1886	500	3581726100320	798,00	898,00	948,00	900	20,3
	600	3581726100321	841,05	941,05	991,05	1000	22,8




HEATING ELEMENT WITHOUT PLUG



FEDERICA DX ELECTRIC FOR SMART HOME SYSTEMS

Height [mm]	Width L [mm]	HEATING ELEMENT WITHOUT PLUG RIGHT				Output [Watt]	Weight [Kg]
		Art. nr.	Price [€]	Price [€]	Price [€]		
		R01 White	R01 White	CLASSIC Color	SPECIAL Color		
878	500	3581726100298	596,40	696,40	746,40	400	10,4
	600	3581726100299	612,15	712,15	762,15	500	11,9
1214	500	3581726100300	656,25	756,25	806,25	600	13,7
	600	3581726100301	670,95	770,95	820,95	700	15,5
1550	500	3581726100302	714,00	814,00	864,00	700	16,9
	600	3581726100303	728,70	828,70	878,70	700	19,2
1886	500	3581726100304	745,50	845,50	895,50	900	20,3
	600	3581726100305	788,55	888,55	938,55	1000	22,8




WI-FI TECH DIGITAL THERMOSTAT



FEDERICA DX ELECTRIC WITH WI-FI TECH DIGITAL THERMOSTAT

Height [mm]	Width L [mm]	WI-FI TECH DIGITAL THERMOSTAT RIGHT				Output [Watt]	Weight [Kg]
		Art. nr.	Price [€]	Price [€]	Price [€]		
		R01 White	R01 White	CLASSIC Color	SPECIAL Color		
878	500	3581726100330	742,35	842,35	892,35	400	10,4
	600	3581726100331	758,10	858,10	908,10	500	11,9
1214	500	3581726100332	802,20	902,20	952,20	600	13,7
	600	3581726100333	816,90	916,90	966,90	700	15,5
1550	500	3581726100334	859,95	959,95	1.009,95	700	16,9
	600	3581726100335	874,65	974,65	1.024,65	700	19,2
1886	500	3581726100336	891,45	991,45	1.041,45	900	20,3
	600	3581726100337	934,50	1.034,50	1.084,50	1000	22,8



The codes shown in the table refer to the R01 White color models.

FEDERICA SX ELECTRIC



WITH WI-FI TECH DIGITAL THERMOSTAT

WITH ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS



Color: T01 Matt Black

FEATURES

Class protection: CLASS 1

Minimum ingress protection: IP 54 (Home automation)

Minimum ingress protection: IP 24 (Wi-Fi Tech digital thermostat)

Power supply: 230 Vac 50Hz (Home automation)

Power supply: 230 Vac 50Hz (Wi-Fi Tech digital thermostat)

Seasonal energy efficiency η_s : 49,5% (Wi-Fi Tech digital thermostat)

MATERIAL:

- Ø 38 mm collectors in painted mild steel.
- Ø 38 mm horizontal heating elements in painted mild steel.
- Heat transfer fluid.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by recyclable cardboard box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart on pages 2 and 3.

ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS VERSION, WITHOUT PLUG:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable in White R01 for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Grey with chrome cap for all remaining colors.

VERSION WITH CABLE COVER:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable.
- Painted metal cable cover in matching radiator color.


VERSION WITH WI-FI TECH THERMOSTAT:

- Immersed electric heating element; regulation by a built-in Wi-Fi room chronothermostat.
- Thermostat finish: WHITE for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky; Black for radiators in R13 Black and T01 Matt Black; Chrome for all remaining colors.
- 1100 mm electric cable with Schuko plug.



For other thermostat models available, please refer to the "Cordivari Radiators and Towel Rails" price list catalogue.


HOW TO PLACE ELECTRIC RADIATORS



The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must always be installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical controls are accessible to anyone using the shower or bath.



Electric radiators for smart home systems, with a nominal thermal output greater than 250 W, must be used exclusively with a home automation management system or an external thermostat featuring control functions capable of ensuring a seasonal energy efficiency higher than 46%, as required by EU Regulation 2024/1103.

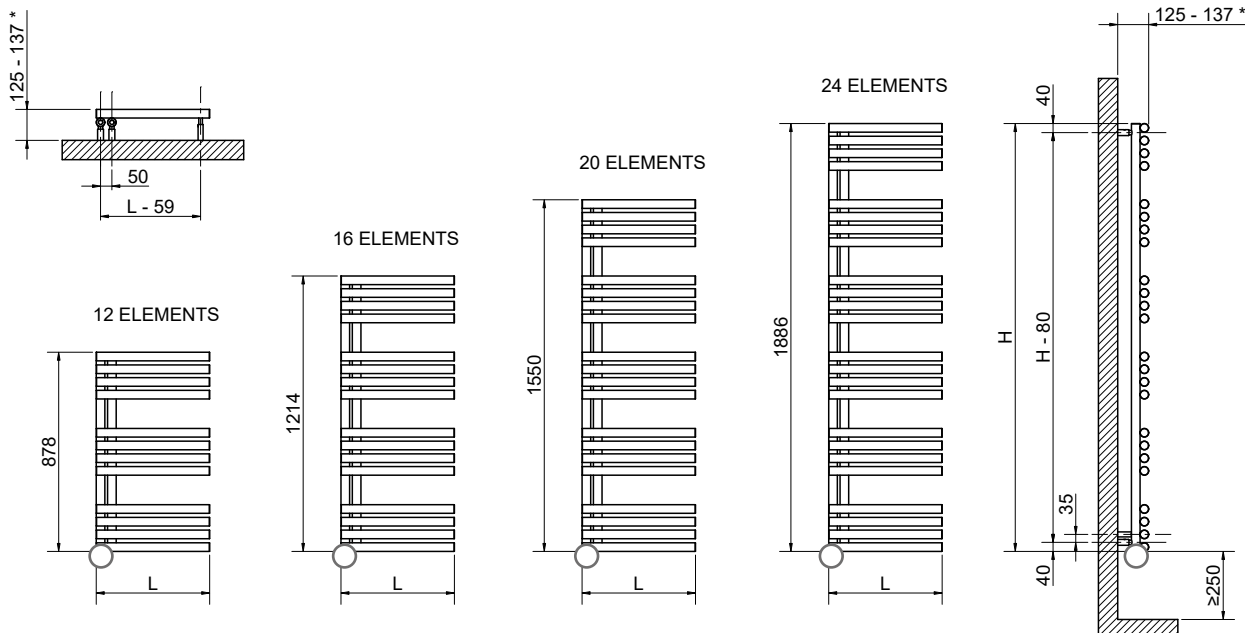


CABLE COVER



* For models with cable cover, the distance from the wall is fixed at 128 mm.

FEDERICA SX ELECTRIC FOR SMART HOME SYSTEMS WITH CABLE COVER

Height [mm]	Width L [mm]	CABLE COVER LEFT				Output [Watt]	Weight [Kg]
		Art. nr.	Price [€]	Price [€]	Price [€]		
878	500	R01 White	R01 White	CLASSIC Color	SPECIAL Color	400	10,4
	600	3581726100322	648,90	748,90	798,90	500	11,9
1214	500	3581726100323	664,65	764,65	814,65	600	13,7
	600	3581726100324	708,75	808,75	858,75	700	15,5
1550	500	3581726100325	723,45	823,45	873,45	700	16,9
	600	3581726100326	766,50	866,50	916,50	700	19,2
1886	500	3581726100327	781,20	881,20	931,20	900	20,3
	600	3581726100328	798,00	898,00	948,00	1000	22,8
		3581726100329	841,05	941,05	991,05		




HEATING ELEMENT WITHOUT PLUG



FEDERICA SX ELECTRIC FOR SMART HOME SYSTEMS

Height [mm]	Width L [mm]	HEATING ELEMENT WITHOUT PLUG LEFT				Output [Watt]	Weight [Kg]
		Art. nr.	Price [€]	Price [€]	Price [€]		
878	500	R01 White	R01 White	CLASSIC Color	SPECIAL Color	400	10,4
	600	3581726100306	596,40	696,40	746,40	500	11,9
1214	500	3581726100307	612,15	712,15	762,15	600	13,7
	600	3581726100308	656,25	756,25	806,25	700	15,5
1550	500	3581726100309	670,95	770,95	820,95	700	16,9
	600	3581726100310	714,00	814,00	864,00	700	19,2
1886	500	3581726100311	728,70	828,70	878,70	900	20,3
	600	3581726100312	745,50	845,50	895,50	1000	22,8
		3581726100313	788,55	888,55	938,55		




WI-FI TECH DIGITAL THERMOSTAT



FEDERICA SX ELECTRIC WITH WI-FI TECH DIGITAL THERMOSTAT

Height [mm]	Width L [mm]	WI-FI TECH DIGITAL THERMOSTAT LEFT				Output [Watt]	Weight [Kg]
		Art. nr.	Price [€]	Price [€]	Price [€]		
878	500	R01 White	R01 White	CLASSIC Color	SPECIAL Color	400	10,4
	600	3581726100338	742,35	842,35	892,35	500	11,9
1214	500	3581726100339	758,10	858,10	908,10	600	13,7
	600	3581726100340	802,20	902,20	952,20	700	15,5
1550	500	3581726100341	816,90	916,90	966,90	700	16,9
	600	3581726100342	859,95	959,95	1.009,95	700	19,2
1886	500	3581726100343	874,65	974,65	1.024,65	900	20,3
	600	3581726100344	891,45	991,45	1.041,45	1000	22,8
		3581726100345	934,50	1.034,50	1.084,50		



The codes shown in the table refer to the R01 White color models.

ELEN 18 ELECTRIC - POLISHED STAINLESS STEEL



WITH WI-FI TECH DIGITAL THERMOSTAT

WITH ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS



INOX STYLE

MATERIAL:

- Ø 30 mm vertical collectors in polished stainless steel.
- Ø 18 mm horizontal elements in polished stainless steel.
- Heat transfer fluid.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by recyclable cardboard box. User notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.

ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS VERSION, WITHOUT PLUG:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm grey Electric cable with chrome cap.

VERSION WITH CABLE COVER:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable.
- Cable cover in stainless steel.

VERSION WITH WI-FI TECH THERMOSTAT:

- Immersed electric heating element; regulation by a built-in Wi-Fi room chronothermostat.
- Thermostat finish: chrome.
- 1100 mm electric cable with Schuko plug.

FEATURES

Class protection: CLASS 1

Minimum ingress protection: IP 54 (Home automation)

Minimum ingress protection: IP 24 (Wi-Fi Tech digital thermostat)

Power supply: 230 Vac 50Hz (Home automation)


Power supply: 230 Vac 50Hz (Wi-Fi Tech digital thermostat)

Seasonal energy efficiency η_s : 49,5% (Wi-Fi Tech digital thermostat)



For other thermostat models available, please refer to the "Cordivari Radiators and Towel Rails" price list catalogue.

HOW TO PLACE ELECTRIC RADIATORS



The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must always be installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical controls are accessible to anyone using the shower or bath.



Electric radiators for smart home systems, with a nominal thermal output greater than 250 W, must be used exclusively with a home automation management system or an external thermostat featuring control functions capable of ensuring a seasonal energy efficiency higher than 46%, as required by EU Regulation 2024/1103.

AVAILABLE ACCESSORIES






Complete list, codes, prices, and details of the accessories from page 68.



Kit 2 hooks polished stainless steel



Towel bar polished stainless steel

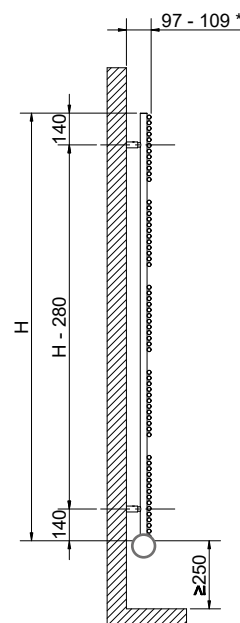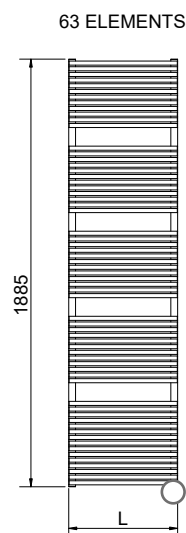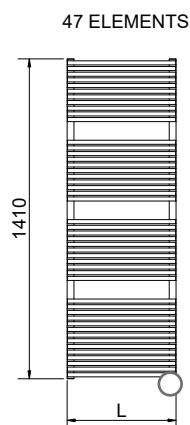

(**) Pipe center (l) measure of the fixing kit



CABLE COVER



* For models with cable cover, the distance from the wall is fixed at 104 mm.

ELEN 18 ELECTRIC POLISHED STAINLESS STEEL FOR SMART HOME SYSTEMS, WITH CABLE COVER

Height [mm]	Width L [mm]	Fixing kit center distance l [mm] (**)	CABLE COVER RIGHT		CABLE COVER LEFT		Output	Weight
			Art. nr.	Price [€]	Art. nr.	Price [€]	[Watt]	[Kg]
760	480	450	3581440400059	1.168,65	3581440400062	1.168,65	300	14
1410	480	450	3581440400060	1.598,10	3581440400063	1.598,10	500	24
1885	530	500	3581440400061	2.024,40	3581440400064	2.024,40	700	32





HEATING ELEMENT WITHOUT PLUG



ELEN 18 ELECTRIC POLISHED STAINLESS STEEL FOR SMART HOME SYSTEMS

Height [mm]	Width L [mm]	Fixing kit center distance l [mm] (**)	HEATING ELEMENT WITHOUT PLUG RIGHT		HEATING ELEMENT WITHOUT PLUG LEFT		Output	Weight
			Art. nr.	Price [€]	Art. nr.	Price [€]	[Watt]	[Kg]
760	480	450	3581440400065	1.058,40	3581440400068	1.058,40	300	14
1410	480	450	3581440400066	1.487,85	3581440400069	1.487,85	500	24
1885	530	500	3581440400067	1.914,15	3581440400070	1.914,15	700	32





WI-FI TECH DIGITAL THERMOSTAT



ELEN 18 ELECTRIC POLISHED STAINLESS STEEL WITH WI-FI TECH DIGITAL THERMOSTAT

Height [mm]	Width L [mm]	Fixing kit center distance l [mm] (**)	WI-FI TECH DIGITAL THERMOSTAT RIGHT		WI-FI TECH DIGITAL THERMOSTAT LEFT		Output	Weight
			Art. nr.	Price [€]	Art. nr.	Price [€]	[Watt]	[Kg]
760	480	450	3581440400071	1.130,85	3581440400074	1.130,85	300	14
1410	480	450	3581440400072	1.560,30	3581440400075	1.560,30	500	24
1885	530	500	3581440400073	1.986,60	3581440400076	1.986,60	700	32



SANDY ELECTRIC - POLISHED STAINLESS STEEL



WITH WI-FI TECH DIGITAL THERMOSTAT

WITH ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS



INOX STYLE

MATERIAL:

- Ø 38 mm vertical collectors in polished stainless steel.
- Ø 25 mm horizontal elements in polished stainless steel.
- Heat transfer fluid.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by recyclable cardboard box. User notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.

ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS VERSION, WITHOUT PLUG:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm grey Electric cable with chrome cap.

VERSION WITH CABLE COVER:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable.
- Cable cover in stainless steel.

VERSION WITH WI-FI TECH THERMOSTAT:

- Immersed electric heating element; regulation by a built-in Wi-Fi room chronothermostat.
- Thermostat finish: chrome.
- 1100 mm electric cable with Schuko plug.

FEATURES

Class protection: CLASS 1

Minimum ingress protection: IP 54 (Home automation)

Minimum ingress protection: IP 24 (Wi-Fi Tech digital thermostat)

Power supply: 230 Vac 50Hz (Home automation)


Power supply: 230 Vac 50Hz (Wi-Fi Tech digital thermostat)

Seasonal energy efficiency η_s : 49,5% (Wi-Fi Tech digital thermostat)



For other thermostat models available, please refer to the "Cordivari Radiators and Towel Rails" price list catalogue.

HOW TO PLACE ELECTRIC RADIATORS



The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must always be installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical controls are accessible to anyone using the shower or bath.



Electric radiators for smart home systems, with a nominal thermal output greater than 250 W, must be used exclusively with a home automation management system or an external thermostat featuring control functions capable of ensuring a seasonal energy efficiency higher than 46%, as required by EU Regulation 2024/1103.

AVAILABLE ACCESSORIES







Complete list, codes, prices, and details of the accessories from page 68.



Kit 2 hooks polished stainless steel



Towel bar polished stainless steel

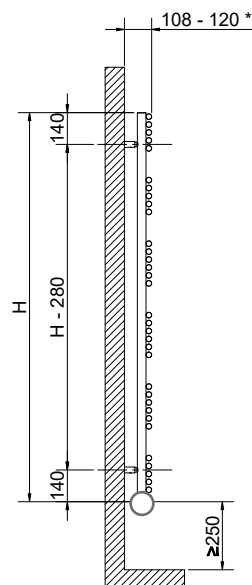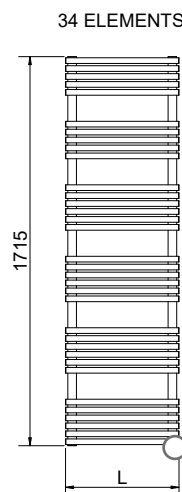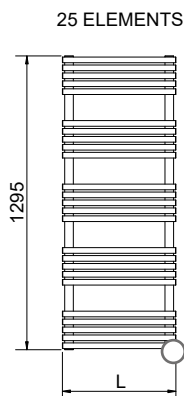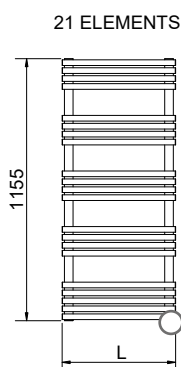



(**) Pipe center (l) measure of the fixing kit



* For models with cable cover, the distance from the wall is fixed at 115 mm.



SANDY ELECTRIC POLISHED STAINLESS STEEL FOR SMART HOME SYSTEMS, WITH CABLE COVER

CABLE COVER			CABLE COVER RIGHT		CABLE COVER LEFT		Output	Weight
Height	Width	Fixing kit center distance	Art. nr.	Price [€]	Art. nr.	Price [€]	[Watt]	[Kg]
[mm]	L [mm]	l [mm] (**)						
735	500	462	3581440402046	990,15	3581440402042	990,15	300	11,0
1155	500	462	3581440402047	1.263,15	3581440402043	1.263,15	400	18,0
1295	500	462	3581440402048	1.388,10	3581440402044	1.388,10	600	21,0
1715	500	462	3581440402049	1.640,10	3581440402045	1.640,10	700	28,0





SANDY ELECTRIC POLISHED STAINLESS STEEL FOR SMART HOME SYSTEMS

HEATING ELEMENT WITHOUT PLUG			HEATING ELEMENT WITHOUT PLUG RIGHT		HEATING ELEMENT WITHOUT PLUG LEFT		Output	Weight
Height	Width	Fixing kit center distance	Art. nr.	Price [€]	Art. nr.	Price [€]	[Watt]	[Kg]
[mm]	L [mm]	l [mm] (**)						
735	500	462	3581440402038	879,90	3581440402034	879,90	300	11,0
1155	500	462	3581440402039	1.152,90	3581440402035	1.152,90	400	18,0
1295	500	462	3581440402040	1.277,85	3581440402036	1.277,85	600	21,0
1715	500	462	3581440402041	1.529,85	3581440402037	1.529,85	700	28,0



SANDY ELECTRIC POLISHED STAINLESS STEEL WITH WI-FI TECH DIGITAL THERMOSTAT

WI-FI TECH DIGITAL THERMOSTAT			WI-FI TECH DIGITAL THERMOSTAT RIGHT		WI-FI TECH DIGITAL THERMOSTAT LEFT		Output	Weight
Height	Width	Fixing kit center distance	Art. nr.	Price [€]	Art. nr.	Price [€]	[Watt]	[Kg]
[mm]	L [mm]	l [mm] (**)						
735	500	462	3581440402054	1.025,85	3581440402050	1.025,85	300	11,0
1155	500	462	3581440402055	1.298,85	3581440402051	1.298,85	400	18,0
1295	500	462	3581440402056	1.423,80	3581440402052	1.423,80	600	21,0
1715	500	462	3581440402057	1.675,80	3581440402053	1.675,80	700	28,0



LEILA ELECTRIC - POLISHED STAINLESS STEEL



WITH WI-FI TECH DIGITAL THERMOSTAT

WITH ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS



MATERIAL:

- Ø 30 mm vertical collectors in polished stainless steel.
- Ø 18 mm horizontal elements in polished stainless steel.
- Heat transfer fluid.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions, included.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by recyclable cardboard box. User notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.

ELECTRIC HEATING ELEMENT FOR SMART HOME SYSTEMS VERSION, WITHOUT PLUG:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm grey Electric cable with chrome cap.

VERSION WITH CABLE COVER:

- Immersed electric heating element; control managed by smart home system.
- 1200 mm electric cable.
- Cable cover in stainless steel.

VERSION WITH WI-FI TECH THERMOSTAT:

- Immersed electric heating element; regulation by a built-in Wi-Fi room chronothermostat.
- Thermostat finish: chrome.
- 1100 mm electric cable with Schuko plug.

FEATURES

Class protection: CLASS 1

Minimum ingress protection: IP 54 (Home automation)

Minimum ingress protection: IP 24 (Wi-Fi Tech digital thermostat)

Power supply: 230 Vac 50Hz (Home automation)


Power supply: 230 Vac 50Hz (Wi-Fi Tech digital thermostat)

Seasonal energy efficiency η_s : 49,5% (Wi-Fi Tech digital thermostat)



For other thermostat models available, please refer to the "Cordivari Radiators and Towel Rails" price list catalogue.


HOW TO PLACE ELECTRIC RADIATORS



The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must always be installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical controls are accessible to anyone using the shower or bath.



Electric radiators for smart home systems, with a nominal thermal output greater than 250 W, must be used exclusively with a home automation management system or an external thermostat featuring control functions capable of ensuring a seasonal energy efficiency higher than 46%, as required by EU Regulation 2024/1103.

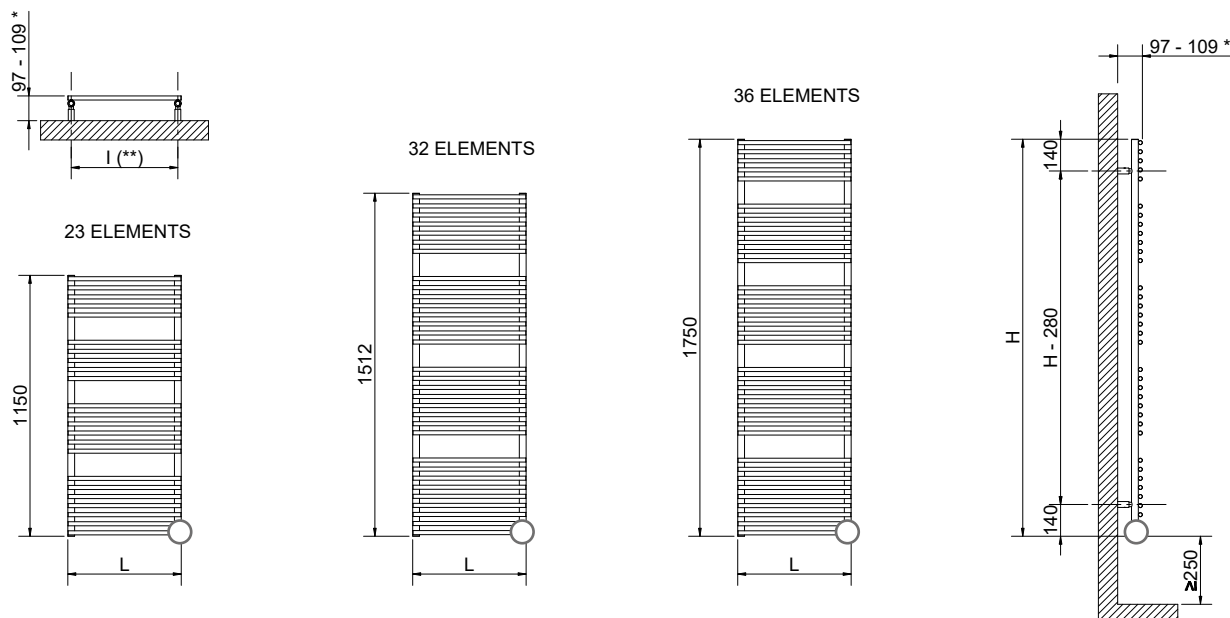



(**) The fixing kit has the same pipe centre (l) as the radiator



CABLE COVER

LEILA ELECTRIC POLISHED STAINLESS STEEL FOR SMART HOME SYSTEMS, WITH CABLE COVER

Height [mm]	Width L [mm]	Fixing kit center distance l [mm] (**)	CABLE COVER RIGHT		CABLE COVER LEFT		Output	Weight
			Art. nr.	Price [€]	Art. nr.	Price [€]	[Watt]	[Kg]
1150	500	470	3581560400036	1.073,10	3581560400033	1.073,10	300	13
1512	500	470	3581560400037	1.285,20	3581560400034	1.285,20	500	18
1750	500	470	3581560400038	1.398,60	3581560400035	1.398,60	600	21





* For models with cable cover, the distance from the wall is fixed at 104 mm.



HEATING ELEMENT
WITHOUT PLUG

LEILA ELECTRIC POLISHED STAINLESS STEEL FOR SMART HOME SYSTEMS



Height [mm]	Width L [mm]	Fixing kit center distance l [mm] (**)	HEATING ELEMENT WITHOUT PLUG RIGHT		HEATING ELEMENT WITHOUT PLUG LEFT		Output	Weight
			Art. nr.	Price [€]	Art. nr.	Price [€]	[Watt]	[Kg]
1150	500	470	3581560400030	962,85	3581560400027	962,85	300	13
1512	500	470	3581560400031	1.174,95	3581560400028	1.174,95	500	18
1750	500	470	3581560400032	1.288,35	3581560400029	1.288,35	600	21



WI-FI TECH
DIGITAL THERMOSTAT

LEILA ELECTRIC POLISHED STAINLESS STEEL WITH WI-FI TECH DIGITAL THERMOSTAT

Height [mm]	Width L [mm]	Fixing kit center distance l [mm] (**)	WI-FI TECH DIGITAL THERMOSTAT RIGHT		WI-FI TECH DIGITAL THERMOSTAT LEFT		Output	Weight
			Art. nr.	Price [€]	Art. nr.	Price [€]	[Watt]	[Kg]
1150	500	470	3581560400042	1.108,80	3581560400039	1.108,80	300	13
1512	500	470	3581560400043	1.320,90	3581560400040	1.320,90	500	18
1750	500	470	3581560400044	1.434,30	3581560400041	1.434,30	600	21





Color RAL 9016-R02 Traffic White
White Square Wi-Fi thermostat and right-hand cable

FEATURES

Class protection: CLASS 1

Minimum ingress protection: IP 24


Wire lenght: 1400 mm with Schuko plug

Seasonal energy efficiency η_s : 49,5%



Color T01 Matt Black
Black Square Wi-Fi thermostat and left-hand cable

HOW TO PLACE ELECTRIC RADIATORS



The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must always be installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical controls are accessible to anyone using the shower or bath.

MATERIAL:

- 40x34 mm collectors in painted mild steel.
- Ø 22 mm horizontal heating elements in painted mild steel.

FIXING KIT:

VDI 6036-compliant fixing kits, designed to ensure maximum hold, safety and stability of the towel rail. The kits include brackets, hex key, wall plugs and fixing screws, and are suitable for installation on solid or hollow brick walls. For correct installation, always refer to the supplied assembly instructions, included.

PACKAGING:

The radiator is protected by recyclable cardboard box.
User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

RAL 9016-R02 Traffic White, **e T01** Matt Black.

AVAILABLE FUNCTIONS

- ☒ With **Square Wi-Fi** digital thermostat
- ☒ With **Square** digital thermostat

SQUARE DIGITAL THERMOSTAT







- WHITE on radiators in RAL 9016-R02 Traffic White
- BLACK on radiators in T01 Matt Black



- Red and white backlighting with integrated programming and open window sensor;
- Room temperature control with desired temperature setting;
- Weekly programming with selection of 7 different programming profiles, also customisable;
- Fast heating thanks to the "Boost" function;
- "Anti-freeze" function for unused rooms over longer periods;
- 2.4 GHz Wi-Fi connectivity with control via Smart Life app (Wi-Fi version only).






Cordivari ErP electric radiators stand out for their high efficiency. These models comply with EU Regulation 2024/1103. The seasonal energy efficiency of these fixed electric local space heaters, with a nominal thermal output greater than 250 W, exceeds 46% across all models. Each ErP electric radiator is equipped with at least electronic temperature control, open window detection, weekly programming and standby electric power consumption of <0.5 W, or 2.0 W in Wi-Fi mode, where applicable.

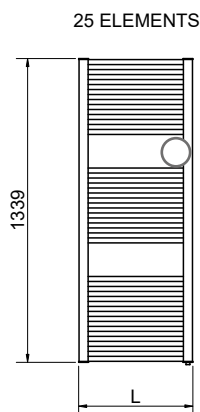



LORETTA ELECTRIC WITH SQUARE DIGITAL THERMOSTAT

Height	Width	RIGHT-HAND CABLE				LEFT-HAND CABLE				Output	Weight
		Art. nr.	Price	Art. nr.	Price	Art. nr.	Price	Art. nr.	Price		
[mm]	L [mm]	RAL 9016-R02 Traffic White	[€]	T01 Matt Black	[€]	RAL 9016-R02 Traffic White	[€]	T01 Matt Black	[€]	[Watt]	[Kg]
685	500	3581860150001	298,00	3581860150007	398,00	3581860150013	304,00	3581860150016	404,00	400	5,5
987	500	3581860150002	342,00	3581860150008	442,00	3581860150014	348,00	3581860150017	448,00	500	7
1339	500	3581860150003	380,00	3581860150009	480,00	3581860150015	386,00	3581860150018	486,00	750	9,5



LORETTA ELECTRIC WITH SQUARE WI-FI DIGITAL THERMOSTAT

Height	Width	RIGHT-HAND CABLE				LEFT-HAND CABLE				Output	Weight
		Art. nr.	Price	Art. nr.	Price	Art. nr.	Price	Art. nr.	Price		
[mm]	L [mm]	RAL 9016-R02 Traffic White	[€]	T01 Matt Black	[€]	RAL 9016-R02 Traffic White	[€]	T01 Matt Black	[€]	[Watt]	[Kg]
685	500	3581860150004	336,00	3581860150010	436,00	3581860150019	342,00	3581860150022	442,00	400	5,5
987	500	3581860150005	380,00	3581860150011	480,00	3581860150020	386,00	3581860150023	486,00	500	7
1339	500	3581860150006	418,00	3581860150012	518,00	3581860150021	424,00	3581860150024	524,00	750	9,5





ACCESSORIES

TOWEL RAILS &
LIVING RADIATORS


ELECTRIC RADIATORS
WI-FI & SMART HOME

ACCESSORIES

ACCESSORIES


TOTAL COLOR KRISTAL VALVE KIT

Valve kit includes: valve and holder, fittings for copper (Ø 12-14) or multilayer (Ø 16) pipes. For the thermostatic Kristal valve the thermostatic head must be ordered separately. The article number of the chart refers to standard color white R01; colors different from standard are supplied exclusively with the matching colored radiator. For different colors see the color chart pages 2 and 3.

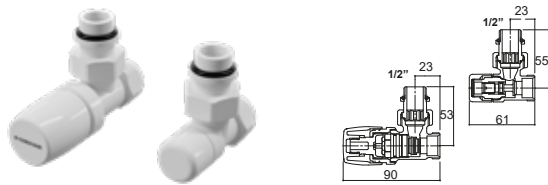

**TOTAL COLOR, KRISTAL VALVE,
ANGLED WITH THERMOSTATIC OPTION WHITE R01**

Copper conn. Ø 12-14		Multilayer conn. Ø 16	
WHITE	Art. nr. 5991990334027	WHITE	Art. nr. 5991990334026
	Price € 112,35		Price € 99,75
CLASSIC	Price € 142,35	CLASSIC	Price € 129,75
SPECIAL	Price € 162,35	SPECIAL	Price € 149,75

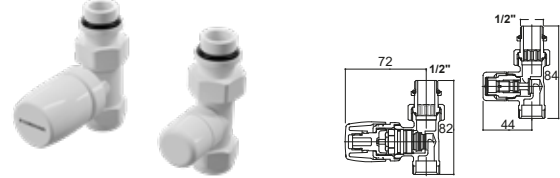

**TOTAL COLOR, KRISTAL VALVE,
STRAIGHT WITH THERMOSTATIC OPTION WHITE R01**

Copper conn. Ø 12-14		Multilayer conn. Ø 16	
WHITE	Art. nr. 5991990334025	WHITE	Art. nr. 5991990334024
	Price € 128,10		Price € 114,45
CLASSIC	Price € 158,10	CLASSIC	Price € 144,45
SPECIAL	Price € 178,10	SPECIAL	Price € 164,45



**TOTAL COLOR, KRISTAL VALVE, ANGLED RIGHT PIPE CENTRES 50 MM
WITH THERMOSTATIC OPTION WHITE R01**

Copper conn. Ø 12-14		Multilayer conn. Ø 16	
WHITE	Art. nr. 5991990334035	BIANCO	Art. nr. 5991990334034
	Price € 136,50		Price € 117,60
CLASSIC	Price € 166,50	CLASSIC	Price € 147,60
SPECIAL	Price € 186,50	SPECIAL	Price € 167,60



**TOTAL COLOR, KRISTAL VALVE, ANGLED LEFT PIPE CENTRES 50 MM
WITH THERMOSTATIC OPTION WHITE R01**

Copper conn. Ø 12-14		Multilayer conn. Ø 16	
WHITE	Art. nr. 5991990334037	WHITE	Art. nr. 5991990334036
	Price € 136,50		Price € 117,60
CLASSIC	Price € 166,50	CLASSIC	Price € 147,60
SPECIAL	Price € 186,50	SPECIAL	Price € 167,60

For the complete list of accessories, please refer to the Cordivari "Radiators and Towel Rails" catalogue.




Valve cap, fittings and shanks matching the valve color.

ACCESSORIES


TOTAL COLOR KRISTAL VALVE KIT

Valve kit includes: valve and holder, fittings for copper (Ø 12-14) or multilayer (Ø 16) pipes. For the thermostatic Kristal valve the thermostatic head must be ordered separately. The article number of the chart refers to standard color white R01; colors different from standard are supplied exclusively with the matching colored radiator. For different colors see the color chart pages 2 and 3.




TOTAL COLOR, KRISTAL VALVE, STRAIGHT RIGHT PIPE CENTRES 50 MM WITH THERMOSTATIC OPTION WHITE R01

Copper conn. Ø 12-14		Multilayer conn. Ø 16	
WHITE	Art. nr. 5991990334039	WHITE	Art. nr. 5991990334038
	Price € 136,50		Price € 117,60
CLASSIC	Price € 166,50	CLASSIC	Price € 147,60
SPECIAL	Price € 186,50	SPECIAL	Price € 167,60




TOTAL COLOR, KRISTAL VALVE, COMBI WITH THERMOSTATIC OPTION WHITE R01

Copper conn. Ø 12-14 and Multilayer conn. Ø 16	
WHITE	Art. nr. 5991990334044
	Price € 299,25
CLASSIC	Price € 329,25
SPECIAL	Price € 349,25



TOTAL COLOR, KRISTAL VALVE, CORNER RIGHT PIPE CENTRES 50 MM WITH THERMOSTATIC OPTION WHITE R01

Copper conn. Ø 12-14		Multilayer conn. Ø 16	
WHITE	Art. nr. 5991990334029	WHITE	Art. nr. 5991990334028
	Price € 136,50		Price € 121,80
CLASSIC	Price € 166,50	CLASSIC	Price € 151,80
SPECIAL	Price € 186,50	SPECIAL	Price € 171,80



TOTAL COLOR, KRISTAL VALVE, CORNER LEFT PIPE CENTRES 50 MM WITH THERMOSTATIC OPTION WHITE R01

Copper conn. Ø 12-14		Multilayer conn. Ø 16	
WHITE	Art. nr. 5991990334031	WHITE	Art. nr. 5991990334030
	Price € 136,50		Price € 121,80
CLASSIC	Price € 166,50	CLASSIC	Price € 151,80
SPECIAL	Price € 186,50	SPECIAL	Price € 171,80

For the complete list of accessories, please refer to the Cordivari "Radiators and Towel Rails" catalogue.




Valve cap, fittings and shanks matching the valve color.

ACCESSORIES

THERMOSTATIC HEAD KRISTAL TC TOTAL COLOR


FULLY COLORED

The **thermostatic head Kristal TC Total Color**, suitable for all valves of the Kristal series, can be colored to match the valve. It is available in all the colors offered in the color chart.



**THERMOSTATIC HEAD KRISTAL TC
TOTAL COLOR**

	PURE WHITE RAL 9010 - R01	Art. nr.	5035270710028
		Price €	40,95
	TRAFFIC WHITE RAL 9016 - R02	Art. nr.	5035270710029
		Price €	40,95
	MATT WHITE T11	Art. nr.	5035270710030
		Price €	40,95
	MATT BLACK T01	Art. nr.	5035270710031
		Price €	40,95



**THERMOSTATIC HEAD KRISTAL TC
FULLY COLORED**

	CLASSIC	Price €	70,95
	SPECIAL	Price €	90,95

HOOKS AND TOWEL BAR STANDARD COLOR WHITE R01

TOWEL BAR - WHITE R01



	Suitable for:	Width mm	Art. nr. R01	Price €		
	CLAUDIA® Electric (Width ≥ 400 mm)	276	5991990310047	114,45	144,45	164,45
	CLAUDIA® Electric (Width ≥ 500 mm)	368	5991990310029			
	CLAUDIA® Electric (Width ≥ 600 mm)	460	5991990310034			

TOWEL BAR - WHITE R01



	Suitable for:	Width mm	Art. nr. R01	Price €		
	LUCY 18 ELECTRIC	440	5991990331126	137,55	167,55	187,55
	DORY ELECTRIC	390	5991990331127	124,95	154,95	174,95

KIT 2 HOOKS - WHITE R01



	Suitable for:	Art. nr. R01	Price €		
	CLAUDIA® ELECTRIC	5991990310028	48,30	78,30	98,30

KIT 2 HOOKS - WHITE R01



	Suitable for:	Art. nr. R01	Price €		
	LUCY 18 ELECTRIC	5991990310388	96,60	126,60	146,60
	DORY ELECTRIC	5991990310389	93,45	123,45	143,45
	KELLY 5010 ELECTRIC				

The code nr of the chart refer to standard color R01 White - RAL 9010; colors different from standard are supplied exclusively with the matching colored radiator. For different colors see color chart pages 2 and 3.

HOOKS AND TOWEL BAR STAINLESS STEEL

TOWEL BAR - POLISHED STAINLESS STEEL



Suitable for:	Width mm	Art. nr.	Price €
SANDY ELECTRIC (Width ≥ 500 mm)	350	5991990010220	175,35

KIT 2 HOOKS - POLISHED STAINLESS STEEL



Suitable for:	Art. nr.	Price €
SANDY ELECTRIC	5991990010215	145,95
ELEN 18 ELECTRIC	5991990010216	151,20

For the complete list of ACCESSORIES, please refer to the Cordivari "Radiators and Towel Rails" catalogue.

DUAL ENERGY KIT

WI-FI TECH DIGITAL THERMOSTAT KIT



WHITE

Art. nr.	Output [Watt]	Price €	Size [mm]
5102000001228	300	216,00	ø 12 x 350
5102000001229	400	218,00	ø 12 x 415
5102000001230	500	219,00	ø 12 x 450
5102000001231	600	220,00	ø 12 x 550
5102000001232	700	222,00	ø 12 x 550
5102000001233	900	225,00	ø 12 x 710
5102000001234	1000	229,00	ø 12 x 710
5102000001235	1200	230,00	ø 12 x 920



CHROMED

Art. nr.	Output [Watt]	Price €	Size [mm]
5102000001239	300	228,00	ø 12 x 350
5102000001240	400	230,00	ø 12 x 415
5102000001241	500	231,00	ø 12 x 450
5102000001242	600	232,00	ø 12 x 550
5102000001243	700	234,00	ø 12 x 550
5102000001244	900	237,00	ø 12 x 710
5102000001245	1000	241,00	ø 12 x 710
5102000001246	1200	242,00	ø 12 x 920



BLACK

Art. nr.	Output [Watt]	Price €	Size [mm]
5102000001247	300	228,00	ø 12 x 350
5102000001248	400	230,00	ø 12 x 415
5102000001249	500	231,00	ø 12 x 450
5102000001250	600	232,00	ø 12 x 550
5102000001251	700	234,00	ø 12 x 550
5102000001252	900	237,00	ø 12 x 710
5102000001253	1000	241,00	ø 12 x 710
5102000001254	1200	242,00	ø 12 x 920

- 1 electric heating element with digital thermostat, Class I, IP24 protection rating, 230 V AC power supply, complete with electric cable and Schuko plug.
- 2 x 1/2" G T-fittings • 1 x 1/2" G M nickel-plated brass plug with O-ring.
- Assembly instructions, included.

THERMOSTAT RANGE

new

NEW WI-FI WALL THERMOSTAT FOR SMART HOME SYSTEMS

The new Cordivari Wi-Fi Wall Thermostat is compatible with all Cordivari radiators equipped with heating element for smart home system version. It has been designed for efficient management of one or multiple radiators simultaneously, with a maximum total load of 3000 W. Featuring weekly programming, it allows the customization of each time slot, optimizing both comfort and energy consumption. The open-window detection function helps prevent energy waste by automatically interrupting heating when necessary.

Thanks to its compatibility with the **Smart Life** app, radiators can be controlled remotely via Wi-Fi. Compliant with Regulation (EU) 2024/1103.



WI-FI WALL THERMOSTAT

Art. nr.	Price €
5150990000026	125,00



NEW WI-FI TECH DIGITAL THERMOSTAT

With Cordivari Wi-Fi Tech thermostats, it is possible to customize the heating of each room through a single account by connecting every Radiator to the home Wi-Fi network. The system allows individual control of each towel warmer or the creation of thermostat groups. Through the **Smart Life** mobile app, available for iOS and Android, users can control and adjust the temperature, set and program operating schedules and modes, and monitor all settings parameters for each Radiator or group. The thermostat features weekly programming and an open-window detection function. Compliant with Regulation (EU) 2024/1103.



WHITE: for radiators in R01 White, R02 Traffic White, T11 Matt White and F20 Milky finishes.



BLACK: for radiators in R13 Black and T01 Matt Black finishes.



CHROME: for all other colour finishes.



Wi-Fi Tech Digital Thermostat
Dimensions: H: 82 mm x L: 70 mm x P: 50 mm.

PRODUCT CERTIFICATES



Zona Ind. Pagine 6402 Morro D'Oro (TE)
Italy www.cordivari.it info@cordivari.it

PRODUCT ENVIRONMENTAL PROFILE

DIRECT, VISIBLE, FIXED ELECTRIC HEATING APPLIANCES

BRAZED ELECTRIC RADIATORS

Registration number: CORD-00001-V01.01-EN
Drafting rules: +PCR ed4-EN-2021.09.06+
Supplier accreditation number: VHSO
Valid until: 06-2025
Information and reference documents:
www.pep.ecopassport.org
Validity period: 5 years

Endorsed verification of the declaration and data in compliance with ISO 14025:2016

Internal ☐ External ☒

The PCR review was conducted by a panel of experts chaired by Julia Engelert (EDEMARI)
PEPs are compliant with NF C58-100:2002 and EN 15693:2019 or NF C58-500:2022. The components of the present PEP may not be compared with components from any other program.
Document complies with ISO 14025:2016. Environmental labels and declarations type B environmental declaration

PEP ecopassport® CORD-00001-V01.01-EN

PRODUCT ENVIRONMENTAL PROFILE

COMPANY INFORMATION

General information
Cordivari Srl - Zona Ind. Pagine Morro D'Oro Snc 64026 (TE) - Italy
info@cordivari.it

Legal contact within the company
Cordivari Srl is one of the leading Italian companies in the hydro-thermal-sanitary sector, specializing in the production of hydrothermal systems for domestic, civil, and industrial applications.
The company continuously renews its commitment by focusing on developing products and solutions that combine efficiency, reliability, and environmental sustainability.
Cordivari is certified according to UNI EN ISO 9001, UNI EN ISO 14001, and UNI EN ISO 45001 standards, implementing an integrated management system that ensures high quality standards and full customer satisfaction.

REFERENCE PRODUCT

Reference Product
Claudia® Electric

Category of the reference product:
Direct, visible, and fixed type electric heating appliance

Subcategory
Electric radiator type direct, visible, fixed heating appliance

Output (W)
1200

Dimensions (mm)
600x1807

Finish
With epoxy polyester powders with DIN 55900-1, 2 certified process.

Functional Unit
"To produce a heating power of 1 kW for a reference lifetime of 17 years"

TECHNICAL CHARACTERISTICS

Product mass (including packaging)
34,00 kg

Packaging mass
2,28 kg

Reference lifetime (RLT)
17 years

CONSTITUENT MATERIALS

The total mass of the product is 34,00 kg, including 31,71 kg of product and 2,28 kg of packaging.

Constituent materials	Metals	Plastics	Other materials
Carbon steel	47,7%	Polyethylene (PEPE)	0,8%
		ethylene glycol	41,7%
		Cardboard (recycled content 100%)	6,0%
		Electrical component	2,6%
		Epoxy-polyester powder	1,9%
Total	47,7%	Total	0,8%
		Total	51,5%

PEP ecopassport® CORD-00001-V01.01-EN

2

PRODUCT ENVIRONMENTAL PROFILE

ENVIRONMENTAL IMPACT INDICATORS

IMPACT CATEGORY	UNIT OF MEASUREMENT	TOTAL (Overall)	MANUFACTURING	DISTRIBUTION	INSTALLATION	USE	END OF LIFE	ENVIRONMENTAL IMPACT INDICATOR
Global Warming Potential (GWP)	kg CO ₂ eq	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01
Acid Equivalency Potential (AEP)	kg SO ₂ eq	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01
Ozone Depletion Potential (ODP)	kg CFC-11 eq	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01
Photochemical Oxidation Potential (POCP)	kg VOC eq	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01
Human Toxicity Potential (HTP)	kg TEP eq	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01
Ecotoxicity Potential (ETP)	kg TEP eq	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01
Acidification Potential (AP)	kg SO ₂ eq	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01
Global Warming Potential (GWP)	kg CO ₂ eq	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01
Acid Equivalency Potential (AEP)	kg SO ₂ eq	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01
Ozone Depletion Potential (ODP)	kg CFC-11 eq	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01
Photochemical Oxidation Potential (POCP)	kg VOC eq	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01
Human Toxicity Potential (HTP)	kg TEP eq	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01
Ecotoxicity Potential (ETP)	kg TEP eq	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01	1,85E+01

ENVIRONMENTAL IMPACT INDICATORS

Brazed electric radiators

1,24E+04 kg CO₂ eq

3,45E+05 kg SO₂ eq

1,82E-01 kg CFC-11 eq

1,74E+02 kg VOC eq

PEP ecopassport® CORD-00001-V01.01-EN

5

EPD-PEP
Environmental Product Declaration in accordance with ISO 14025 and EN 15804 for Electric Radiators

Certified painting process according to DIN 55900-1 and DIN 55900-2 standards

IGE
Institut für Gebäudetechnik
Lehrstuhl für Holz- und Bautechnik

Bericht über die Beschichtung für Raumheizkörper gemäß DIN 55900-1, 55900-2

No.: H.0006.I.524-COR

Zur Inspektionskarte umfasst 1 Seite(n).

1. Ausfertigung

Zur Bericht über eine schriftliche Genehmigung der Prüf- und Inspektionsstelle hat es keinen Gehalt.

Dieses Institut für Gebäudetechnik (IGE) ist ein vom Staat nach DIN EN ISO 9001:2015 zertifiziertes Werk nach der DIN EN ISO 9001:2015 akkreditierte Inspektionsstelle.

Seite 1/1

IGE
Institut für Gebäudetechnik
Lehrstuhl für Holz- und Bautechnik

No.: H.0006.I.524-COR

- Prüf- und Inspektionsstelle (Leistung)
- Inspektionskarte (Leistung)
- Qualitätsmanagement (Leistung)
- Hersteller (Leistung)
- Ort und Datum der Inspektion (Leistung)
- Auftrag (Leistung)
- Freigegebene Abweichungen zur Norm (Leistung)

Stuttgart, 2020-09-04

Prof. Dr.-Ing. Dr. Schmitt

Dr. Schmitt

IGE
Institut für Gebäudetechnik
Lehrstuhl für Holz- und Bautechnik

Bericht über die Beschichtung für Raumheizkörper gemäß DIN 55900-1, 55900-2

Datum	Seiten Nr.	Titel	Ja	Nein	Bemerkungen
01-04-2020	1	Antrag und Beschreibung der Beschichtung für Raumheizkörper nach DIN 55900-1, 55900-2	X		
01-04-2020	2	Antrag und Beschreibung der Beschichtung für Raumheizkörper nach DIN 55900-1, 55900-2	X		
01-04-2020	3	Antrag und Beschreibung der Beschichtung für Raumheizkörper nach DIN 55900-1, 55900-2	X		
01-04-2020	4	Antrag und Beschreibung der Beschichtung für Raumheizkörper nach DIN 55900-1, 55900-2	X		
01-04-2020	5	Antrag und Beschreibung der Beschichtung für Raumheizkörper nach DIN 55900-1, 55900-2	X		
01-04-2020	6	Antrag und Beschreibung der Beschichtung für Raumheizkörper nach DIN 55900-1, 55900-2	X		
01-04-2020	7	Antrag und Beschreibung der Beschichtung für Raumheizkörper nach DIN 55900-1, 55900-2	X		
01-04-2020	8	Antrag und Beschreibung der Beschichtung für Raumheizkörper nach DIN 55900-1, 55900-2	X		
01-04-2020	9	Antrag und Beschreibung der Beschichtung für Raumheizkörper nach DIN 55900-1, 55900-2	X		
01-04-2020	10	Antrag und Beschreibung der Beschichtung für Raumheizkörper nach DIN 55900-1, 55900-2	X		

Stuttgart, 2020-09-04

Prof. Dr.-Ing. Dr. Schmitt

Dr. Schmitt

Certificate of Conformity
Certification by the HLK laboratory (University of Stuttgart) to DIN 55900-1, 55900-2.

COMPANY SYSTEM CERTIFICATES



**Quality System Certificate
UNI EN ISO 9001**

Cordivari has always had among its goals:

- Continual improvement of its products
- Minimal environmental impacts
- Achievement of total quality

Cordivari worked in order to obtain the most important certifications showing the company engagement towards its internal system and external environment.



**Environment System Certificate
UNI EN ISO 14001**



**Safety Management System Certificate
UNI EN ISO 45001**

CE MARK

CE marking certifies compliance with the essential safety requirements and thermal performance assessment criteria set out in the applicable European Directives and Regulations for radiators.

APPLICABLE EUROPEAN DIRECTIVES AND REGULATIONS

Regulation (EU) 2024/3110 (CPR) establishing harmonised rules for the marketing of construction products.

MAIN TECHNICAL REFERENCE STANDARDS

UNI EN 442-1:2015

Radiators and Convectors – Part 1: Technical Specifications and Requirements.

UNI EN 442-2:2015

Radiators and Convectors – Part 2: Test Methods and Rating.

CE marking of Electric Radiators equipped with a thermostat or Home Automation control system, as well as of separate control devices, certifies compliance with the essential requirements for electrical safety, control performance and energy efficiency assessment in accordance with the applicable European Directives and Regulations.

APPLICABLE EUROPEAN DIRECTIVES AND REGULATIONS

Directive 2014/35/EU (LVD) on the harmonisation of the laws of the Member States relating to the making available on the market of electrical equipment designed for use within certain voltage limits.

Directive 2014/30/EU (EMC) on the harmonisation of the laws of the Member States relating to electromagnetic compatibility.

Directive 2014/53/EU (RED) on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment.

Directive 2012/19/EU (WEEE) on waste electrical and electronic equipment.

Directive (EU) 2017/2102 (RoHS) amending Directive 2011/65/EU on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

Directive (EU) 2015/863 (RoHS) amending Annex II to Directive 2011/65/EU as regards the list of restricted substances.

Directive 2009/125/EC (ErP) establishing a framework for the setting of ecodesign requirements for energy-related products.

Regulation (EU) 2024/1103 implementing Directive 2009/125/EC with regard to ecodesign requirements for local space heaters and separate control devices.

MAIN APPLICABLE TECHNICAL STANDARDS

EN IEC 60335-1:2023

Household and Similar Electrical Appliances – Safety – Part 1: General Requirements.

EN 60335-2-30:2009

Household and Similar Electrical Appliances – Safety – Part 2-30: Particular Requirements for Room Heaters.

EN IEC 60335-2-43:2020

Household and Similar Electrical Appliances – Safety – Part 2-43: Particular Requirements for Clothes Dryers and Towel Rails.

GENERAL SALES CONDITIONS AND WARRANTY

Sales of Cordivari's products are made according to the conditions listed below. Exceptions should be accorded in written by Cordivari Srl.

1. SHIPMENT

Goods are transported at buyer's risk and peril, even if they are shipped free of carriage. Goods have to be checked at the delivery about unaltered packaging, missing or confused products in the presence of the forwarder. Any claim has to be immediately communicated to the forwarder by appointing the shipment's document and by registered mail within 8 days from receipt of the goods (otherwise Cordivari Srl is cleared of his responsibilities).

2. DELIVERY TERMS

Delivery terms are indicative. Failure to comply with the agreed delivery terms for any reasons will not entitle the buyer to any compensation, cancellation or modification of the order without our prior consent. In case of strikes, lack in raw materials, or any other Act of God, Cordivari Srl reserves the right to decide proper countermeasures; in this case Cordivari Srl should be considered exempted from any responsibility. Shall ordered goods not be collected within agreed date, the same will be invoiced and stored with risks and costs charged to the customer.

3. DRY WEIGHT, MEASURES, SURFACES

Dry Weights, measures, surfaces, shapes, sizes, images and other figures related to the products are merely indicative and Cordivari Srl may at any time modify them.

4. ORDER CANCELLATION OR MODIFICATION

All orders are valid only if accepted in written form by Cordivari Srl. No orders shall be cancelled even partially without the consent of Cordivari Srl. It will not be possible to modify the order when the production has already started. Any cost deriving from the modifications or cancellation will be charge to the buyer.

5. RADIATORS/ACCESSORIES WARRANTY ON CONSTRUCTION DEFECTS

For Ardesia® tubular radiators and Claudia towel rail (hot water version) Cordivari Srl offers 5 years warranty. For Ardesia® in the finishing F28 TRANSPARENT SHINY the warranty period is 2 years.

- For all painted towel rails and single/double column living radiators Cordivari Srl offers warranty terms and period of 5 years only if radiators are installed in closed heating system.
- For towel rails and single column living radiators line in stainless steel Cordivari Srl offers 10 years warranty, only if radiators are installed in closed heating system.
- All electric radiators (stainless steel and mild steel) and all chromed radiators Cordivari Srl offers warranty terms and period according to the national law following the directive for warranties EU Directive 2019/771, including its subsequent amendments and additions.
- For accessories, customized products according to clients' requirements and other items not listed in present sales and warranty conditions, Cordivari Srl offers warranty terms and period according to the national law following the directive for warranties EU Directive 2019/771, including its subsequent amendments and additions, except for electrical and electronic components for which the warranty is 12 months.
- All the products in this catalogue are designed and made according to European Directives CE, EN, UNI, etc. Warranty and conformity of these products are valid only in countries that apply such regulations. For Extra UE countries, or for countries that do not follow these regulations, Cordivari Srl is not responsible for warranty and conformity.

WARRANTY WILL BE APPLICABLE AT THE FOLLOWING CONDITIONS:

- The warranty period starts with the date of the delivery of the material by Cordivari and this warranty is invalidated if the code of the radiator with the date is removed or modified.
- Warranty is only valid if Cordivari S.r.l. is notified by registered mail about the fault within 8 days since delivery.
- Warranty will take effect after having examined the defects and their causes in the Cordivari plant.
- The materials that have to be replaced or repaired must be shipped free of charge to the Cordivari plant.

Warranty will be applicable at the following conditions:

- materials must have been stored in good conditions and protected from the inclemency of the weather before installation;
- radiator did not have damages during transport, handling or installation;
- no alterations or reparations must be done without the prior consent of the seller;
- the buyer must have paid all the bills within the pre-established deadlines;

- if for cleaning none of those aggressive, corrosive, substances not suitable for radiators material have been used;
 - the installation must have been done by professionals and in conformity with all instructions and standards written on the technical data sheets provided by Cordivari S.r.l.;
 - no periodical emptying or charging of the system must have taken place;
 - no aggressive chemical substances must have been added to the water of the system
 - the working pressure and temperature shown in the catalogue must correspond to the current usage pressure and temperature;
 - the caps and Accessories used must be original Cordivari materials;
 - radiator has not been connected to a system with open expansion tank;
 - the radiators must not have been connected to the sanitary water system;
- The warranty doesn't cover construction or dismantling costs to move the product from/to the installation place.

In case of using antifreeze, it should never be used pure, but it has to be diluted before including in the heating system.

When you use anti-corrosion, it has to be compatible with all the material composing the heating elements of the radiator.

In case of preinstalled Cordivari's caps, each alteration of those caps will void the warranty of the product. Cordivari will not assume responsibilities for radiator assembled by other people and/even for caps which are not by Cordivari. Cordivari's warranty immediately cease in case of reparations or modifications on products without the previous agreement of Cordivari. Heating system should be without any remaining of metals, calamine, grease, and without presence of gas.

Before starting the heating system, rinse residuas from the installation/working.

Warranty will not be valid in case of damages caused by electrical system. The purchaser may not claim any other cost of direct or indirect damage to person or properties resulting from above confirmed defects.

For the purposes of the manufacturer's warranty operations, if requested by Cordivari Srl, the customer must allow an inspection to verify any anomalies subject of the claim. This inspection must be granted by the customer to personnel appointed by Cordivari Srl, within the deadline indicated by the company and, in any case, within a maximum deadline of fifteen days.

If the final customer refuses the inspection within the above mentioned maximum deadline, the manufacturer's warranty will not be valid, since the company had not the opportunity to verify the complaint reasons.

6. PAYMENTS

All invoices have to be paid according to the agreed deadline. Any delay, even partial may suspend the planned deliveries. Overdue interest could be charged at current rates.

7. GOODS' PROPERTY

Cordivari Srl remains owner of the delivered goods until they are not completely paid. In case of failure to proceed to the payment, Cordivari Srl could ask for immediate restitution of goods and keep the paid partial amount as indemnity. Cordivari Srl can reserve the right to evaluate bigger damages caused by the outstanding amount.

8. PRICES

Prices are not binding and can be modified without communication and can be modified on basis of the modifications which could appear before and during delivery. Prices are intended on FCA-MORRO D'ORO (Incoterm 2010 basis), except in case of written agreements. For some voluminous delivery Cordivari may charge some extra-costs. All prices indicated are V.A.T. excluded.

9. ORDERS/DELIVERY

The Order value is minimum Euro 2.000,00. Given orders are binding to the buyer, who acknowledges of all our sales conditions.

Delivery is considered to customer main place/warehouse; for any different destination please get in touch with our sales dept.

10. COURT AUTHORITY

For the following Catalogue and conditions only the provisions of Italian law will be used. For controversy, the Court of Teramo (Italy) shall have exclusive competence. Essential and trial law shall be exclusively Italian.

11. ORIGINAL VERSION


Being a translation, the Italian language is the only valid language for interpretation and conditions of this catalogue version.

© Copyright Cordivari Srl

All right such as reproduction, diffusion and translation are reserved. No part of this brochure can be reprinted or reproduced to any other form without a written authorization by Cordivari Srl. The present catalogue substitutes and invalidates all previous editions. Cordivari reserves the right to modify in every moment products and figures reported in the catalogue and has no responsibility for any press mistake. The product sheets and catalogs shown on the company website are always updated to the latest version.



FOLLOW US



www.cordivari.com

CORDIVARI SRL

Z. I. Pagliare 64020 Morro D'Oro (TE) Italy · cordivari.com · Tel. +39 085 8040714 Fax +39 085 8041273
C.F.-P.IVA-VAT Id nr. IT00735570673 · REA TE Nr.92310 · Cap. Sociale € 10.000.000,00 i.v. · UNI EN ISO 9001 · 14001 · 45001

