

MINI WALL € 2021.EX



MINI WALL

Strikingly discrete

- Extremely suited to spaces with large windows and for dwarf walls under window seats.
- Heights from 8cm
- Beautiful in combination with the free-standing Mini for glazed façades.
- Stable one-piece casing.
- Low-H₂O technology with super conductive and ultra fast heat exchanger for low energy consumption and maximum heat emission.
- Twin Power for better compensation of the downward cold air flow next to glazed façades or ventilation grilles.
- Safe surface temperature.
- **A 30 year guarantee** on the heat exchanger.

Also available as freestanding model for glazed façades. See page 136.

MINI WALL sandblast grey (001)





MINI WALL




MINI WALL MOUNTED MODEL




DIMENSIONS (in cm)

HEIGHT 008 (opposite end connections)

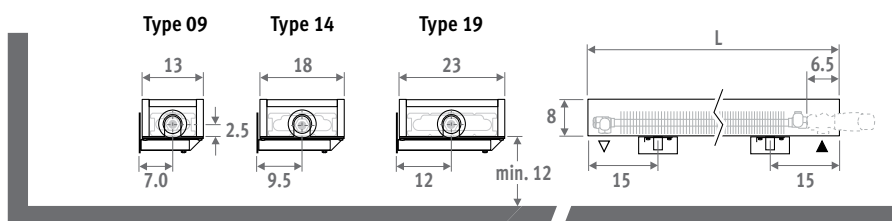

HEIGHT 013


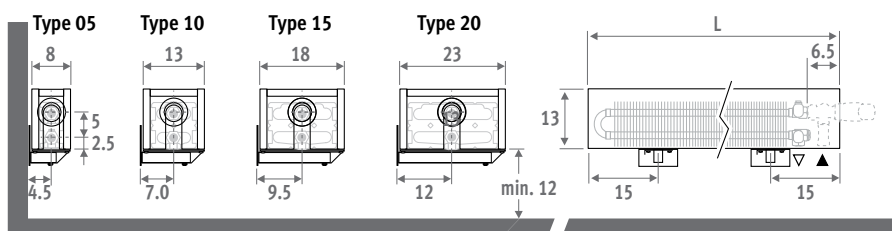


Also available as freestanding model for glazed façades. See page 136.

ORDERING CODE

code	height	length	type	colour
MINW .	008	060	09 .	XXX
fill in colour code ↴				

HEIGHT 023 / 028

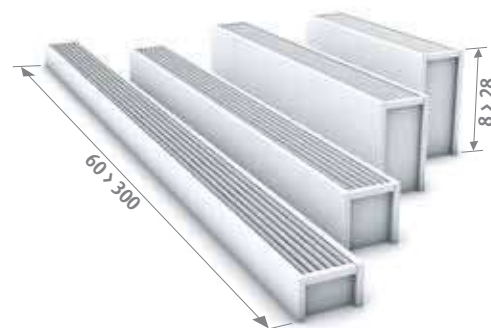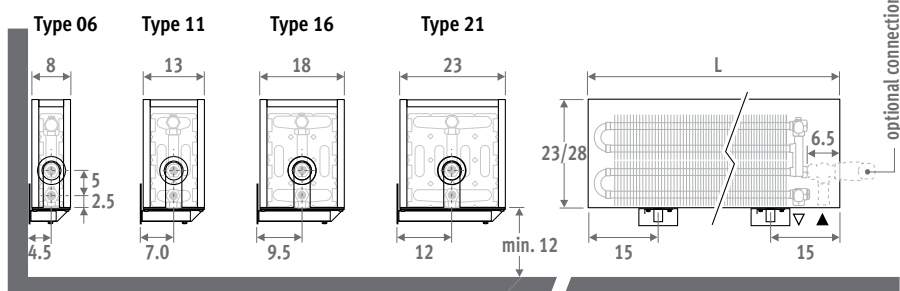

DELIVERY

Easy to install by one person.

Standard delivery:

- Low-H₂O heat exchanger, air vent 1/8" and drain plug 1/2"
- casing in one piece for connection left or right
- wall brackets in the same colour as the casing

COLOURS

Environmentally friendly, scratch-resistant, high UV resistant powder coating.

Standard colours:

- traffic white RAL 9016 (133), soft touch lightly structured satin lacquer
- sandblast grey (001), fine texture metallic lacquer

Other colours: see colour chart.


CONNECTION

Standard connection:

Height 008: opposite end connection, flow left or right

Other heights: same end connection, left or right connection.

It is not possible to connect to the wall from inside the casing, as the casing includes a closed rear panel.



CONNECTION SETS

Mini height 013/023/028


Connection to the floor:

use set 104 (see page 318)

Connection to the wall:

Jaga H-valve for one or two pipe

TRV head and sleeve couplings Eurocone 3/4" included.

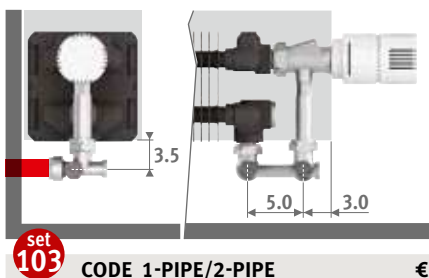

CODE 1-PIPE/2-PIPE €



COLO.HBSW.AW.4...



COLO.HBSW.JW.4...

fill in sleeve coupling code

Precision metal tube 15/1 **115**

Precision metal tube 16/1 **116**

RPE/ALU tube 16/2 **616**

RPE/ALU tube 20/2 **620**

Other connections:

See chapter "Connection sets and valves Low-H₂O" for all connection options and technical information

MINI WALL

MINW.HHH LLL TT.XXX

	Type	Watts	Watts	€	€	Type	Watts	Watts	€	€	Type	Watts	Watts	€	€	Type	Watts	Watts	€	€
	75/65	55/45	st. colour		other	75/65	55/45	st. colour		other	75/65	55/45	st. colour		other	75/65	55/45	st. colour		other
L	H 008					H 013					H 023					H 028				
060	---	---	---			05	197	95			06	323	156	-----	-----	06	342	166		
	09	255	123			10	303	146			11	601	285			11	653	310		
	14	416	200			15	508	244			16	785	370			16	860	405		
	19	572	275			20	717	345			21	1021	479			21	1127	528		
070	---	---	---			05	230	111			06	377	182			06	399	193		
	09	298	143			10	354	170			11	701	333			11	762	362		
	14	486	234			15	593	285			16	916	432			16	1003	473		
	19	667	321			20	837	403			21	1191	559			21	1315	616		
080	---	---	---			05	263	127			06	431	208			06	456	221		
	09	340	163			10	404	194			11	802	381			11	871	414		
	14	555	267			15	678	326			16	1046	494			16	1146	540		
	19	762	366			20	956	460			21	1361	639			21	1503	704		
090	---	---	---			05	296	143			06	485	234			06	513	248		
	09	383	184			10	455	219			11	902	428			11	980	465		
	14	625	300			15	762	367			16	1177	555			16	1290	608		
	19	858	412			20	1076	518			21	1531	719			21	1691	792		
100	---	---	---			05	329	158			06	539	260			06	570	276		
	09	425	204			10	505	243			11	1002	476			11	1089	517		
	14	694	333			15	847	407			16	1308	617			16	1433	676		
	19	953	458			20	1195	575			21	1701	799			21	1879	880		
110	---	---	---			05	362	174			06	593	286			06	627	304		
	09	468	225			10	556	267			11	1102	523			11	1198	569		
	14	763	367			15	932	448			16	1439	679			16	1576	743		
	19	1048	504			20	1315	633			21	1871	878			21	2067	968		
120	---	---	---			05	395	190			06	647	312			06	684	331		
	09	510	245			10	606	291			11	1202	571			11	1307	621		
	14	833	400			15	1016	489			16	1570	741			16	1720	811		
	19	1144	550			20	1434	690			21	2041	958			21	2255	1056		
140	---	---	---			05	461	222			06	755	364			06	798	386		
	09	595	286			10	707	340			11	1403	666			11	1525	724		
	14	972	467			15	1186	570			16	1831	864			16	2006	946		
	19	1334	641			20	1673	805			21	2381	1118			21	2631	1233		
160	---	---	---			05	526	253			06	862	416			06	912	442		
	09	680	327			10	808	388			11	1603	761			11	1742	827		
	14	1110	533			15	1355	652			16	2093	988			16	2293	1081		
	19	1525	733			20	1912	920			21	2722	1278			21	3006	1408		
180	---	---	---			05	592	285			06	970	468			06	1026	497		
	09	765	368			10	909	437			11	1804	857			11	1960	931		
	14	1249	600			15	1525	734			16	2354	1111			16	2579	1216		
	19	1715	824			20	2151	1035			21	3062	1438			21	3382	1584		
200	---	---	---			05	658	317			06	1078	520			06	1140	552		
	09	850	408			10	1010	485			11	2004	952			11	2178	1034		
	14	1388	667			15	1694	815			16	2616	1234			16	2866	1351		
	19	1906	916			20	2390	1150			21	3402	1597			21	3758	1761		
220	---	---	---			05	724	349			06	1186	572			06	1254	607		
	09	935	449			10	1111	534			11	2204	1047			11	2396	1138		
	14	1527	734			15	1863	896			16	2878	1358			16	3153	1486		
	19	2097	1008			20	2629	1265			21	3742	1757			21	4134	1937		
240	---	---	---			05	790	381			06	1294	624			06	1368	662		
	09	1020	490			10	1212	582			11	2405	1142			11	2614	1241		
	14	1666	801			15	2033	978			16	3139	1481			16	3439	1621		
	19	2287	1099			20	2868	1380			21	4082	1916			21	4510	2113		
260	---	---	---			05	855	412			06	1401	676			06	1482	718		
	09	1105	531			10	1313	631			11	2605	1237			11	2831	1344		
	14	1804	867			15	2202	1059			16	3401	1605			16	3726	1756		
	19	2478	1191			20	3107	1495			21	4423	2076			21	4885	2289		

Mini wall mounted model is also available in lengths
280 and 300 cm, see: www.jaga.com

EN442 output at 20°C room temperature

NOTES

NOTES

jaga

CLIMATE DESIGNERS

Jaga International
Verbindingslaan 16
B-3590 Diepenbeek

Tel.: +32 (0)11 29 41 12
Fax: +32 (0)11 29 41 60
export@jaga.com

The information in this price list is correct at the time of printing.
Jaga reserves the right to change product specification at any time in line
with our policy of continuous improvement and innovation.
All prices in Euro, exclude VAT. Prices valid from July 1, 2021.
Replaces all existing price lists.